


ELECTRICAL TEST:

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 2.5 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

WIRE CONNECTION

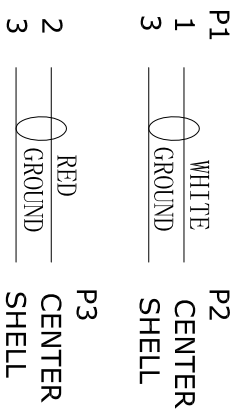

REV	ECN	TOLERANCE INCHES M/M	DESCRIPTION	DATE	NAME
8			heat-shrinkable tubing ~ ϕ 2.0MM~BLACK~	0.01	pcs
7			TRANSPARENT PE ROHS LDPE	4	g
6		.X .XX .XXX	45P RED PVC ROHS 45P WHITE(N-BHC 2001) PVC ROHS 45P BLACK PVC ROHS	6 6 6	g g g
3			RCA M SHELL PLATED:NICKEL BLACK INSULATION	2	pcs
2			DC3.5 M SHELL PLATED:NICKEL THREE TYPE	1	pcs
1			NO UL [7/0.127TC*1C+S(28/0.10TC)] *2F OD:2.8*2.8MM BLACK PVC	5	m
NO			DESCRIPTION	Q'TY	UNIT

SCALE	UNIT	MM	DATE	2019.10.22	REV.	AO
NONE	MM				1/1	

DESCRIPTION	DATE	NAME
DESCRIPTION	11.09.4345	

TITLE:	DRAWING NO.:
ROLINE 3.5mm/ 2XRCA (M) Cable 5.0m	CA1790169

APPD BY	CHECK BY	DRAWN BY
		ZHOUWENLONG

REV	ECN	TOLERANCE INCHES M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

