



Push mount ties

Material: UL approved Nylon 66


Fireproof: 94V-2

Operating temperature: -40 to 85 (-40 to 185)

Color: Natural, black, other colors are available upon request

Feature: UL approved, weather-resistant, heat-resistant, and cold-resistant. The wing design of the mount helps stabilize the tie in high vibration applications

Application: Insert cable tie into the hole of the main board and bind up the electric wire firmly

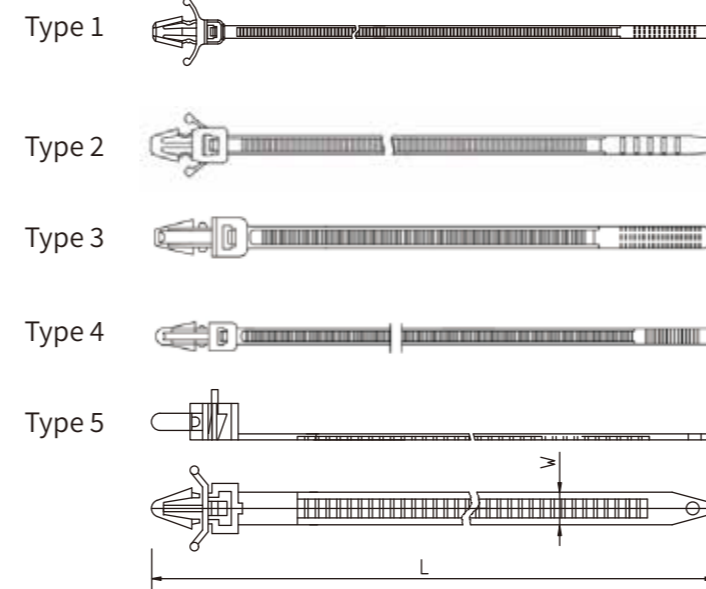

Item No.	Type	Length		Width		Max Bundle		Min. Tensile Strength		Pack Quantity
		[mm]	[in]	[mm]	[in]	[mm]	[in]	[kgs]	[lbs]	[pcs]
099.2090	Type 1	110	4.3	2.5	0.10	22	0.9	8.1	18	100
099.2092		130	5.1	4.8	0.19	25	1.0	22.2	50	100
099.2094		170	6.7	4.8	0.19	38	1.5	22.2	50	100
099.2095		190	7.5	4.8	0.19	45	1.8	22.2	50	100
099.2091	Type 2	130	5.1	3.6	0.14	28	1.1	13.6	30	100
099.2098	Type 3	150	5.9	3.6	0.14	32	1.3	13.6	30	100
099.2099	Type 4	200	7.9	4.8	0.19	46	1.8	22.2	50	100
099.2096	Type 5	150	5.9	7.6	0.30	32	1.26	13.6	30	100