

System General

Operating Freq. Range: 2400-2483.5MHz



Transmitting Power: 17dBm Max.

Monitor Sensitivity: -88dBm

Spread Spectrum TX: FHSS

Modulation: GFSK


Data Rate: 3Mbps

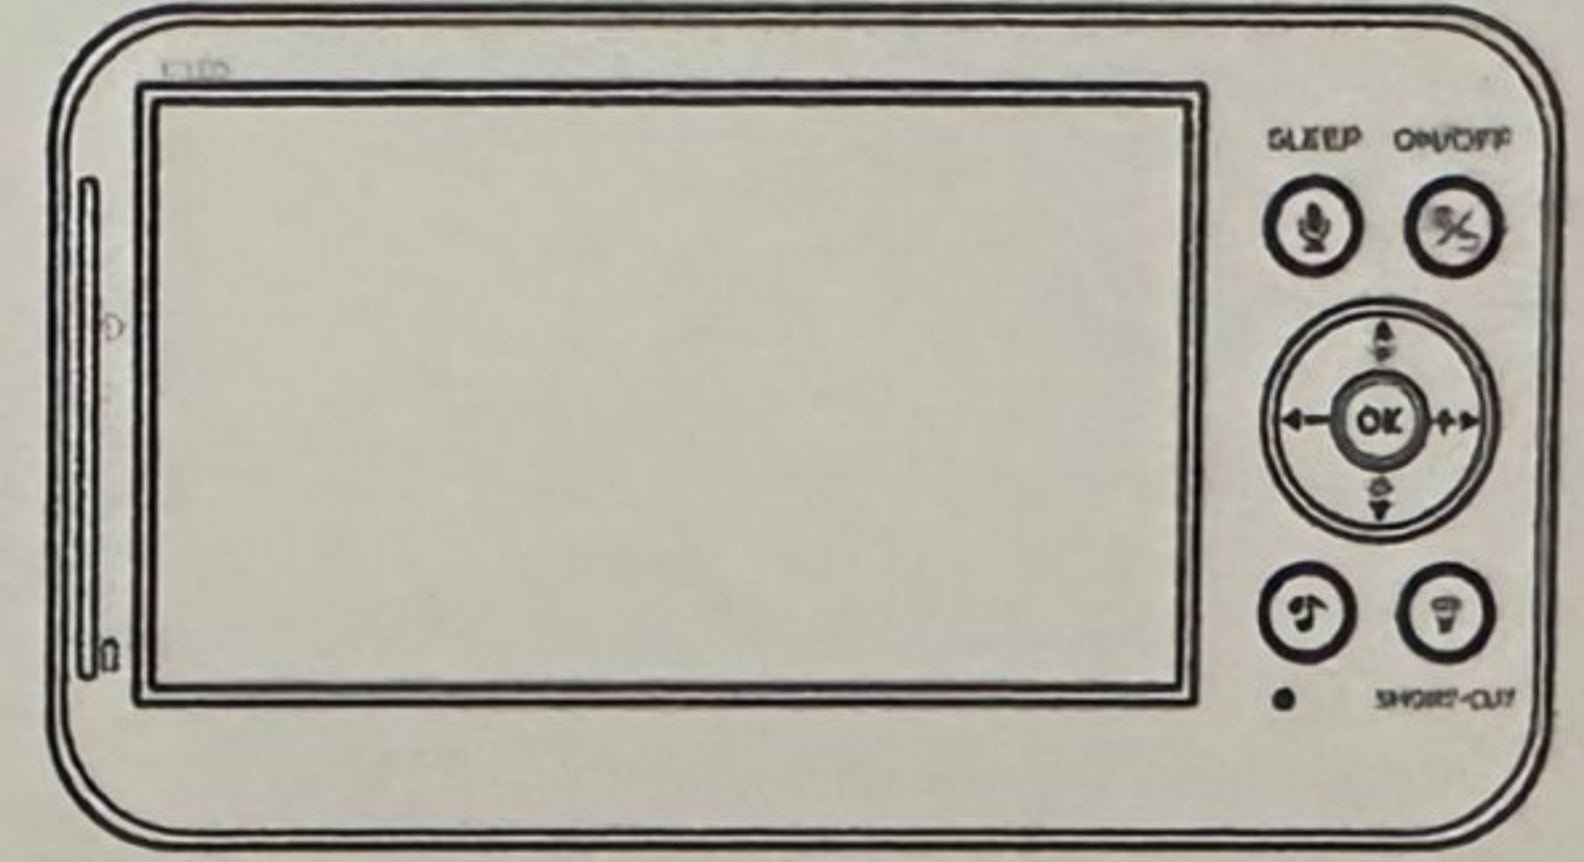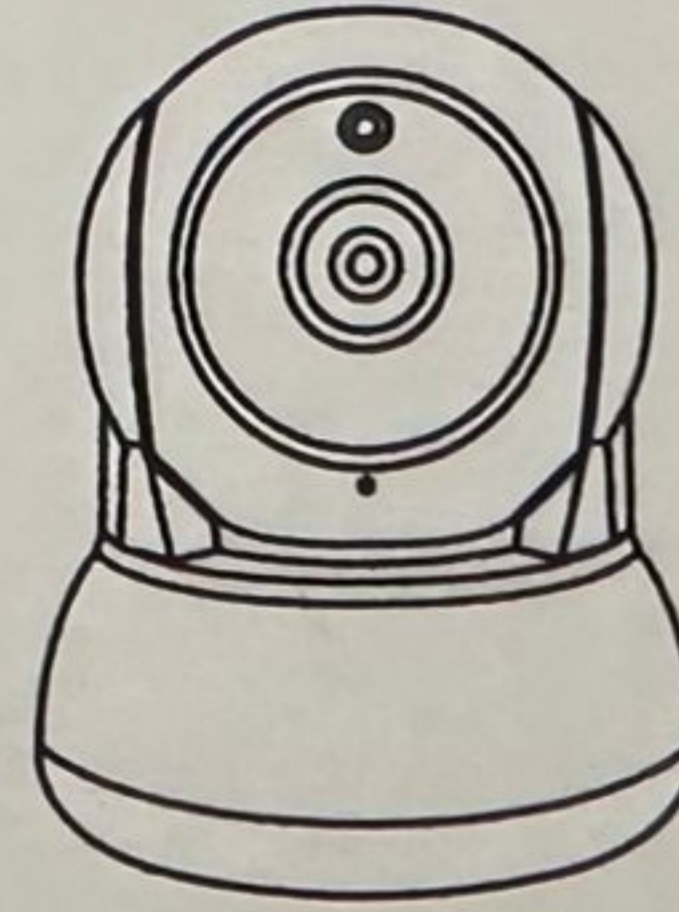

Power Adapter



User Manual

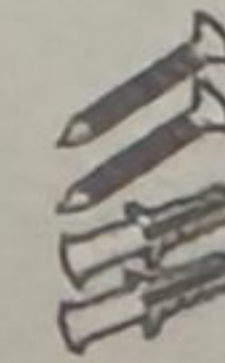

Screw Set



Bracket

Wireless Camera

Effective Pixel: 1 megapixels

IR LED Type/Night Vision: 9 pcs IR LED

Power Input: DC 5V

Built in Microphone/Speaker

Wireless Monitor

Display Type/Size: Color TFT 5 inch

Power Input: DC 5V

Battery: 3.7V Li-polymer

⚠ WARNING

STRANGULATION HAZARD Children may be entangled in cords. Make sure the adapter cables keep out of reach of children at least 6 feet (2 meters) away.



CE RoHS FC

