


max. 2000W (cosφ=1)



max. 1000VA (cosφ=0,5)

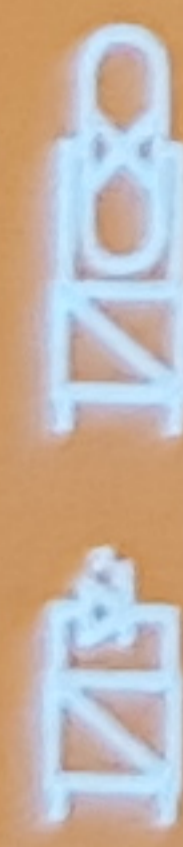

max. 800 A/200μs

30x(1x18W), 25x(2x18W)

25x(1x36W), 15x(2x36W)

20x(1x58W), 10x(2x58W)




Contact 2

max. 230W/230V

max. 1A (cosφ=1) HLK

Designed and engineered by STEINEL Germany.
Made in Romania by STEINEL.

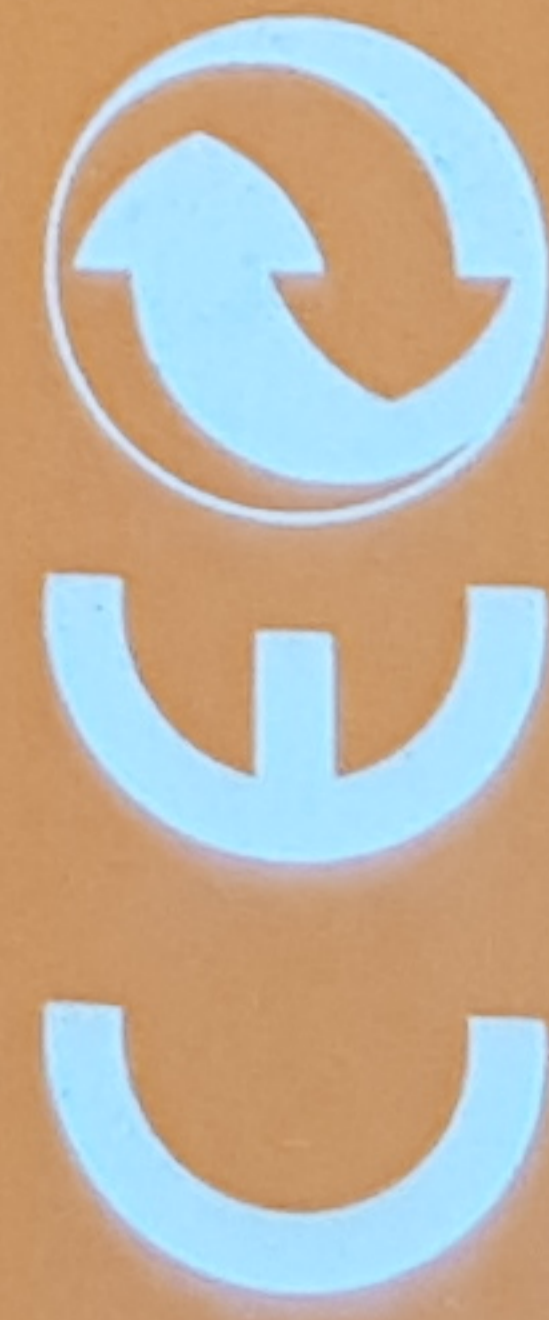

PROLog

RELUX member

IP20

220-240V,
50/60 Hz

120 x 120 x
73 mm




STEINEL Vertrieb GmbH

Dieselstraße 80-84

D-33442 Herzebrock-Clarholz

Germany

www.steinel-professional.de

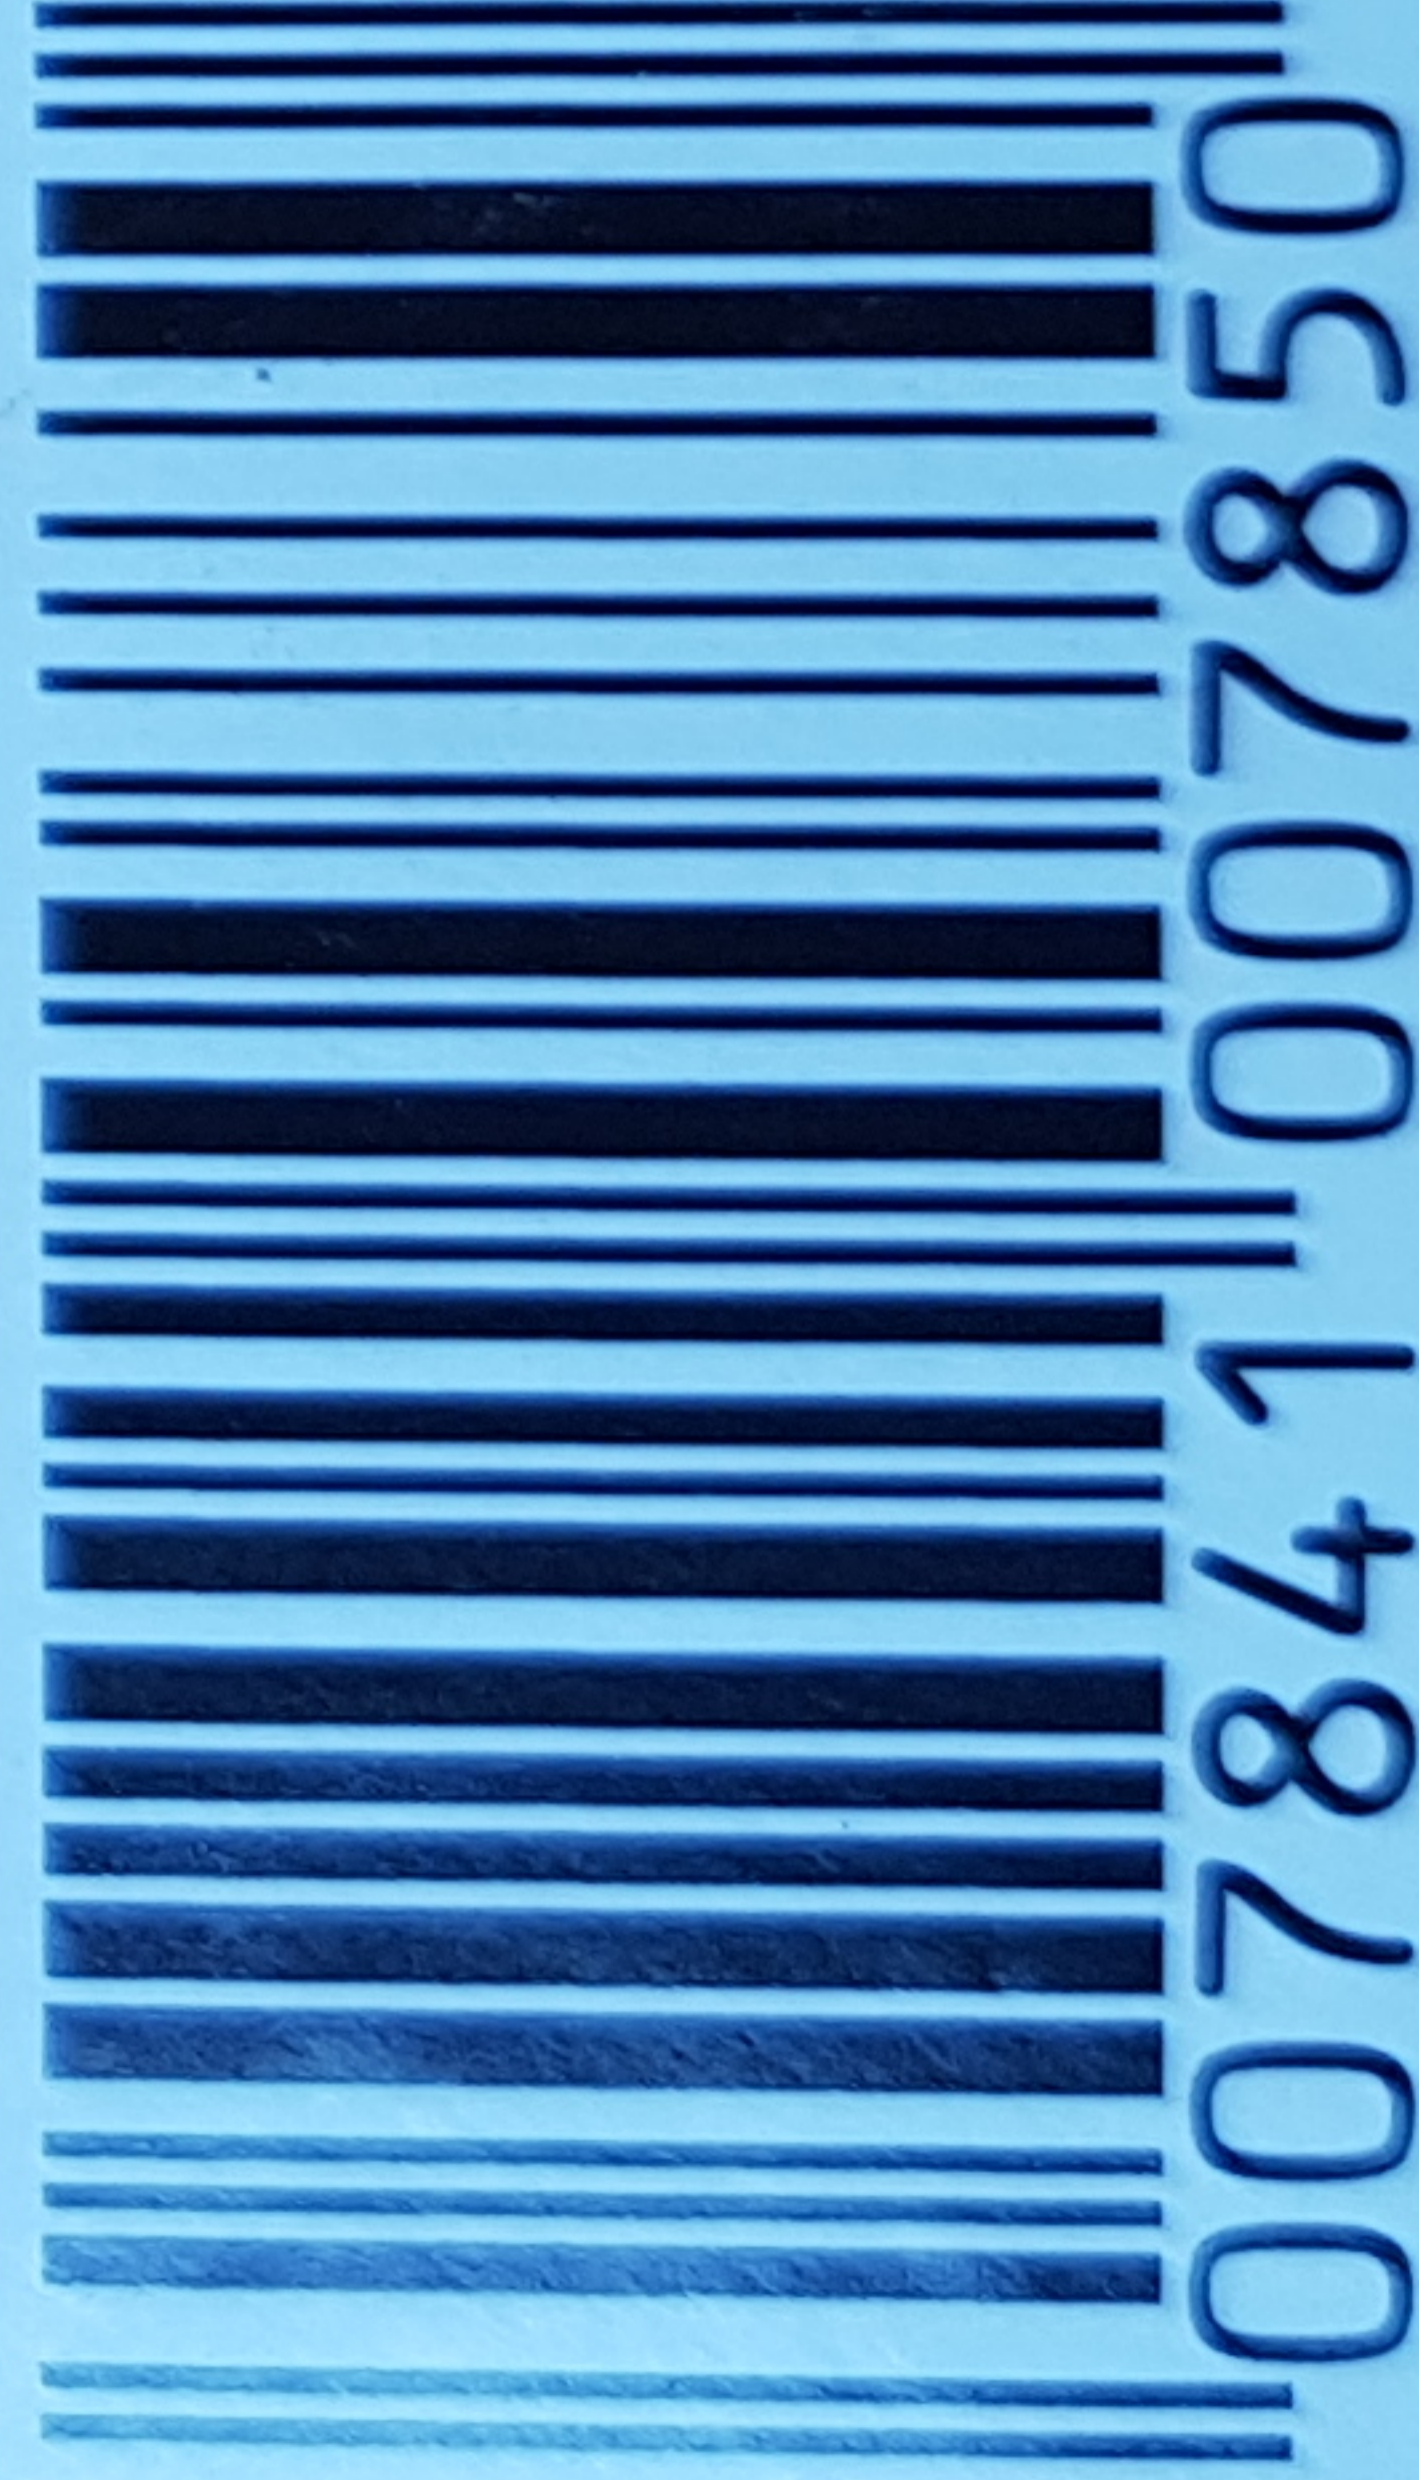

110036345 09/2014