
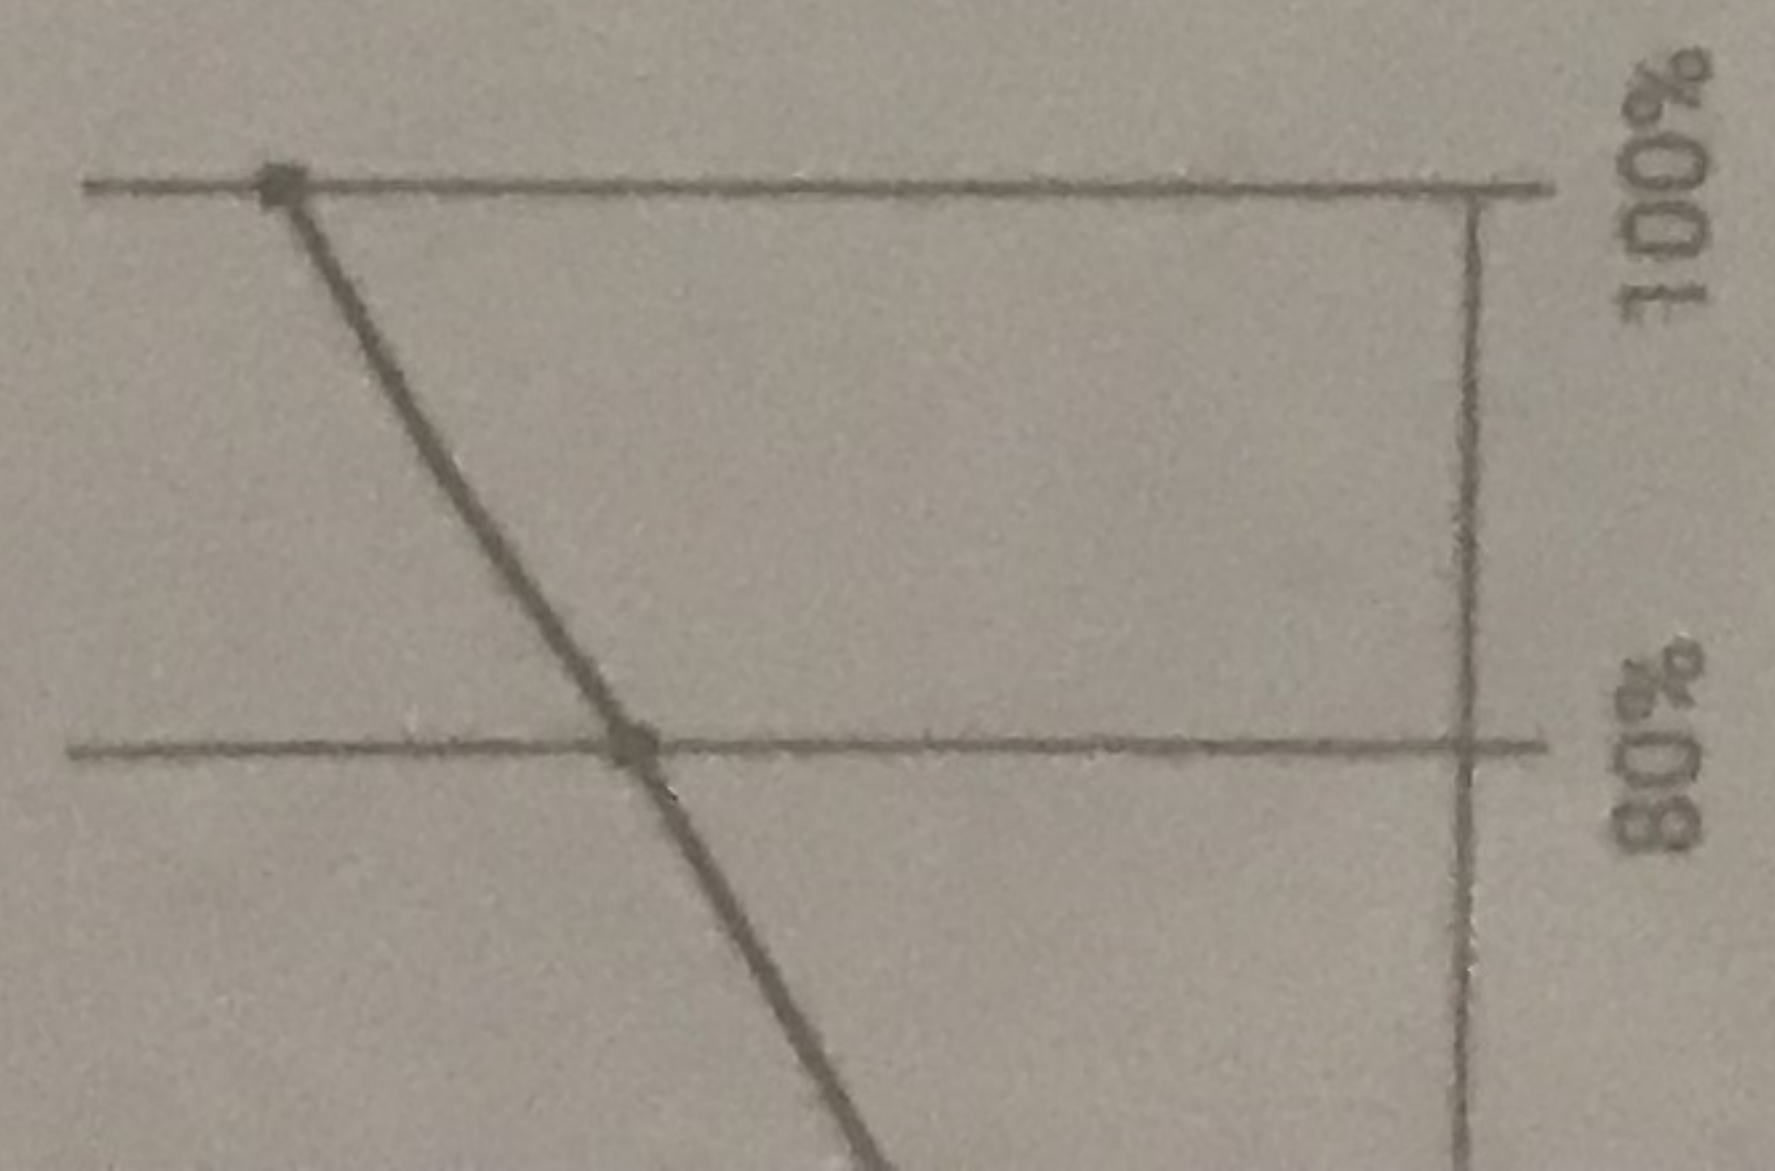


Model No. PK650D-F20





Type	ATX12V V2.4
Product Dimensions	150x140x86mm (W x L x H)
80PLUS Certifications	Bronze
Fan Size	120mm
Fan Bearing	Hypro Bearing
Topology	Active PFC+DC to DC
Capacitors	Taiwan capacitor
Power Good Signal	100-150ms
Hold Up Time	≥16ms(80% Load)
Efficiency	≥85% Under Typical Loading
Protection	SCP,OPP,OTP,OVP,DCP
Operation Temperature	0-40°C
Erp Regulation	ErP 2013
MTBF	100,000 Hours
Warranty	5 Years

AC Input	100-240Vac	10A-5.0A	50-60Hz		
DC Output	+3.3V	+5V	+12V	-12V	+5VSB
Max Output Current	20A	20A	54A	0.3A	2.5A
Max Combined Wattage	110W		648W	3.6W	12.5W
Total Output	650W				

Cable type	Non-Modular, Black Flat Cable	
Connector	Number of Cable	Cable Length
Main Power Connector (20+4)Pinx1	1	500mm
CPU(4+4)Pin x 2	1	620mm+120mm
PCI-E(6+2)Pin x 2	2	500mm+120mm
SATA x 3	1	400mm+100mm+100mm
SATA x 4	1	400mm+100mm+100mm+100mm
4Pin Peripheral x 4	1	400mm+100mm+100mm+100mm

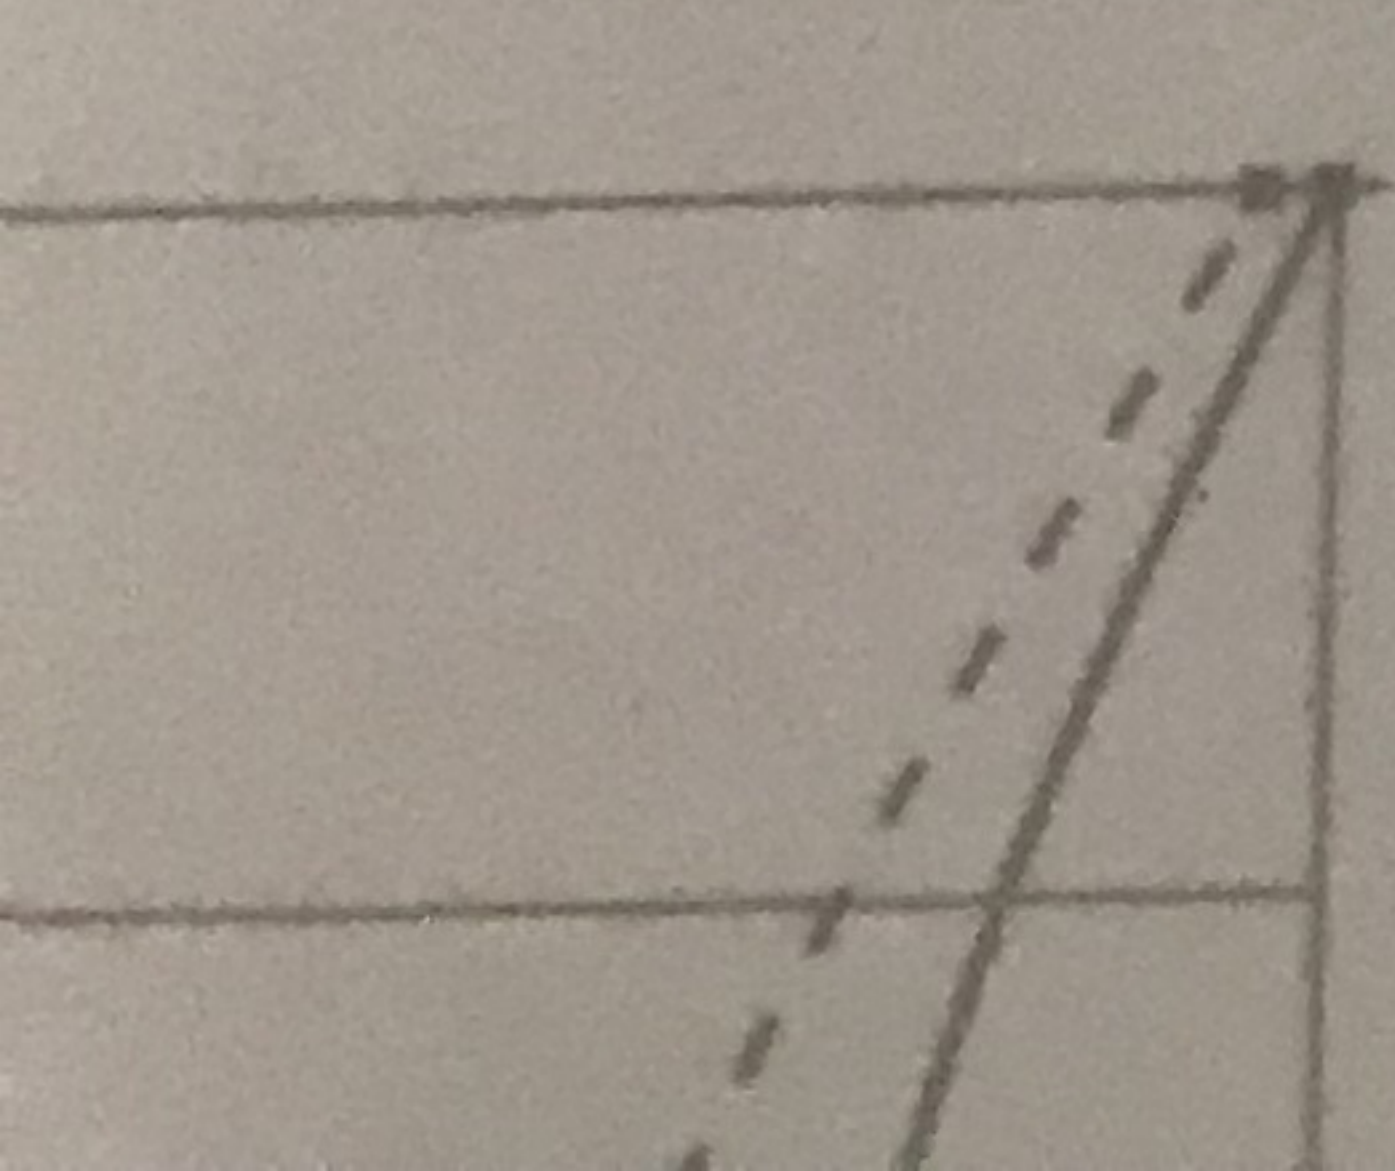


CAN ICES-003(B)/NMB-003(B)

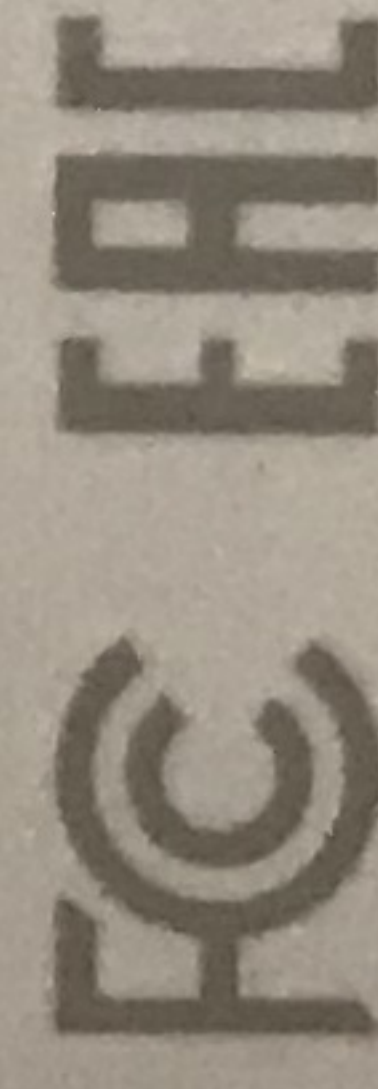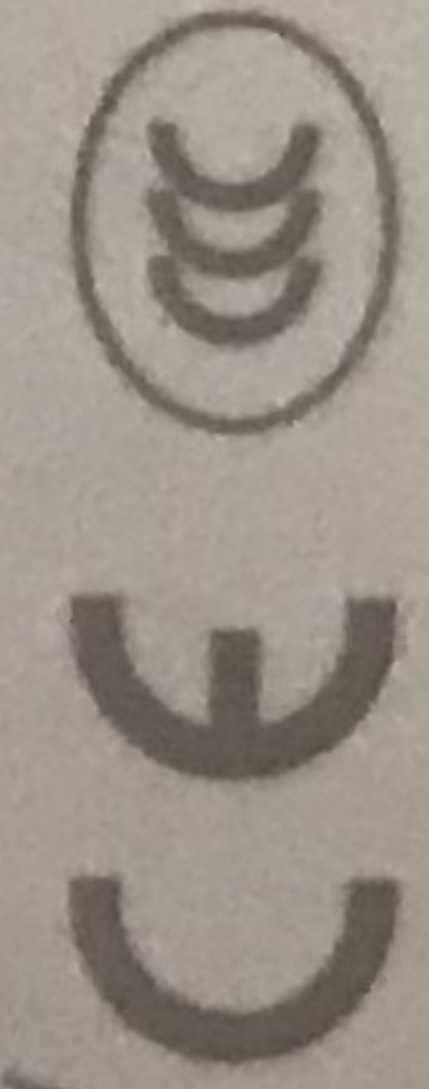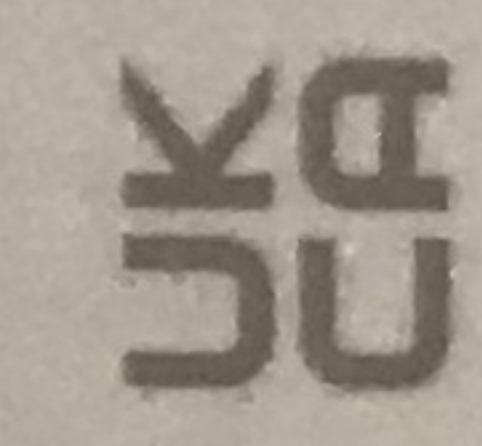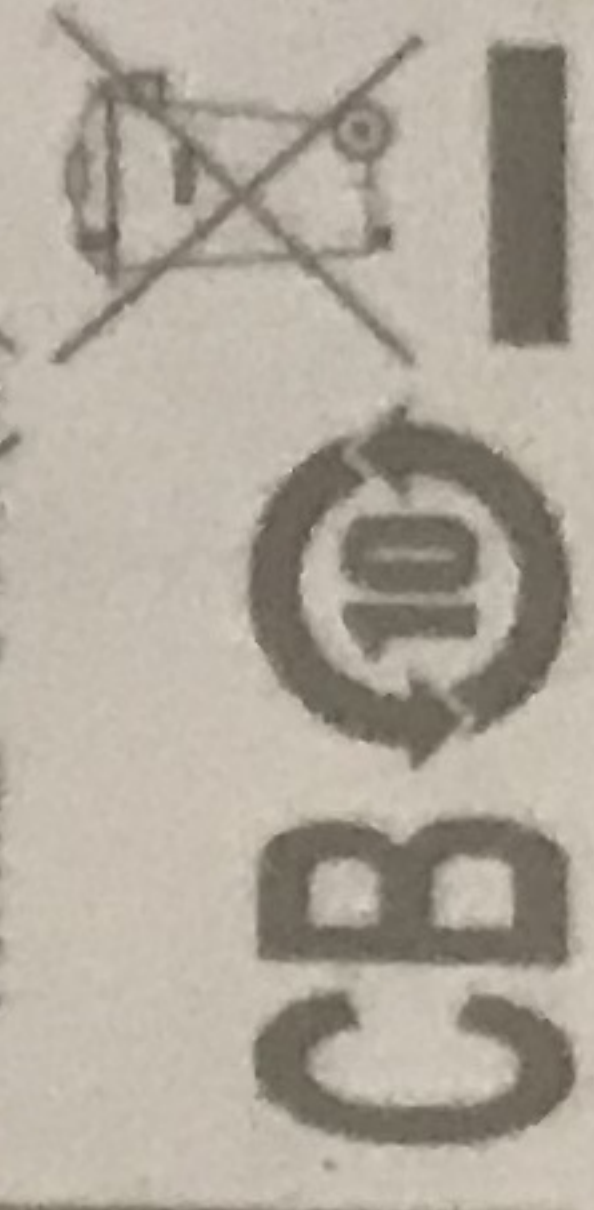

IS-13252(PART1)/IEC 60950-1


R-41178519 www.bis.gov.in

10000124090CA224001417

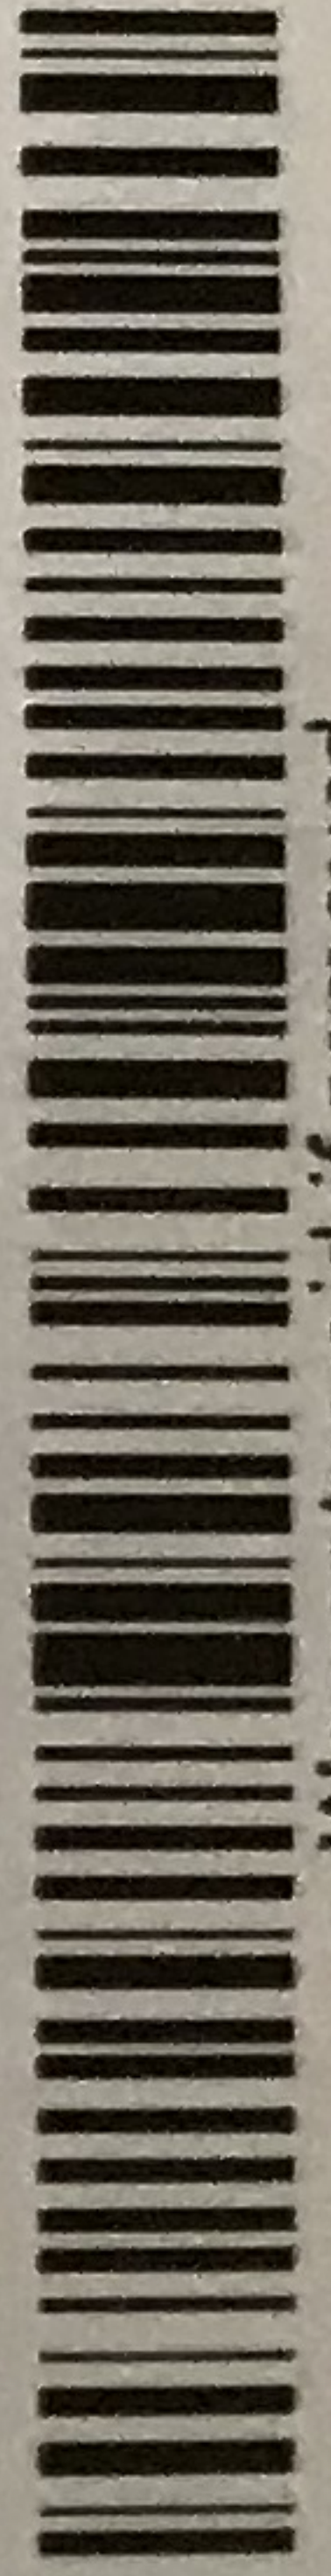

Warranty void if removed

R-PK650D-FA0B-EU

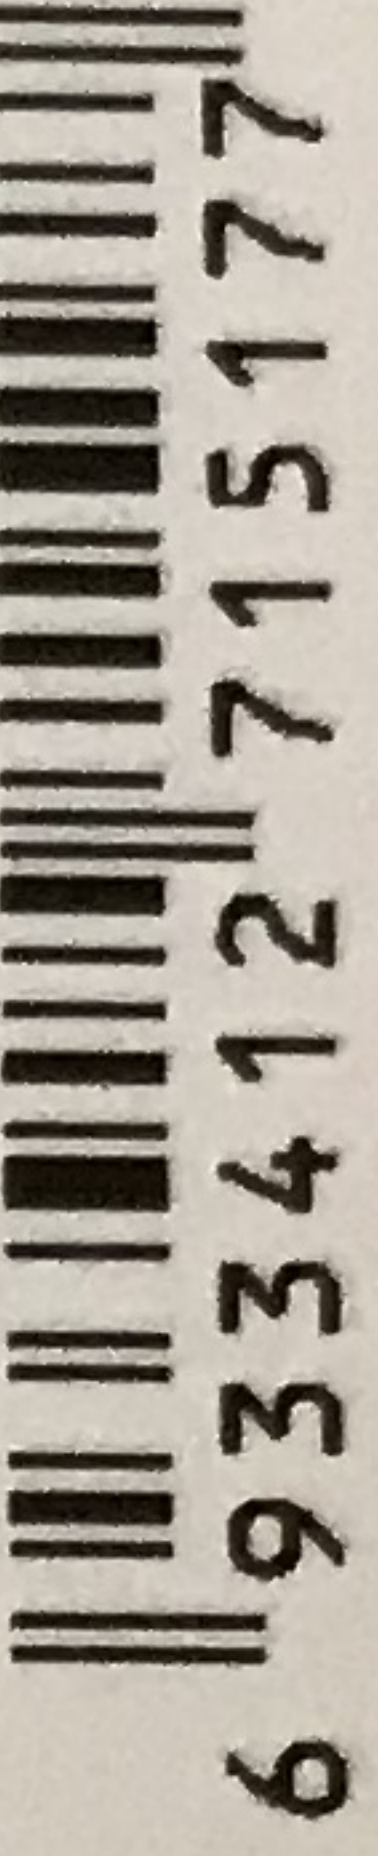

MADE IN CHINA