

# ATOF® BLADE FUSE RATED 32V



## Description

Developed by Littelfuse for the automotive industry, the ATOF® fuse has become the original equipment circuit protection standard for foreign and domestic automobiles and trucks. Readily identifiable and easily replaced, this fuse can be specified for a variety of low voltage electronic applications.

## Specifications

Complies with:	ISO 8820 - 3 UL 248 Special Purpose Fuse
Voltage Rating:	32 VDC
Interrupting Rating:	1000A @ 32 VDC
Operating Temperature Range:	-40°C to +105°C
Terminals:	Sn plated

## Ordering Information

Part Number	Package Size
0287xxx.PXCN	2000
0287xxx.H	100

## Time-Current Characteristics

% of Rating	Opening Time	Opening Time Min / Max (s)
100	35-40	360,000 s / -
110	1-30	360,000 s / -
135	1-2 3-40	350 ms / 600 s 750 ms / 600 s
200	1-2 3-40	100 ms / 5.0 s 150 ms / 5.0 s
350	1-2 3-40	20 ms / 500 ms 80 ms / 500 ms
600	1-30 35-40	- / 100 ms - / 150 ms

## Ratings

Part Number	Current Rating	Housing Color	Typ. Voltage Drop	Cold Resistance	I <sup>2</sup> t
0287001_	1 A	Black	176 mV	123 mΩ	0.4 A <sup>2</sup> s
0287002_	2 A	Grey	141 mV	53.5 mΩ	1.4 A <sup>2</sup> s
0287003_	3 A	Purple	137 mV	31.1 mΩ	7.4 A <sup>2</sup> s
0287004_	4 A	Pink	136 mV	22.8 mΩ	14 A <sup>2</sup> s
0287005_	5 A	Orange	128 mV	17.85 mΩ	26 A <sup>2</sup> s
028707.5_	7.5 A	Brown	116 mV	10.91 mΩ	60 A <sup>2</sup> s
0287010_	10 A	Red	109 mV	7.70 mΩ	115 A <sup>2</sup> s
0287015_	15 A	Blue	102 mV	4.80 mΩ	340 A <sup>2</sup> s
0287020_	20 A	Yellow	98 mV	3.38 mΩ	520 A <sup>2</sup> s
0287025_	25 A	White	92 mV	2.52 mΩ	1080 A <sup>2</sup> s
0287030_	30 A	Light Green	84 mV	1.97 mΩ	1510 A <sup>2</sup> s
0287035_	35 A	Dark Green	87 mV	1.61 mΩ	2280 A <sup>2</sup> s
0287040_	40 A	Yellow-Orange	96 mV	1.44 mΩ	3310 A <sup>2</sup> s


Corresponding holder see Section "Fuse Holders."

**ATOF® BLADE FUSE RATED 32V**




**Dimensions**

Dimensions in mm

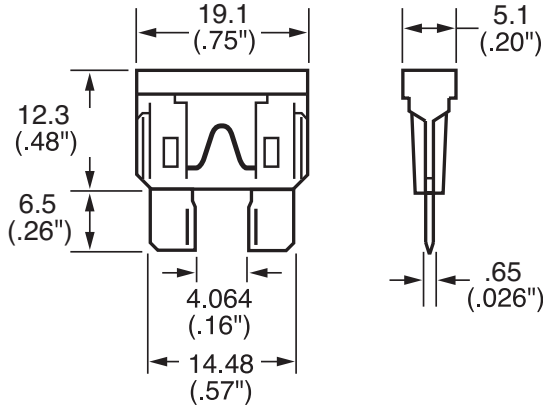

**Temperature Derating Curve**

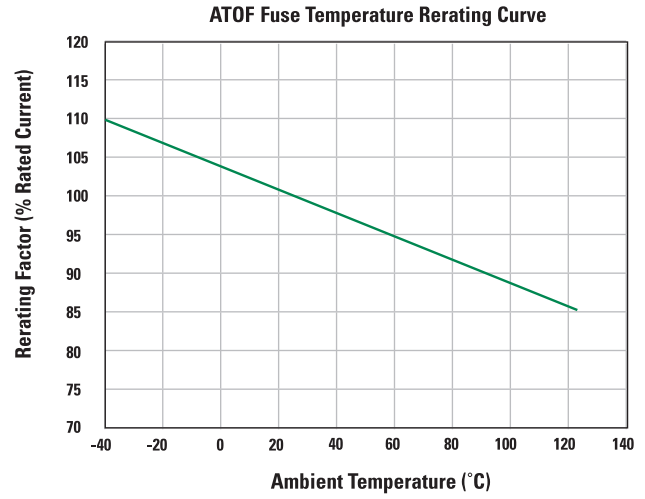

**Time-Current Characteristic Curves**

