NEW

SUPERWINCH | TERRA SERIES

TERRA 3500/SR

Terra series winches from Superwinch are designed specifically for the rugged demands of ATV and UTV enthusiasts. Available with wire or synthetic rope, each winch is loaded with a powerful motor, steel gearing and a steel drum for long lasting durability. Free spool function is simple to manage with a easy-to-engage ergonomic control knob. Each winch includes a 10' wired remote control and a handlebar mounted rocker switch for dependable control and maximum versatility. The Terra series winches have an IP67 rating for water and dust protection so they are always read for action.

LIMITED LIFETIME MECHANICAL WARRANTY

LIMITED 3 YEAR ELECTRICAL WARRANTY

IP67 PROTECTION RATED

FEATURES AND BENEFITS:

- 3,500 lbs capacity
- 1.6 HP permanent magnetic motor
- Clockable motor
- 3-Stage planetary gearing with 198:1 ratio
- Heavy-duty steel drum
- All steel gear set
- Sealed solenoid with circuit breaker
- Easy to engage ergonomic freespool control knob
- IP67 protection from water and dust
- 7/32" - 32' wire rope
- 7/32" - 32' synthetic rope
- Heavy-duty, clevis pinned, latched hook
- 4-way roller fairlead (wire rope)
- Aluminum hawse fairlead (synthetic rope)
- 10' handheld remote with handlebar rocker switch
- Universal mounting plate
- Mounting bolt pattern 3" x 4.87"
- Gray wrinkle powder coat finish



PN# 1135260




PN# 1135270



10' HANDHELD REMOTE INCLUDED

DIMENSIONS

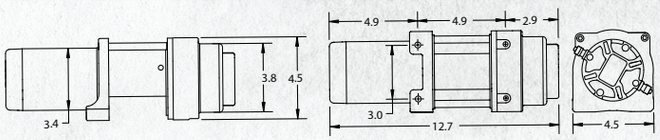

TERRA SPECIFICATIONS

LINE SPEED AND MOTOR CURRENT [FIRST LAYER]

LINE PULL	Lbs.	0	1000	2000	3000	3500
	kg	0	454	907	1360	1589
LINE SPEED	FPM	16	10.5	9.2	7.2	5.9
	MPM	4.9	3.2	2.8	2.2	1.8
MOTOR CURRENT	Amps	15	70	10.5	135	150

LINE PULL AND CABLE CAPACITY

LAYER OF CABLE		1	2	3	4
RATED LINE PULL PER LAYER	Lbs.	3500	2870	2430	2100
	kg	1598	1300	1100	950
CABLE CAPACITY PER LAYER	Ft.	6.9	15.1	24.9	36.4
	M	2.1	4.6	7.6	10