



ZFL-001 ALARM FOLDING LOCK USER MANUAL



NOTE!

120 DECIBELS ALARM


The alarm is loud and has a decibel rating of 120. Please avoid placing the lock next to your ears when the alarm is activated. The extremely loud sound can damage your hearing.



Remove the transparent plastic wrap around the battery before use

INSTALL BATTERY


- 1 Insert the key and rotate clockwise to unlock.
- 2 Loosen the hex screw inside the head of the lock.
- 3 Take out the battery compartment.
- 4 Open the waterproof lid.
- 5 Install the CR2 lithium battery.
- 6 Reassemble the parts.

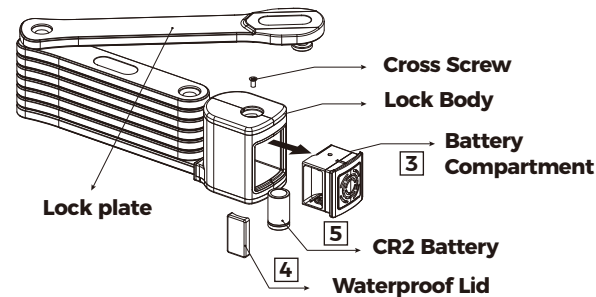

Make sure the waterproof lid is firmly closed to ensure that waterproofing is not affected.


LOCKING WITH ALARM ACTIVATED

1. Slide the lock out of the bracket.
2. Open all the folding plates and wrap around the bike frame in a secure location.
3. Insert the shackle into the lock body.
4. Insert the key into the key barrel and rotate anti-clockwise to lock. Listen for 1 short beep.
5. After 5 seconds, the siren will sound a single long beep to indicate the alarm is activated.
6. If the lock is hit or vibrated, the siren will emit five rapid beeps as a warning.
 - If no further movement is detected within 15 seconds, the alarm will rearm automatically.
 - If movement continues, the siren will burst out a 120dB alarm for 15 seconds.
7. The cycle repeats until no movement is detected.




LOCKING WITH ALARM DEACTIVATED

1. Insert the key into the key barrel and rotate anti-clockwise to lock. Listen for 2 short beeps.
The alarm function is deactivated.

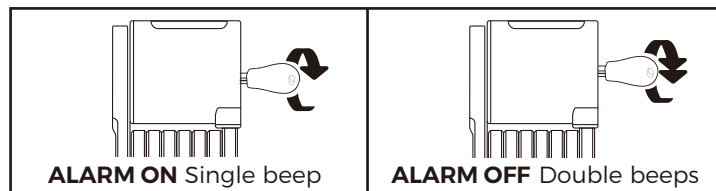

USING THE BRACKET

1. Determine where you want to attach the bracket. [Fig.1]
2. Loosen the strap and position the holder on the frame. [Fig.2]
3. Tighten the strap to secure the bracket to the bike frame. [Fig.3]
4. Screw in the two supplied cross screws into the holes to tighten the position. [Fig.4]
5. Insert the strap fasteners to fix the position.
6. When transporting, insert the lock into the bracket and fasten the secure strap. [Fig.5]

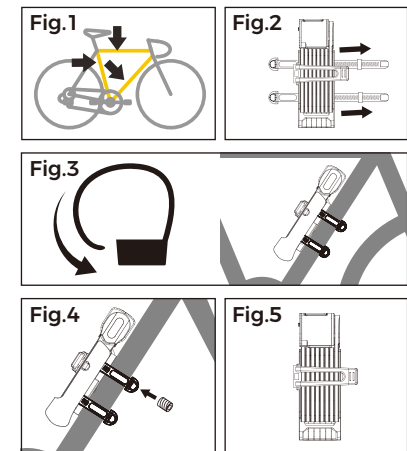

BATTERY LIFE

CR2 Lithium Battery

The typical life span of a CR2 lithium battery is approximately 8-12 months. However, frequent triggering or extreme temperatures could shorten battery life.

KEY REGISTRATION & REPLACEMENT

Key Registration Before First Use:

1. Locate your keycode:
 - For standard models: Find the 2-letter + 6-digit code on the key tag next to the physical key.
 - For tagless models: The keycode is laser-etched on the side of the physical key.
2. Register your key at: www.zoviitech.com.

Replacement Keys:

- Available for order through the Zovii website.
- You must provide your registered keycode.
- Visit: www.zoviitech.com.



TROUBLESHOOTING

1. Alarm not working - Check the battery and ensure your lock is in alarm mode.
2. Lock making a constant sound - Replace the battery.
3. Alarm ringing continuously, broke off, and gave a beep warning sound - Replace the battery.
4. Alarm module is damaged - The alarm module is replaceable. Please contact your local authorized dealers for details.

WARRANTY

Coverage:

Zovii provides a one-year manufacturer's warranty valid from the date of purchase, covering:

- Electronic module failures from non-man-made causes.
- Mechanical part failures from non-man-made causes.

Exclusions:

This warranty does not cover:

- Surface damage or cosmetic imperfections.
- Damage caused by misuse, accidents, or unauthorized modifications.

Claims Process:

For full warranty service or additional details:

1. Visit our warranty details at www.zoviitech.com.
2. Contact your local authorized dealer.

Notes:

For full warranty service or additional details:

- Proof of purchase required for all warranty claims.
- Warranty applies only to original purchaser.

CUSTOMER CARE

Email us at info@zoviitech.com if you have any questions about the lock product.