

Instruction Manual

CE 0082

EN 795:2012 Type B


# FRICTION SAVER

Ref. TU 900 XXX (xxx - length)

CAMBIUM SAVER XPSTU900

## CONSTRUCTION

Branch sling is made of polyester webbing equipped with a larger diameter aluminum ring and small ring.  
The branch sling is manufactured of length from 0.4 m to 20 m.

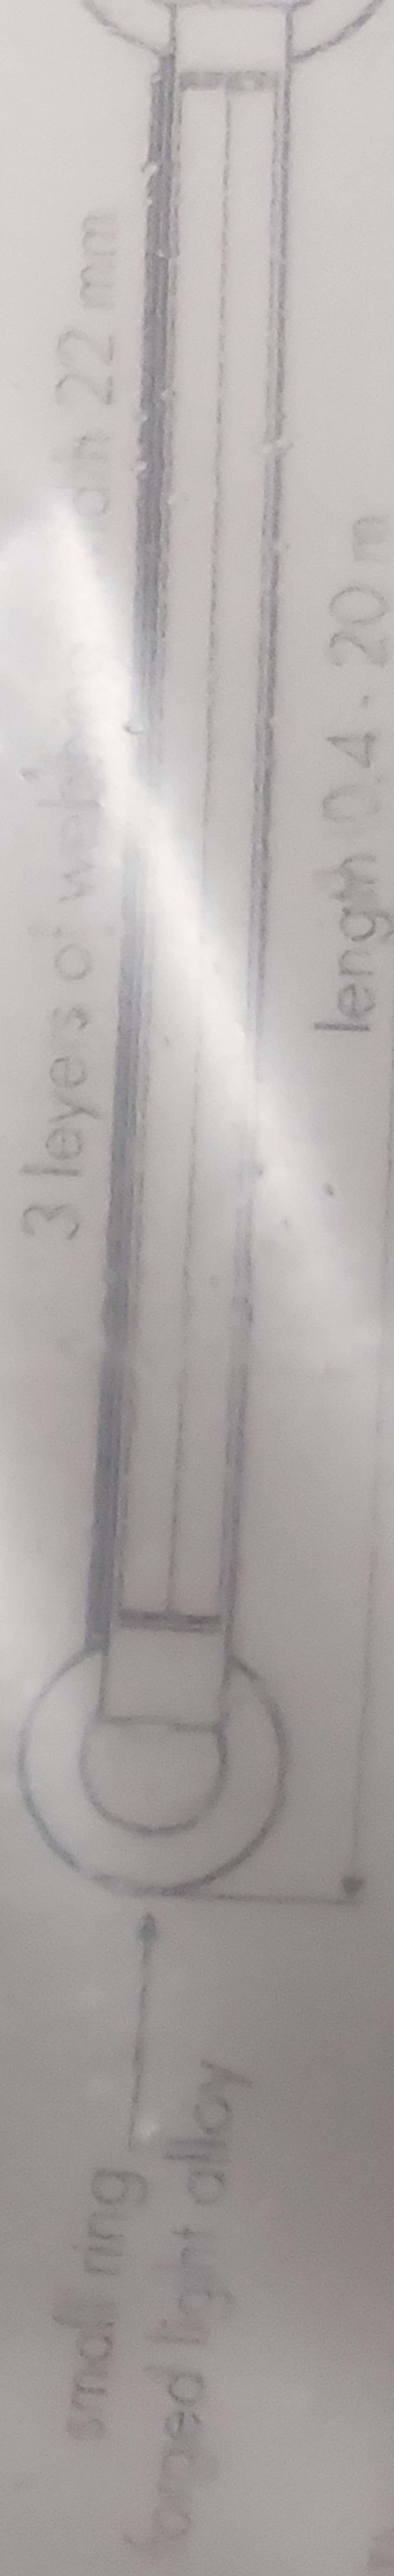

The anchor device should only be used for personal fall protection equipment and not for lifting equipment. It can be used by only one user.

## INSTALLING BRANCH SLING AS CAMBIUM SAVER

The branch sling is a protective webbing sling, used in connection with a climbing line to reduce the friction on the climbing line, select a branch crutch that is clear and open. Once installed, ensure that both ends of the sling are free to move and that they hang freely to the ground.

1. Thread the bag, connected to the climbing line, over the selected branch crutch and bring both ends of the line back down to the ground. Thread the climbing bag through the larger ring of the branch sling.

