

# Combination Key Safe Box Instruction

## To open the key box:

1. Rotate dials to the current combination (factory combination is 0-0-0-0).
2. Pull down the lid.
3. After closing the cover, upset the dials to protect your combination.

## To set your combination:

1. Open the key box, leave dials at current combination (factory combination is 0-0-0-0).
2. Push the RESET button from position A to position B, as shown in Pic 2.
3. Now rotate dials to set your desired combination, as in Pic 1.
4. Push the RESET button back to position A. Now the new combination is set.



Pic 1




Pic 2

RESET button

## Instruction:

1. Open the box inside there will be 5 holes in the back of the box.
2. Hold the box to the wall and Mark position of holes with a pencil.
3. Using a masonry drill to drill the holes into wall.
4. Place plastic expanded plugs into the wall.
5. Place box against wall with screws

After the box is opened, to plug in/out the shackle, pull the button 2 inside the box from right side to left, and loose the button 2 after pulling in/out the shackle, keys can be put in or taken away, shown in Pic 3.

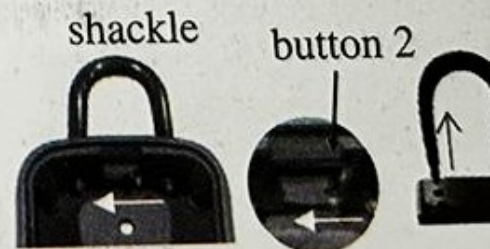

Pic 3

