

DS-K1T341A Series Face Recognition Terminal

DS-K1T341A series face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster with higher accuracy. It also supports multiple authentication modes: face/card/fingerprint authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.



Available Model

- DS-K1T341AM
- DS-K1T341AMF

Features

- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- 4.3-inch touch screen 720p wide-angle dual-lens
- Face anti-spoofing
- Face recognition distance: 0.3 m to 1.5 m
- Deep learning algorithm
- 1500 face capacity, 1,500 card capacity, 1,500 fingerprint capacity (should be supported by device model) and 150,000 event capacity
- Face recognition duration < 0.2 s/User; face recognition accuracy rate $\geq 99\%$
- Capture linkage and captured pictures storage
- Transmits card and user data from or to the client software via TCP/IP protocol and saves the data on the client software
- Imports pictures from the USB flash drive to the device or export pictures, events, from the device to the USB flash drive
- Stand-alone operation
- Manage, search and set device data after logging in the device locally
- Connects to one external card reader via RS-485 protocol
- Connects to secure door control unit via RS-485 protocol to avoid the door opening when the terminal is destroyed
- Connects to external access controller or Wiegand card reader via Wiegand protocol
- Two-way audio with indoor station and master station



- Supports 6 attendance status, including check in, check out, break in, break out, overtime in, overtime out
 - Supports multiple languages: English, Spanish, Arabic, Thai, Indonesian, Russian, and Vietnamese.
 - Configuration via the web client
 - Remotely opens door and starts live view via Hik-Connect
 - Supports ISAPI and EHome 5.0 protocols
- * Biometric recognition products are not 100% applicable to anti-spoofing environments. If you require a higher security level, use multiple authentication modes.*

Specifications

Model	DS-K1T341AM	DS-K1T341AMF	
System	Operation system	Linux	
	Size	4.3-inch	
Screen	Resolution	800 × 480	
	Operation method	Capacitive touch screen	
Camera	Resolution	720p	
	WDR	Support	
	Lens	× 2	
	Video standard	PAL (Default) and NTSC	
Audio	Audio input	Built-in omnidirectional microphone	
	Audio output	Built-in loudspeaker	
	Volume adjustment	Adjust via device or client	
Network	Wired network	10 M/100 M/1000 M self-adaptive	
	Communication protocol	EHome 5.0	
	Network interface	× 1, RJ45	
	RS-485	× 1	
	Wiegand	Wiegand 26 and Wiegand 34	
Interface	Lock output	× 1	
	Exit button	× 1	
	Door contact input	× 1	
	Power interface	× 1	
	TAMPER	× 1	
	USB	× 1, USB2.0	
	Capacity	Card capacity	1500
Face capacity		1500	
Fingerprint capacity		/	1500
Event capacity		150,000	
Card type		Mifare 1	
Authentication	Card reading distance	0 to 3 cm	
	Card reading duration	< 1 s	
	Face recognition duration	< 0.2 s	

Function	Face recognition distance	0.3 to 1.5 m	
	Fingerprint Recognition duration	/	< 1 s
	Face anti-spoofing	Support	
	Live view	Supports live view on the platform, H.264	
	Face recognition	Supports face recognition in low illumination	
	Access control management	Supports multiple authentication methods	
Others	power supply	12 VDC, 2 A	
	Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)	
	Working humidity	0 to 90% (No condensing)	
	Protective level	IP65	

* Exposing the equipment to direct sun light, low ventilation or heat source such as heater or radiator is forbidden (ignorance can cause fire danger).

Dimensions

Figure 1. Dimension with Fingerprint Module


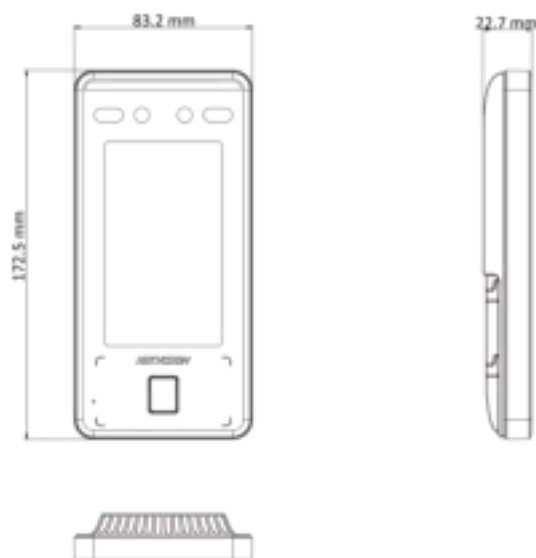


Figure 2. Dimension without Fingerprint Module



Distributed by

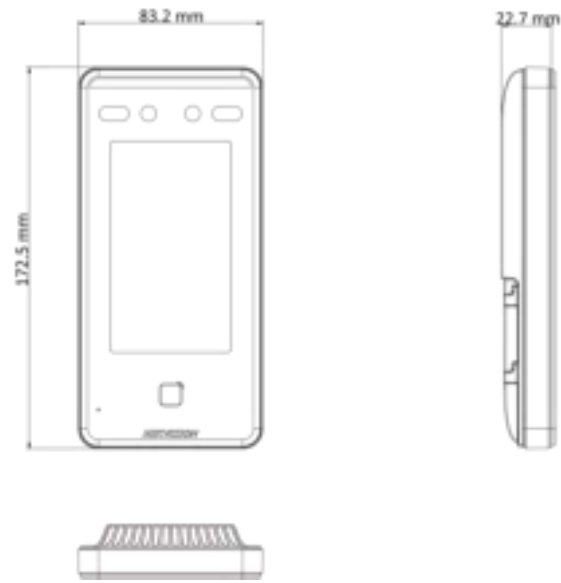

HIKVISION

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.eastbusiness@hikvision.com

Hikvision USA

T +1-909-885-0400
sales.usa@hikvision.com

Hikvision Australia

T +61-2-8599-6255
sales.au@hikvision.com

Hikvision India

T +91-22-26403800
sales@prema@hikvision.com

Hikvision Canada

T +1-866-200-8690
sales.canada@hikvision.com

Hikvision Thailand

T +662-225-9949
sales.thailand@hikvision.com

Hikvision Europe

T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy

T +39-0438-6802
info.it@hikvision.com

Hikvision Brazil

T +55-21-3318-8950
Latam.support@hikvision.com

Hikvision Turkey

T +90-212521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia

T +601-2952-2413
sales.my@hikvision.com

Hikvision UK & Ireland

T +01629-802140
sales.uk@hikvision.com

Hikvision South Africa

Tel: +27 (0) 8331172
sales.africa@hikvision.com

Hikvision France

T +33011-86-330-460
info.fr@hikvision.com

Hikvision Kazakhstan

T +7-727-9730807
nikita.pantlov@hikvision.ru

Hikvision Vietnam

T +84-074270889
sales.vt@hikvision.com

Hikvision UAE

T +971-4-9452090
sales.uae@hikvision.com

Hikvision Singapore

T +65-6584-4718
sg@hikvision.com

Hikvision Spain

T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent

T +99-67-1239-8438
uzb@hikvision.ru

Hikvision Hong Kong

T +852-3151-1761
info.hk@hikvision.com

Hikvision Russia

T +7-495-869-67-99
sales.ru@hikvision.com

Hikvision Korea

T +82-3031-731-8817
sales.korea@hikvision.com

Hikvision Poland

T +46-22-460-01-60
info.pl@hikvision.com

Hikvision Indonesia

T +62-21-2933759
sales.indonesia@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com