HXSJ

Instructions

HD SOUND SPEAKER
Qiock Start Guide

Q3

How to use

1. Plug both the 3.5 AUX audio cable and the MICROUSB power cable into the LIN and DC 5V product jacks respectively.
2. Plug the other end of the 3.5 AUX audio cable into the output port of the audio source, and check if the audio source is muted.
3. Plug the other end of the USB power cable into the USB port of your computer, tablet, charger, etc. with 5V1A and 5V2A output.
4. You can adjust the volume button on the top of the product to the appropriate position according to your needs.

Buttons and functions

3.5mm AUX Input   DC 5V Power

Volume controller
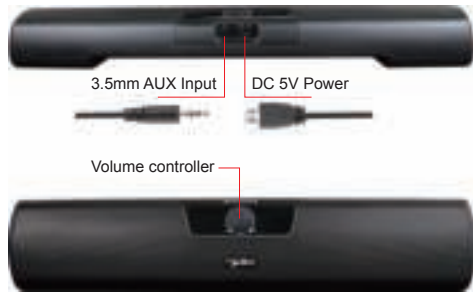
Instructions

Issues	Solutions
Does Not Work	1.Because the product has a wire control board without battery, SO you must use USB charging cable to get power. The above AUX and USB cable should be used at the same time then the machine can work.
One Side No Sound	1.Make sure the 2 ends of the AUX cable are inserted in place. 2.Try to adjust the volume rotation button
Noise After Insert	1.Please use the supplied AUX audio shield cable and make sure both ends are plugged into the input and output holes. 2.Please try to access the USB power supply from the USB port of the same product as the volume output.

Notices

1.If you put the product on your working table, it may move slightly when the volume is at its maximum, so please be careful to protect it from falling.
2. Power supply, do not use the feature phone charger. You can use the smartphone charger. Otherwise, it may cause whistling and noises.

Packing list

Packing list:
1.Q3 Wired Speaker * 1
2.1.5M 3.5 male-to-male audio shielded cable* 1
3.1.5M USB power supply line*1
4.Wall hook*2
5.Wall hook screws*2
6. English User manual*1