


EASY LED UNIVERSAL 2.0

FRESHWATER



SECURE

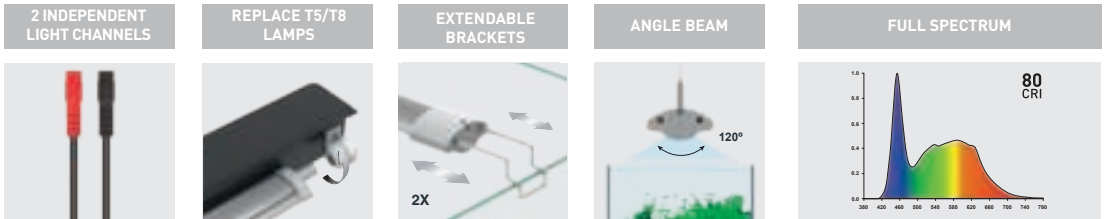

ECONOMIC



ECOLOGIC



LOW
CONSUMPTION

FOR ALL
AQUARIUM
BRANDS

NOT INCLUDED

KIT STAINLESS STEEL CABLE



Compatible with

LUMINUS
SMART LED CONTROLLER

Code: 11649



DIMENSION	AQUARIUM MINIMUM LENGTH*	AQUARIUM MAXIMUM LENGTH*	POWER	COLOUR TEMPERATURE (KELVINS)	T5 LAMPS REPLACEMENT	T8 LAMPS REPLACEMENT	LUMENS (lm)	LUX (lm)	PRODUCT CODE
438mm	45cm	70cm	20W	6800K	24W	15W	2395	8460	12358
549mm	55cm	81cm	28W	6800K	24W	-	3139	8890	12359
590mm	60cm	85cm	28W	6800K	28W	18W	3407	10000	12360
742mm	75cm	100cm	36W	6800K	35W	25W	4465	11700	12361
849mm	85cm	110cm	44W	6800K	39W	-	5209	10900	12362
895mm	90cm	115cm	44W	6800K	45W	30W	5507	10500	12363
1047mm	105cm	130cm	52W	6800K	54W	-	6519	9100	12364
1149mm	115cm	140cm	62W	6800K	54W	-	7096	7360	12365
1200mm	120cm	145cm	62W	6800K	54W	36W	7497	10300	12366
1450mm	145cm	170cm	72W	6800K	80W	-	9121	10200	12367

*Without EASY LED UNIVERSAL end caps

EASY LED UNIVERSAL 2.0

SPARE PARTS

EXTENSION CABLE | 10847



SPLITTER CABLE B/B | 11146



SPLITTER CABLE R/B | 12952



PLASTIC END CAPS | 13649



KIT STAINLESS STEEL CABLE | 10840



EXTENDABLE BRACKETS | 14036




PLASTIC END CAPS (1200/1450mm) | 13650



When using the SPLITTER CABLE, the adaptor must be appropriate.

INPUT = OUTPUT

Example:

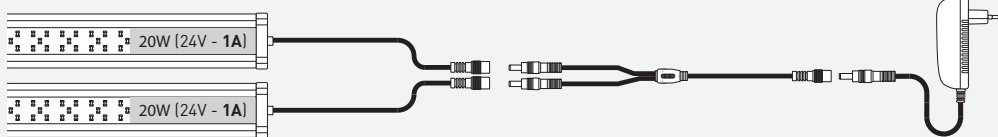

This product is only intended to be used for aquariophily, for the purposes of photosynthesis, and may never be used for other purposes.

Photosynthetic efficiency > 1.2 µmol/J

ADAPTORS

Adaptor 1A	Adaptor 1,5A	Adaptor 2A	Adaptor 2,5A	Adaptor 3,75A	Adaptor 5A
24V	24V	24V	24V	24V	24V
EASY LED UNIVERSAL 438	EASY LED UNIVERSAL 549 EASY LED UNIVERSAL 590	EASY LED UNIVERSAL 742 EASY LED UNIVERSAL 849 EASY LED UNIVERSAL 895	EASY LED UNIVERSAL 1047	EASY LED UNIVERSAL 1149 EASY LED UNIVERSAL 1200 EASY LED UNIVERSAL 1450	If a SPLITTER CABLE is used
10024	10025	10026	10027	11158	11242