

SPECIFICATIONS

Standards: IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3ab 1000Base-T, IEEE 802.3x

Cabling: UTP Cat.3 or up for 10BASE-T; UTP Cat.5 or up 100BASE-TX / 1000Base-T

Power consumption:
5.0 V DC up to 1.0 A

Operating temperature: 0 °C ~ 40 °C

Storage temperature: - 40 °C ~ 70 °C

Operating humidity: 10 % ~ 90 % RH
(non-condensing)

Storage humidity: 5 % ~ 90 % RH
(non-condensing)

Dimensions: 130 mm x 59 mm x 21 mm

Net weight: 80 g



All brands and logos are registered trademarks of their respective owners.

PACKAGE CONTENTS

Gigabit LAN switch
Power adapter
User manual




proud to be a product of

 **gembird**[®]

www.gembird.eu

Gembird Europe BV.
Wittevrouwen 56, 1358CD Almere, The Netherlands

P/N NSW-G8-01

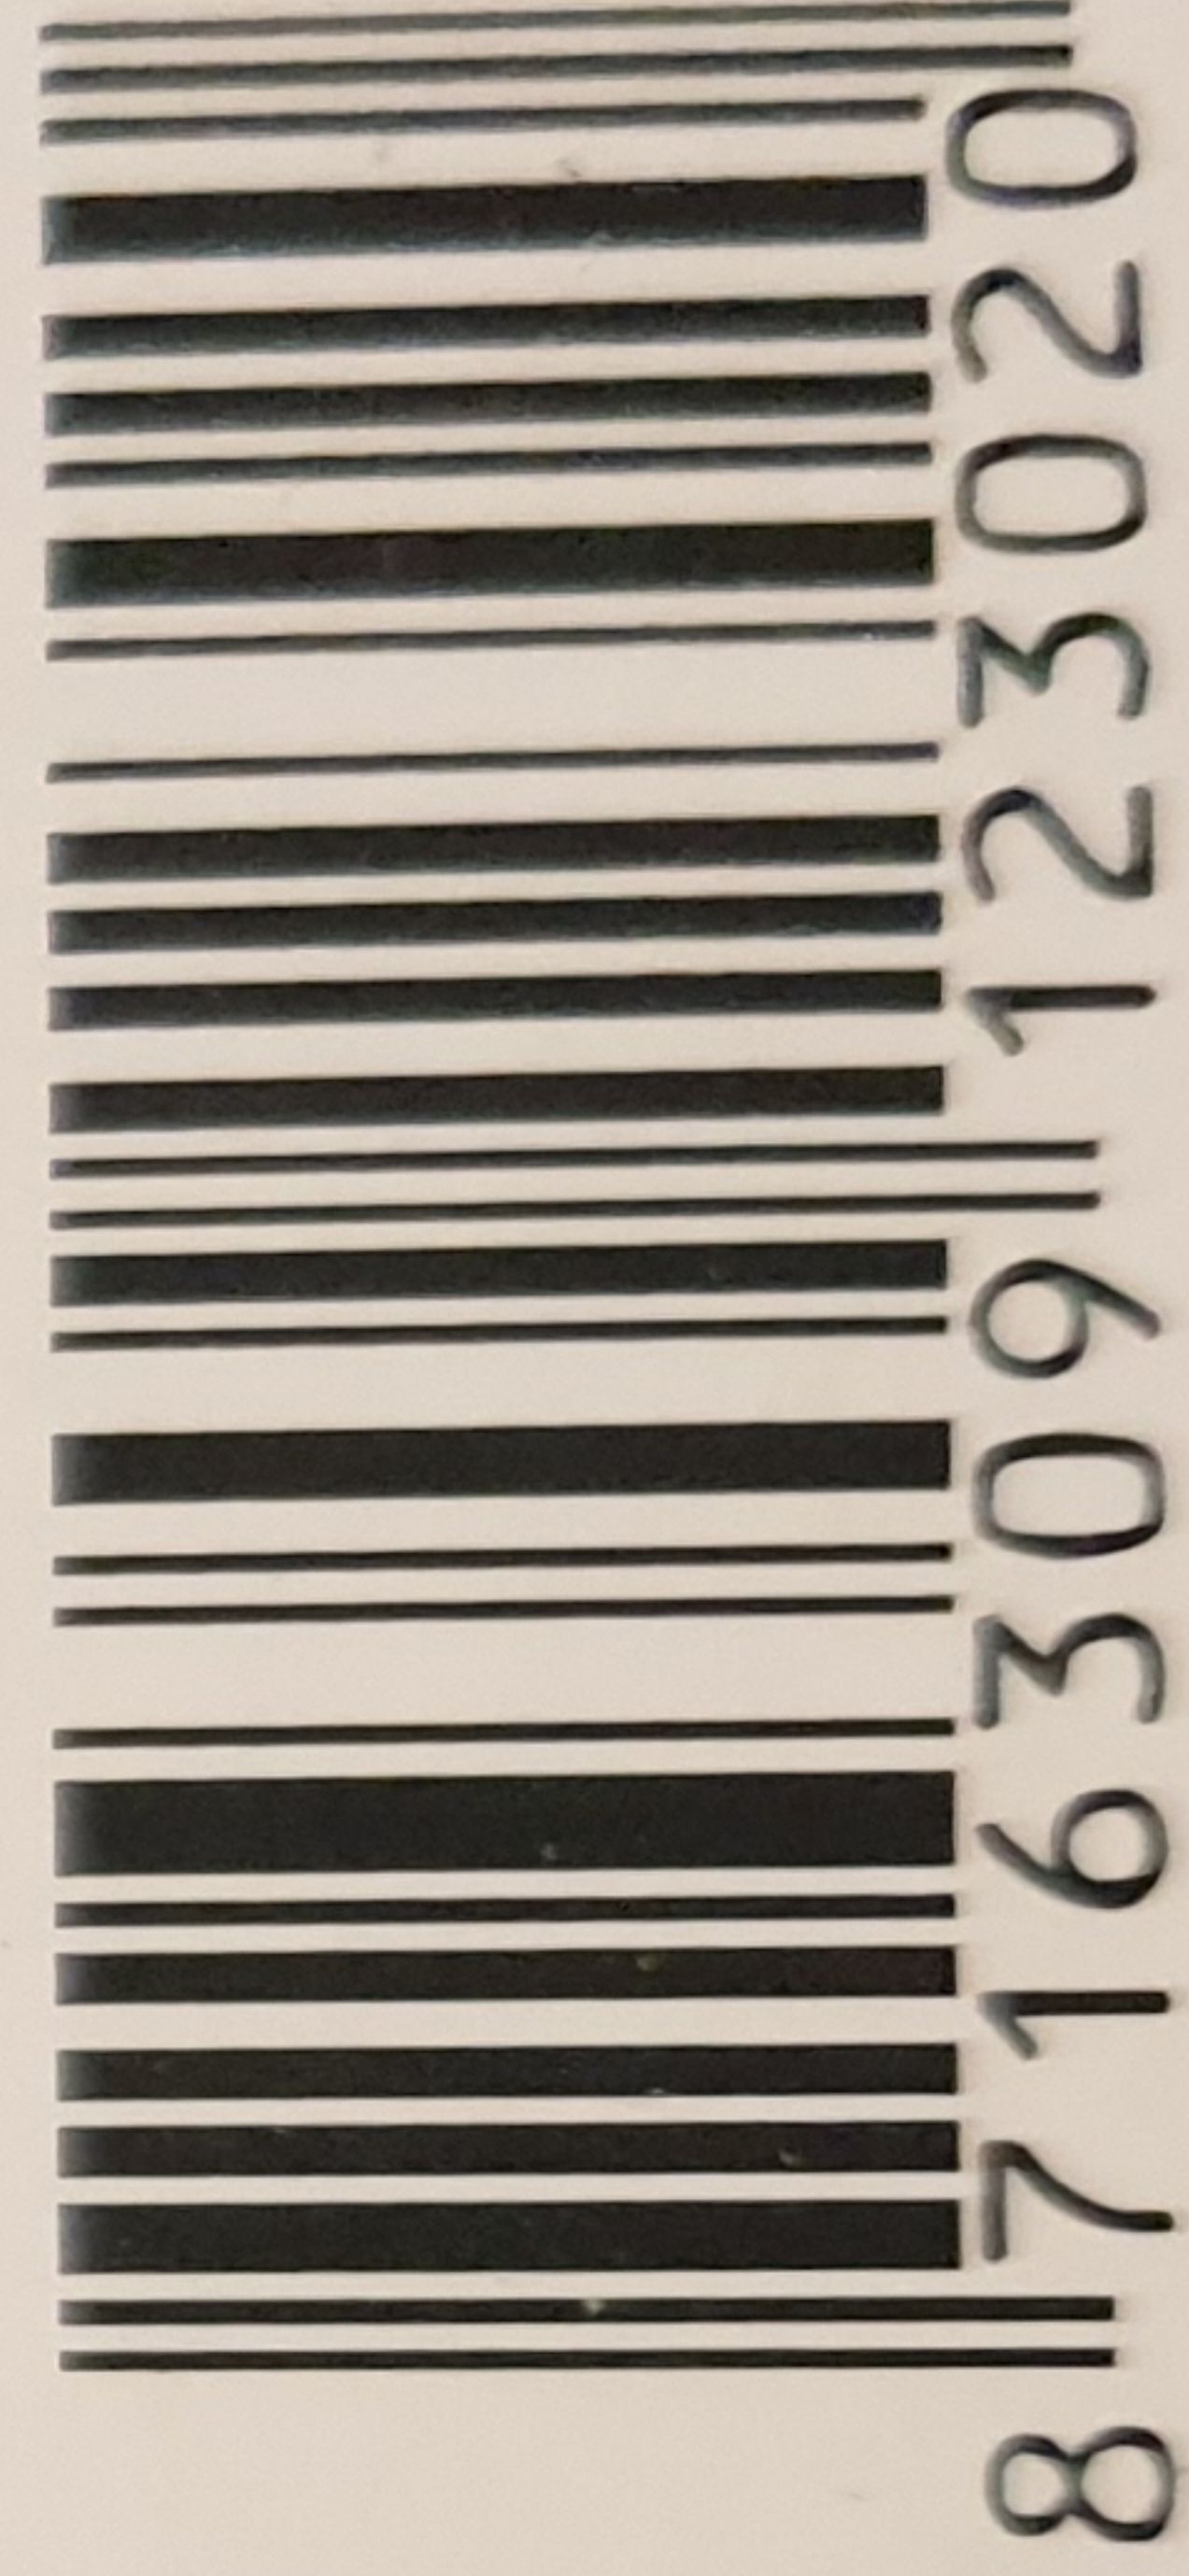

MADE IN CHINA