


## Resuable Cable Ties

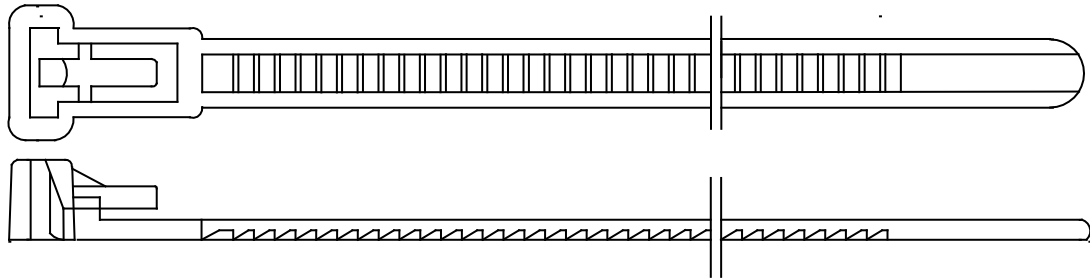

### MATERIAL:

1. Natural: Polyamide 6.6 natural

Material Brand: Dupont Zytel 101F, 101L, Ascend Vydyne 21SPC, 21SPF

2. Black: Polyamide 6.6 natural+ ~1% carbon black

Material Brand: Dupont Zytel 101F, 101L, Ascend Vydyne 21SPC, 21SPF + Dupont Zytel 105BK, Ascend Vydyne 25WSP

Flammability of raw material : UL 94 - V2

Humidity absorption: 2,7%-2,8% (23°C -50% R.H.)

Installation temperature: -10°C ~+85°C.

Working temperature:-40°C ~+85°C.

Max sustaiaable tempeature for short time:+110°C.

Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.

Carbon black addiction gives a better UV resistance (only for Black Caba Ties)

### Listed with:


UL (Underwriters Laboratories) : File E 258930 based newest standard UL62275

RoHS: RoHS Directive (EU) 2016/863 amending Annex II to Directive 2011/65/EU

REACH Compliance

Size	Width mm	Length mm	Min Bundle Diameter mm	Max Bundle Diameter mm	Weight (g) 10% tolearance	Material	Tensile Strength
7.6x150mm	7.6±0.2	150±3	10.00	40.30	1.65	nylon 66	230N(50lb)
7.6x200mm	7.6±0.2	200±3	10.00	55.60	2.26	nylon 66	230N(50lb)
7.6x250mm	7.6±0.2	250±3	10.00	66.70	2.55	nylon 66	230N(50lb)
7.6x300mm	7.6±0.2	300±3	10.00	82.00	3.25	nylon 66	230N(50lb)
7.6x370mm	7.6±0.2	370±3	10.00	104.30	3.80	nylon 66	230N(50lb)


 Schelluinsestraat 70  
4203 NN Gorinchem  
The Netherlands

 +31 (0)184 614 256

 +31 (0)184 614 881

 info@kortpack.nl

 www.kortpack.nl

 Rabobank : 1332.51.632  
Iban number : NL83RABO0133251632

Swift code : RABONL2U

 BTW nummer : NL8235.41.216 B01

 KVK nummer : 54204259

 Leverings- en betalingscondities  
overeenkomstig de algemene  
voorwaarden. Deze zijn kosteloos  
opvraagbaar.