

If you are unable to correct a fault yourself, please contact our technical support directly. Please note that improperly conducted repairs will void your warranty and may cause you additional expenses.

Technical data

Model	QSB-JH-250	QSB-JH-400	QSB-JH-500
Item number	Q2503	Q4003	Q5003
Rated voltage	230 V ~ / 50 Hz	230 V ~ / 50 Hz	230 V ~ / 50 Hz
Rated power	250W	400W	500W
Protection type	IPX8	IPX8	IPX8
Max. supply height	6m	8m	8.5m
Max. flow rate	6000l/h	7000l/h	11000l/h
Max. submersion depth	7m	7m	7m
Max. temperature of liquid	35 °C	35 °C	35 °C
Pressure pipe diameter	1" G1 1/2" G1 1/2"	1" G1 1/2" G1 1/2"	1" G1 1/2" G1 1/2"
Pipe connection			
Cable length	10 m	10 m	10 m
Grain size	5 mm	5 mm	5 mm




Attention!

Risk of damage to the appliance!

The grain size mentioned does not refer to sand or stones but rather to silt, flexible particles such as fluff and similar which the rotor cannot wedge inside the pump.

AQUAKING

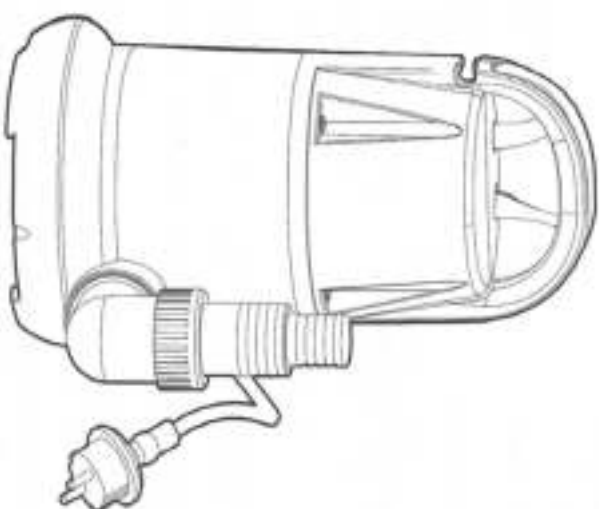

Q2 503
Q4 003
Q5 503