


LED LIGHTING  
Votlage:165-260V 50-60Hz  
IP=20 Ra:80



LED Driver  
LOAD:SF12-24W  
OUTPUT:36-85VDC 280  
AC INPUT  
INPUT:165-265VAC 50  
Ta:-20...45°C Tc:65°C  
CE F M

• Please do not hurt the surface layer and periphery of LED patch when installing punching holes, otherwise the light source may be damaged!!!  
• At the same time, check whether all line terminal connections are in good contact Good(because there are connection lines in the process of logistics and transportation will not be damaged, otherwise the lamp body will not

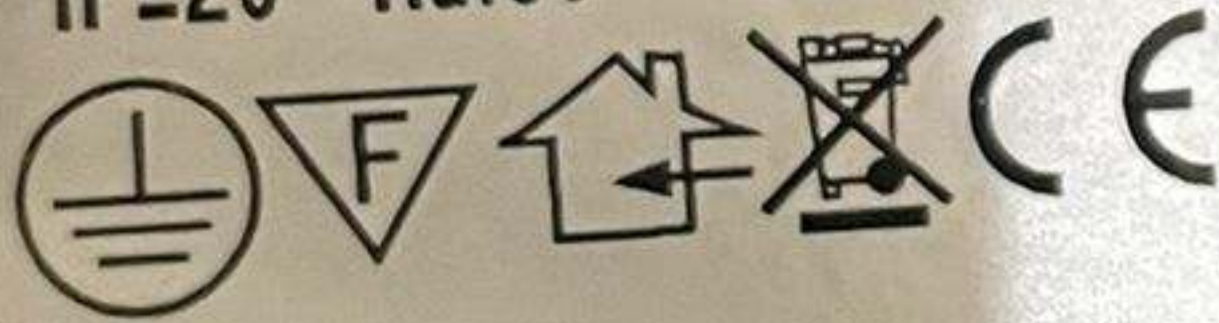