

Baby Monitor Kit

QUICK START GUIDE

V1.1.0

- Please read this instruction manual carefully before using, and keep it for future reference.
- Functions and features are subject to change without further notice.


Safety Instructions and Warnings




Hazard Warnings: Potential Risk of Strangulation

- Please be aware that children are at risk of strangulation and suffocation accidents caused by rope entanglement.
- Please keep power cords away from children; maintain a distance of at least 3.5 feet (1m).
- Do not allow children to use this product as a toy without supervision.
- Please do not leave the camera in the baby cot or safety fence.
- This baby monitor kit is a monitoring aid and cannot replace the functions and responsibilities of an adult supervision.
- Do not leave your infant unattended or alone at home. Infants need the constant care and attention of an adult.
- Do not use this product in an environment that could potentially leak flammable gas, or expose the product to rain or humid conditions.

1. Meet the camera

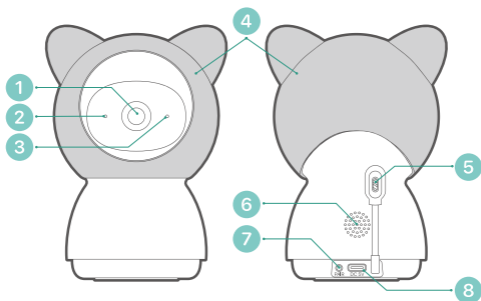

- | | |
|---------------------------|--------------------------|
| 1 Camera Lens | 5 Thermometer/Hygrometer |
| 2 Status LED indicator | 6 Speaker |
| 3 Microphone | 7 Monitor pairing button |
| 4 Rubber Case (removable) | 8 Power input (Type C) |

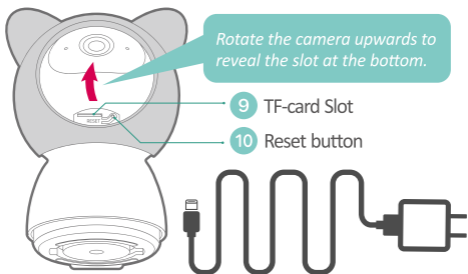


Note:

- The camera needs to be plugged in to a power source before it can be used.
- Please use the original AC adapter and power cord (3M) to power on the camera.



2. Meet the monitor



- | | |
|--------------------------|-------------------------|
| 1 Microphone | 9 Return |
| 2 LED charging indicator | 10 On/off witch |
| 3 LED status indicator | 11 Antenna |
| 4 Zoom in/out | 12 TF-card slot |
| 5 Menu | 13 Speaker |
| 6 Directional keys | 14 Reset key |
| 7 OK | 15 Type C charging port |
| 8 Intercom | 16 Foldable stand |

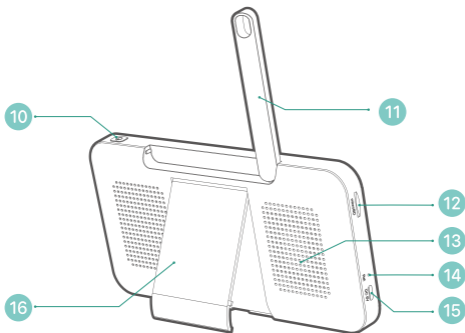

3. Charge Your Monitor

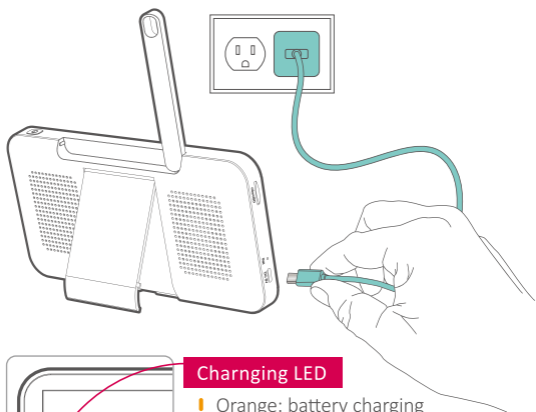

Charging LED

- Orange: battery charging
- Green: fully charged

Status LED

- Orange: monitor displaying
- Off: monitor is powered off

Precautions:

1. The monitor comes with a built-in battery that can last up to 6 hours of continuous use after a full charge. When the battery is low, it will pop-up low power alert.
2. Please use the original AC adapter and power cord(1M) for battery recharge. It takes about 5 hours to fully charge the monitor.
3. Do not use this product on a sloping or unstable surface, keep it away from heat sources to avoid possible damage, and do not place it near or on any electrical appliances.
4. Do not allow children to use this product as a toy without supervision.

4. App Download

Search 'CloudEdge' in the App stores or scan below QR codes to download the App.



iOS




Android

Register an user account and login in. And you will be able to add the camera into your APP account.

5. Set up Wi-Fi for the camera


The camera can be paired with the monitor through its private AP network, with up to 150 meters wireless intercom range. You can also add the camera into your APP account, setting up Wi-Fi so as to view & control your camera remotely through mobile devices.


Steps to set up camera in your App:



1. Plug in to supply power to the camera. Press & hold reset button for 5 seconds till you hear the tone prompted.


2. Confirm the LED indicator blinks red. Now you have 2 minutes to set up your camera.





3. Complete the network config process following the prompted in-app instructions.

4. Adding camera completes, and the indicator light turns to solid blue.



Note:

- Please operate the process near your Wi-Fi router.
- Make sure your phone is connecting to a 2.4GHz Wi-Fi.
- Make sure the camera is turned on, and its indicator LED is flashing red. If not, press and hold RESET for 5 seconds
- Ensure the Wi-Fi signal is good, and the Wi-Fi password is correct.

LED STATUS	INDICATION
● Solid red	Device is abnormal.
● Flash red (once/sec)	Ready for Wi-Fi configuration.
● Flash red (twice/sec)	Connecting to Wi-Fi
● Solid blue	Device is online
● Flash blue (twice/sec)	Firmware upgrading


6. Pair with Monitor

The camera is pre-paired with its monitor to work as a system. The transmission range is limited by distance. Make sure the distance between them is within 150m (500 ft).



Disconnect the camera to the monitor:



1. Click 'MENU' → select '⚙️' → click 'OK' → Click , and enter into **camera management**.



2. Long press **OK** button on the monitor to release the bond.

Reconnect the camera to the monitor:

1. Click 'MENU' → select '⚙️' → click 'OK' → Click , and enter into **camera management**.




2. Long press **PAIR** button on the camera till you hear a prompt tone.
3. Click the **OK** button on the monitor to start pairing.

7. Use your baby monitor kit

Rotate the camera

When the camera is powered on, press direction buttons on the monitor, and you can rotate the camera horizontally or vertically, for a better view angle.

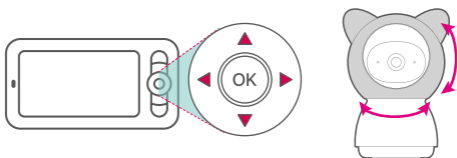

Adjust speaker volume

1. Click 'MENU' button to display the icon dock.



2. Adjust speaker volume with up & down button.

Display brightness

1. Click 'MENU' button to display the icon dock.



2. Adjust brightness with up & down button.

Photo & video

Insert a Micro-SD memory card (Max 128GB) to your monitor, and you will be able to record photos and video clips.



Take photo Video shot Playback

Play music



Select music

Play mode

Volume

Play music

Turn on/off camera indicator

1. Click 'MENU' button to display the icon dock.



2. Switch on/off the camera indicator light with the left/right button.

Settings



Camera:

- To pair or unpair a camera.



Feeding Reminder:

- Make feeding schedules and get reminder alarms.



Temperature & humidity:

- Detect temperature and humidity.



Smart Care:

- Smart functions including Motion Detection, Noise detection and Cry detection.



Sleep Mode :

- Customize screen timeout settings.



Date & Time :

- Set system date and time.



Camera Light :

- To turn on/off camera indicator light.



SD Card :

- Check the memory card status.



Wallpaper :

- Change wallpaper here. You can customize your wallpaper with your photos in the memory card.



Language:

- Select operating language for the monitor.



Reset:

- To restore factory defaults.



Device information:

- Check camera and monitor information here.



Safety Protection:

- 1 You can choose to cut off camera's Wi-Fi, and block the remote view access from the APP to your camera.
- 2 All remote access history will be recorded here.

7. FAQ

Q1: The monitor cannot be previewed properly?

A1: Check whether the monitor has connected to the camera. If not, pair the camera and the monitor firstly.

Q2: What if the monitor screen is stuck and it doesn't work while pressing any buttons?

A2: Press the reset button of your monitor with the pin, and then long press the power button of your monitor to restart it.

Q3: Why the it cannot detect my SD card?

A3: Make sure the Micro SD card is properly installed and try formatting the SD card in FAT32 format before using.

Q4: Why I can't get the notifications with my cell phone App when I connect the camera to the monitor?

A4: To be able to receive visitor notifications properly on your smartphone, it is important to allow all notifications and permissions. You can check this from your phone settings regarding app permissions within the CloudEdge app.

Q5: Why the monitor lost connection with the camera after the camera is connected to the CloudEdge App?

A5: The monitor has a 2 minute interruption time when the camera is reset, and it will automatically resume after 2 minutes. If it doesn't recover, try to pair the monitor and camera again.