

0,14 - 4 mm<sup>2</sup> f  
0,2 - 4 mm<sup>2</sup> r

0,2 ... 4 mm<sup>2</sup>

building wire  
k. signs or

rating  
g material

2 solid / stranded


Ø  
300 V

4 B2, US 9,466,895 B2,  
0 B2, US 9,124,034 B2,  
4 B2, US 9,825,402 B2,  
0 B2, US 9,525,217 B2

Instructions  
Instrucciones de instalación  
Instructions d'installation




CE

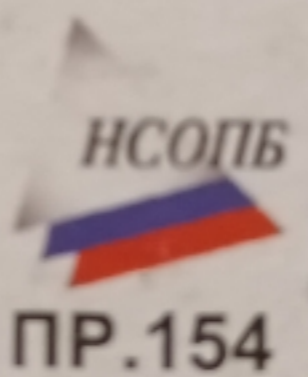

RoHS Compliant

EAC



WAGO



916 - www.wago.com - WAGO Kontakttechnik GmbH & Co. KG/Hansastraße 27/D 32423 Minden  
UK Importer: WAGO Limited, Swift Valley Ind Est, Rugby, CV21 1SG