


## Self-adhesive Cable Clip

Tolerance unspecified  
 mm (inch)  
 X.XXX ±0.1 (0.004)  
 X.XX ±0.25 (0.010)  
 X.X ±0.5 (0.02)  
 X. ±1.0 (0.04)  
 ANGULAR ± 2°

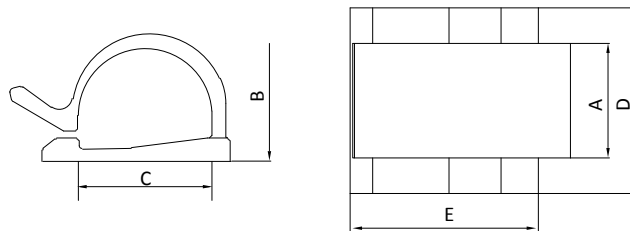

3.2  


A	B	C	D	E	Max Dia of Cable
9.5	7.8	6.0	18.5	18.5	5mm
12.0	11.5	11.9	26.0	26.0	8mm
15.4	17.1	18.1	25.0	25.0	16mm

**MATERIAL:**

- 1. Natural: Polyamide 6.6 natural+Adhesive Tape
  - 2. Black: Polyamide 6.6 natural+ ~1% carbon black+Adhesive Tape
- Flammability of raw material : UL 94 - V2  
 Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)  
 Installation temperature: -10° C ÷ +50° C  
 Working temperature: -30° C ÷ +85° C  
 Max sustainable temperature for short time: +85°C  
 Good resistance to bases, oils, greases, oil derivatives, chloride solvents. Limited resistance to acids. Not resistant to phenols.  
 Carbon black addition gives a better UV resistance

\*\*It is recommended that adhesive mounts to be stuck 2 hours prior to loading. Adhesive tape is the best choice for most adhesive mount applications, including powder coated surfaces.