



Power over Ethernet (PoE+) Splitter

English

Power over Ethernet (PoE+) Splitter IEEE802.3at, 5, 7.5, 9 or 12 V DC output current

- Can be used to connect non-PoE IEEE 802.3af/t-compliant devices to a PoE injector or PoE switch
- Output current, selectable: 5, 7.5, 9 or 12 V DC
- Compact metal case

Deutsch

PoE+ Splitter IEEE802.3at mit 5 / 7,5 / 9 / 12 V DC Ausgangsspannung

- Zum Anschluss von nicht-PoE-kompatiblen Geräten an einen PoE-Switch oder PoE-Injektor
- Wählbare Ausgangsspannung: 5, 7,5, 9 oder 12 V DC
- Kompaktes Metallgehäuse

Français

Diffuseur PoE+

- IEEE802.3at, tension de sortie 5, 7,5, 9 ou 12 Vcc
- Permet de connecter des équipements non-PoE compatibles IEEE 802.3af/t à un injecteur ou un commutateur PoE
- Tension de sortie réglable: 5, 7,5, 9 ou 12 Vcc
- Coffret métallique compact

Italiano

Splitter PoE+

- IEEE802.3at, corrente in uscita 5, 7.5, 9 o 12 V DC
- Può essere utilizzato per collegare periferiche conformi PoE IEEE 802.3af/t ad un iniettore PoE o ad uno switch PoE
- Corrente in uscita, selezionabile: 5/7,5/9 o 12 V DC
- Involucro compatto in metallo

Esp

Splitter PoE+

- IEEE802.3at, 5, 7.5, 9 ó 12 V DC de salida
- Puede ser utilizado para conectar dispositivos que no cumplen con los estándares IEEE 802.3af y IEEE 802.3at a switches o inyectores PoE
- Voltajes de salida, seleccionables: 5, 7.5, 9 ó 12 V CD
- Gabinete compacto de metal

Polski

Rozdzielacz PoE+

- IEEE 802.3at, 5, 7.5, 9 oraz 12 V DV napięcia wyjściowego
- Może być wykorzystany do podłączenia urządzenia nie będącego w standardzie IEEE 802.3af/t, do adaptera lub przełącznika PoE
- Napięcia wyjściowe: 5/7,5/9 lub 12 V DC
- Kompaktowa metalowa obudowa

Specifications

Standards

- IEEE 802.3af (Power over Ethernet)
- IEEE 802.3at (High-Power PoE+ Power over Ethernet)
- IEEE 802.3 (10Base-T Ethernet)
- IEEE 802.3u (100Base-TX Fast Ethernet)

General

- Media support:
 - 10Base-T Cat3, 4, 5 UTP/STP RJ45
 - 100Base-TX Cat5 UTP/STP RJ45

- Ports:
 - 1 RJ45 10/100 Mbps input port for 48 V IEEE 802.3af-compliant signal
 - 1 RJ45 10/100 Mbps output port
 - 1 power output port
- Certifications: FCC Class A, CE

Environmental


- Metal housing
- Dimensions: 102 (L) x 74 (W) x 22 (H) mm (4.0 x 2.9 x 0.9 in.)
- Weight: 0.24 kg (0.5 lbs.)

- Operating temperature: 0 – 60°C (32 – 140°F)
- Operating humidity: 10 – 90% RH, non-condensing
- Storage temperature: -20 – 90°C (-4 – 194°F)

Package Contents

- PoE+ Splitter
- Power output cable
- User manual

Made in Taiwan
Rev 5.02
560443

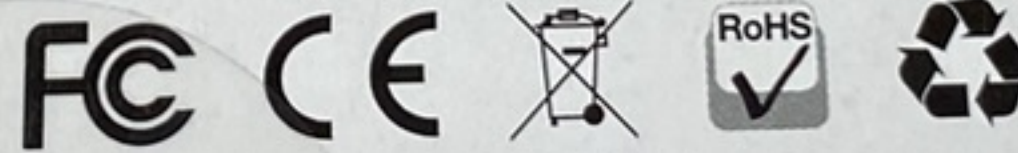

Intellinet Network Solutions* offers a complete line of active and passive networking products. Ask your local computer dealer for more information or visit us online at

intellinet-network.com

© IC Intracom. All rights reserved. All trademarks and trade names are those of their respective owners.