


launched the new  
 n - The Anti-leak  
 system achieve an  
 will significantly  
 liquid cooling  
 elastic pressure-  
 ternal pressure  
 he bag will be  
 system's internal  
 d pressure is  
 oided.

eatures low  
 er advantag-  
 't be ignored.  
 s tempera-  
 Sometimes  
 which will  
 When the  
 levels, a

ool.com

om

Socket Compatibility	intel LGA2066/2011-v3/2011/1700/1200/ 1151/1150/1155 AMD sTRX4/sTR4/AM5/AM4
Net Weight	1607 g
Radiator Dimensions	402×120×27 mm
Radiator Material	Aluminum
Tube length	410 mm
Pump Dimensions	86×74×57 mm
Pump Speed	3100 RPM±10%
Pump Noise	19 dB(A)
Pump Connector	3-pin
Pump Rated Voltage	12 VDC
Pump Rated Current	0.47 A
Pump Power Consumption	5.64 W
Fan Dimensions	120×120×25 mm
Fan Speed	500~2250 RPM±10%
Fan Airflow	85.85 CFM
Fan Air Pressure	3.27 mmAq
Fan Noise	≤32.9 dB(A)
Fan Connector	4-pin PWM
Bearing Type	Fluid Dynamic Bearing
Fan Rated Voltage	12 VDC
Fan Rated Current	0.29 A
Fan Power Consumption	3.48 W
LED Type	Addressable RGB LED
LED Connector	3-pin(+5V-D-G)
LED Rated Voltage	5 VDC
LED Power Consumption	2.2 W(PUMP)/5.4 W(FAN×3)

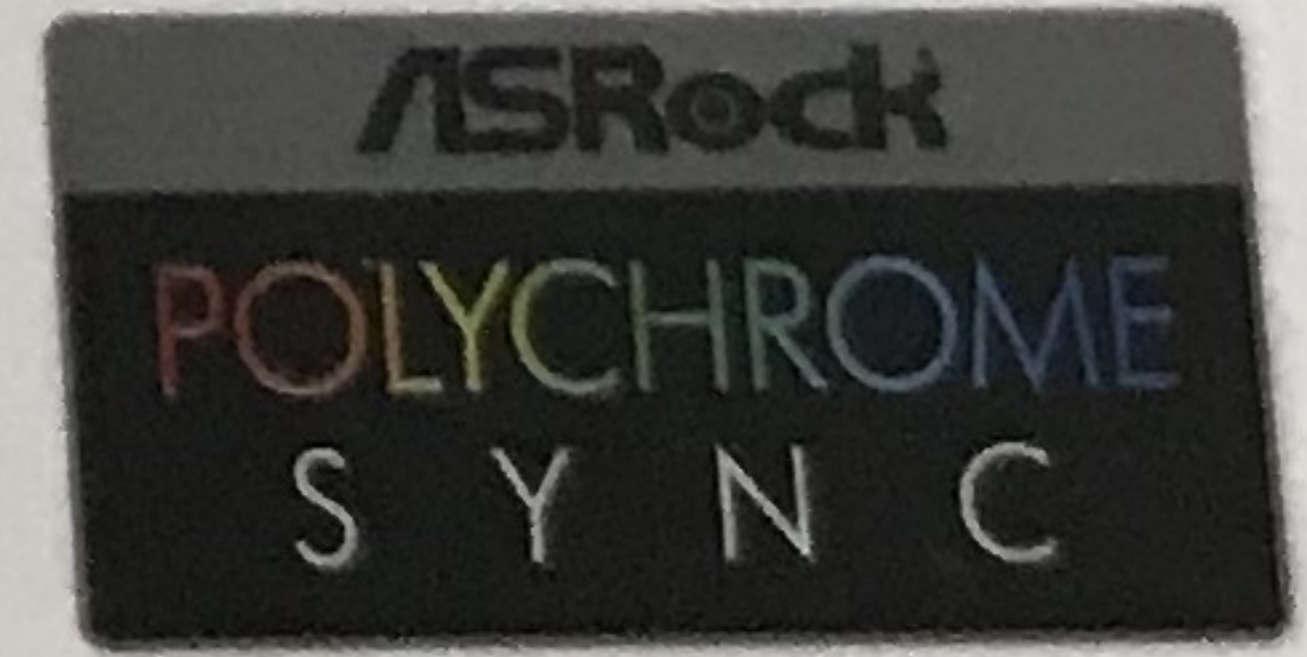

10000130200AH224100374

Warranty void if removed

P/N:R-LS720-WHAMNT-G-1

6 933412 727644

MADE IN CHINA

