


Product Datasheet

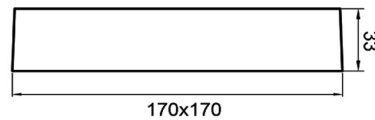

Products Family : Led Lighting Fixture
Products Name : LED Panel Light

Datasheet is valid for following Model numbers

Product Code	CCT	Body Color
BP04-61200	3000K	White
BP04-61210	4000K	White
BP04-61230	6500K	White

Manufacturer:
Demgrup international lighting limited
unit d 16/f,one capital place,18 luard road
wan chai, Hong Kong
www.demgrup.com.tr

Importer / Company:
Braytron S.R.L
Bulevardul iuliu maniu,nr.616, corp B
etaj 1 sector 6,061129 bucuresti, Romania
info@braytron.com www.braytron.com

Test condition:light for 30 mins under nominal voltage input and 25°C±1°working environment

General Characteristics

- Family : Led Lighting Fixture
- Sub Family : LED Panel Light
- Mounting Type : Surface Mounting
- Lamp Shape : Non-Directional
- Dimmable : Not-Dimmable
- Light Source : LED
- Warranty : 2 years
- Class : Class II
- IP : IP40

Lamp Characteristics

- Wattage : 12 w
- Color Temperatue : 3000K/4000K/6500K
- Luminous Flux(whole Product) : 1120 lm
- Luminous Flux(LED System) : 1120 lm
- Color Rendering Index(CRI) : > 80
- Energy Efficiency Level : F
- Beam Angle : 120 Degree(s)
- Chromaticity(SDCM) : < 6

Electrical Characteristics


- Lifetime(L70B50) : 20000 h
- Input Voltage : 220-240V
- Frequency : 50-60 Hz
- Power Factor : > 0.5
- Starting Time : < 0.5 s
- Lumen Maintenance Factor : > 0.899
- Number of Switch Cycles : > 15000
- Material : Plastic
- Working Temperature : -20°C~+45°C
- Storage Temperature : -20°C~+60°C
- Environment humidity(working) : 10%~65%

Test condition:light for 30 mins under nominal voltage input and 25°C±1°working environment

Lamp Dimensions & Weight

- Diameter(mm) :
- Length(mm) : 170
- Width(mm) : 170
- Height(mm) : 33
- Cutout(mm) :
- Weight(gr) : 273

Technical Drawing(s)

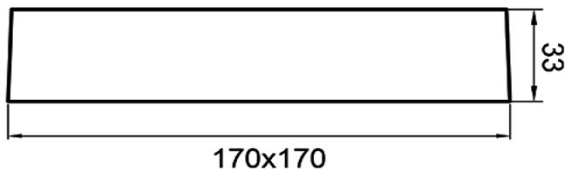

Reliability requirements and Test Conditions

- **Lumen maintenance**
Lumen maintenance is not lower than 89.9% after lighting for 2.5h on and 0.5h off for one cycle.
Total 1200 cycle and 3600h including 3000h on and 600h off.
- **Working life (L70B50)**
Under nominal voltage input, working life is forced not lower than 20000 h at 25°C±1°C

- **Remarks:**


Declared values above may vary ±5



Luminare is intendet to use in outdoor aplications

Test condition: light for 30 mins under nominal voltage input and 25°C±1° working environment

Optical and electrical test parameter:

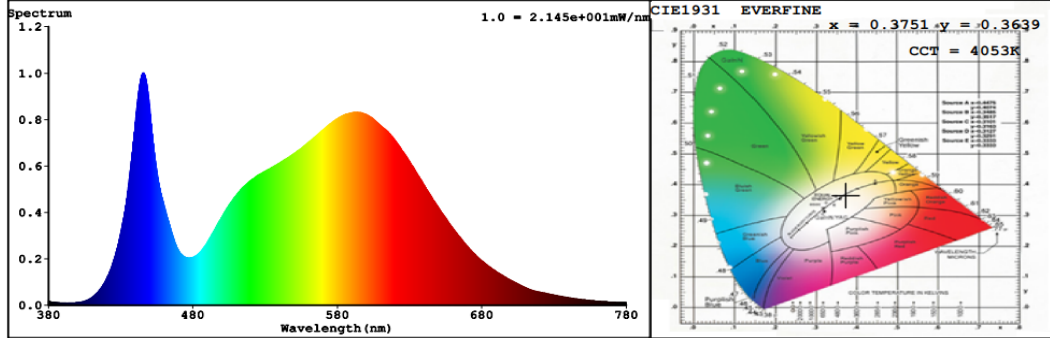

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.3751$ $y = 0.3639$ / $u' = 0.2268$ $v' = 0.4950$ ($duv = -4.58e-03$)

CCT= 4053K Prcp WL: Ld=582.0nm Purity=21.8%

Peak WL: Lp=446nm FWHM: =22.1nm Ratio:R=18.3% G=78.3% B=3.4%

Render Index: Ra = 82.2

EEL: 0.14314 A+

R1 =81 R2 =87 R3 =92 R4 =82 R5 =82 R6 =83 R7 =85

R8 =65 R9 =9 R10=70 R11=82 R12=68 R13=82 R14=95 R15=76

LEVEL:OUT WHITE:ANSI_4000K

Photometric & Radiometric Parameters

Flux = 1012.6 lm Eff. : 91.14 lm/W Fe = 3.1587 W

Electrical parameters

V = 230.64 V I = 0.08615 A P = 11.11 W PF = 0.5592 F=50.00 Hz

Darkroom Test report

