


3.2.6 TEST RESULTS

EUT :	PATCH CABLE	Model Name :	SP-PC5U001
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2017-09-25
Test Mode :	Running	Polarization :	Horizontal
Test Power :	DC5V		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	37.6798	26.84	-14.19	12.65	40.00	-27.35			peak
2	123.6985	27.07	-14.06	13.01	40.00	-26.99			peak
3	225.3080	27.33	-17.29	10.04	40.00	-29.96			peak
4	338.4001	26.10	-13.12	12.98	47.00	-34.02			peak
5	629.4772	26.84	-9.04	17.80	47.00	-29.20			peak
6*	932.2715	26.56	-3.15	23.41	47.00	-23.59			peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

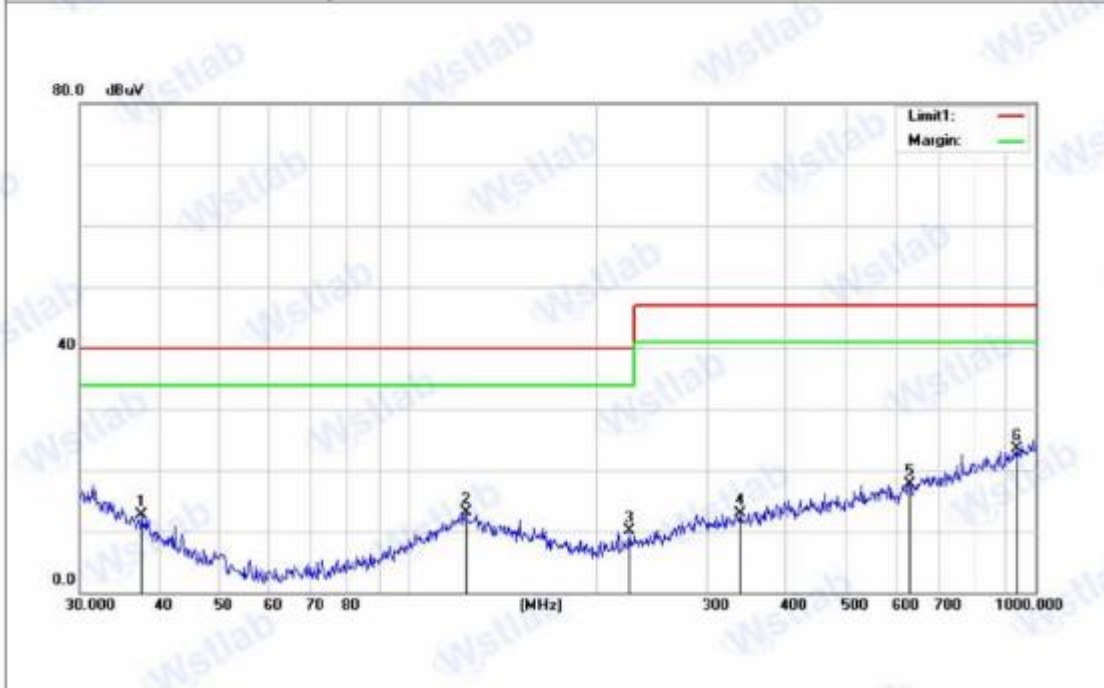

EUT :	PATCH CABLE	Model Name :	SP-PC5U001
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2017-09-25
Test Mode :	Running	Polarization :	Vertical
Test Power :	DC5V		

No. ^o	Frequency ^o (MHz)	Reading ^o (dBuV)	Correct ^o Factor(dB)	Result ^o (dBuV)	Limit ^o (dBuV)	Margin ^o (dB)	Height ^o (cm)	Degree ^o (deg.)	Remark ^o
1 ^o	33.0950 ^o	25.05 ^o	-11.10 ^o	13.95 ^o	40.00 ^o	-26.05 ^o			peak ^o
2 ^o	125.0066 ^o	24.68 ^o	-14.14 ^o	10.54 ^o	40.00 ^o	-29.46 ^o			peak ^o
3 ^o	289.0021 ^o	25.29 ^o	-13.42 ^o	11.87 ^o	47.00 ^o	-35.13 ^o			peak ^o
4 ^o	396.2415 ^o	27.23 ^o	-12.33 ^o	14.90 ^o	47.00 ^o	-32.10 ^o			peak ^o
5 ^o	636.1340 ^o	26.53 ^o	-8.86 ^o	17.67 ^o	47.00 ^o	-29.33 ^o			peak ^o
6 ^{*o}	916.0687 ^o	24.70 ^o	-3.57 ^o	21.13 ^o	47.00 ^o	-25.87 ^o			peak ^o

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

