

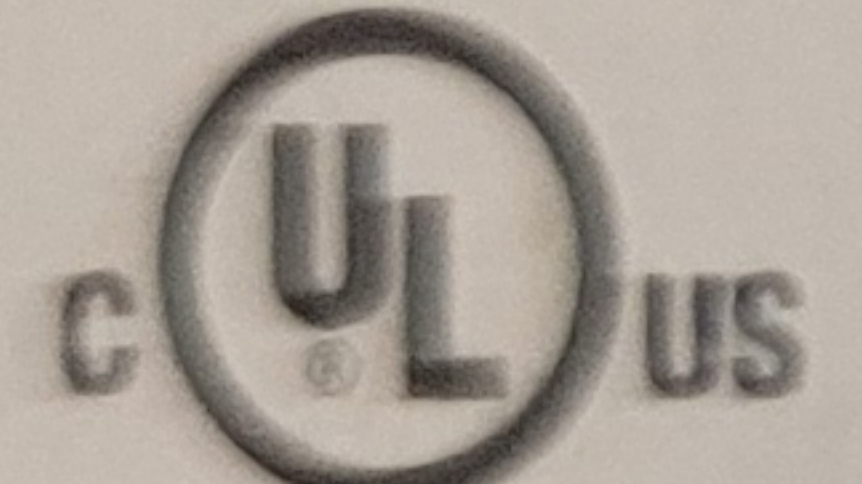

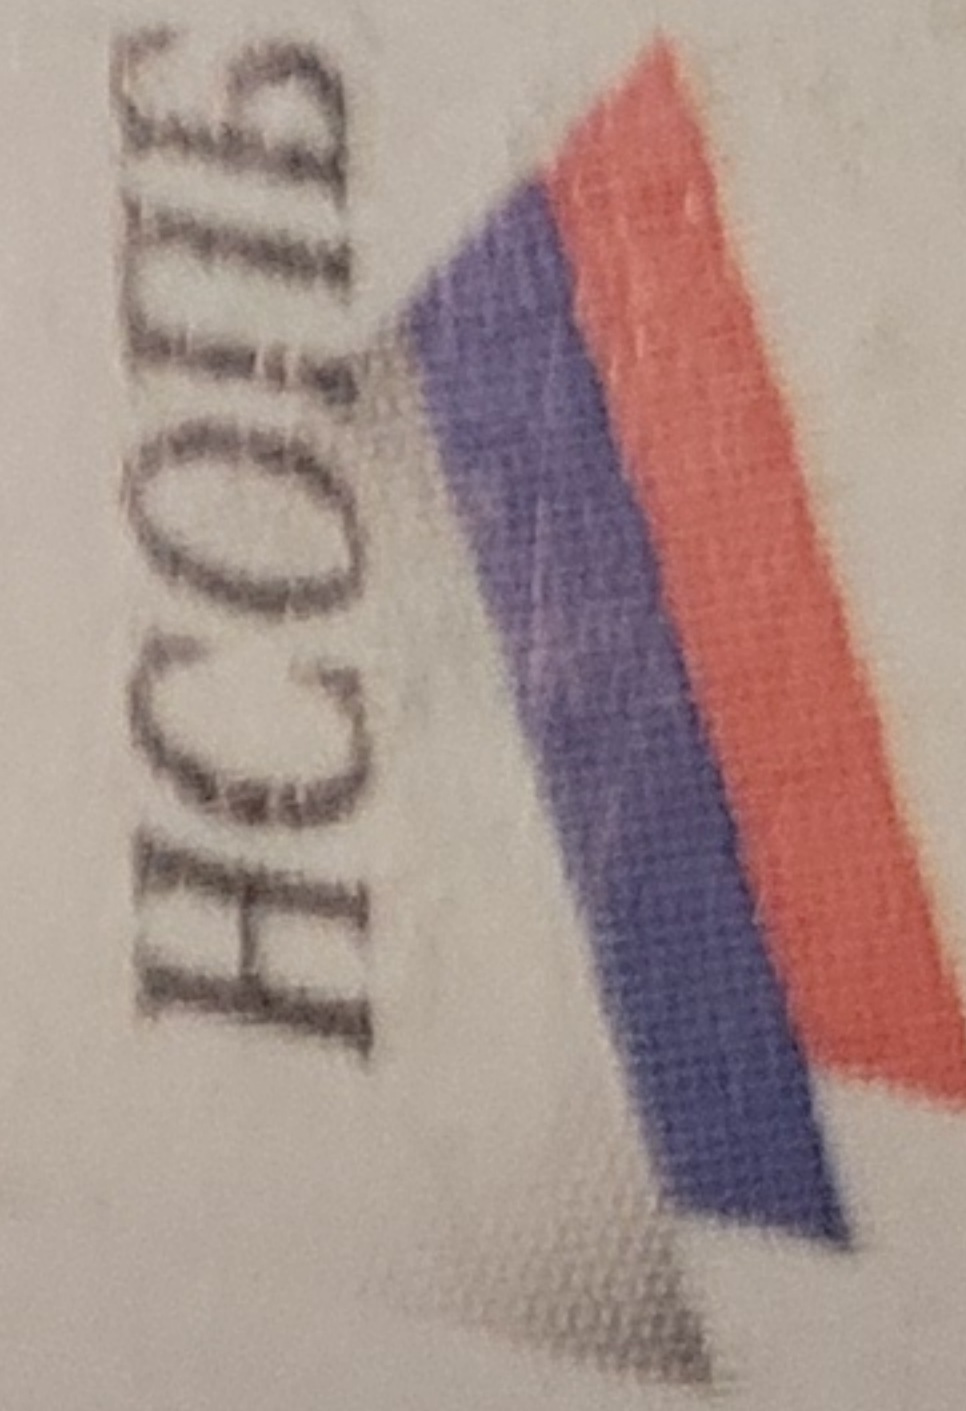
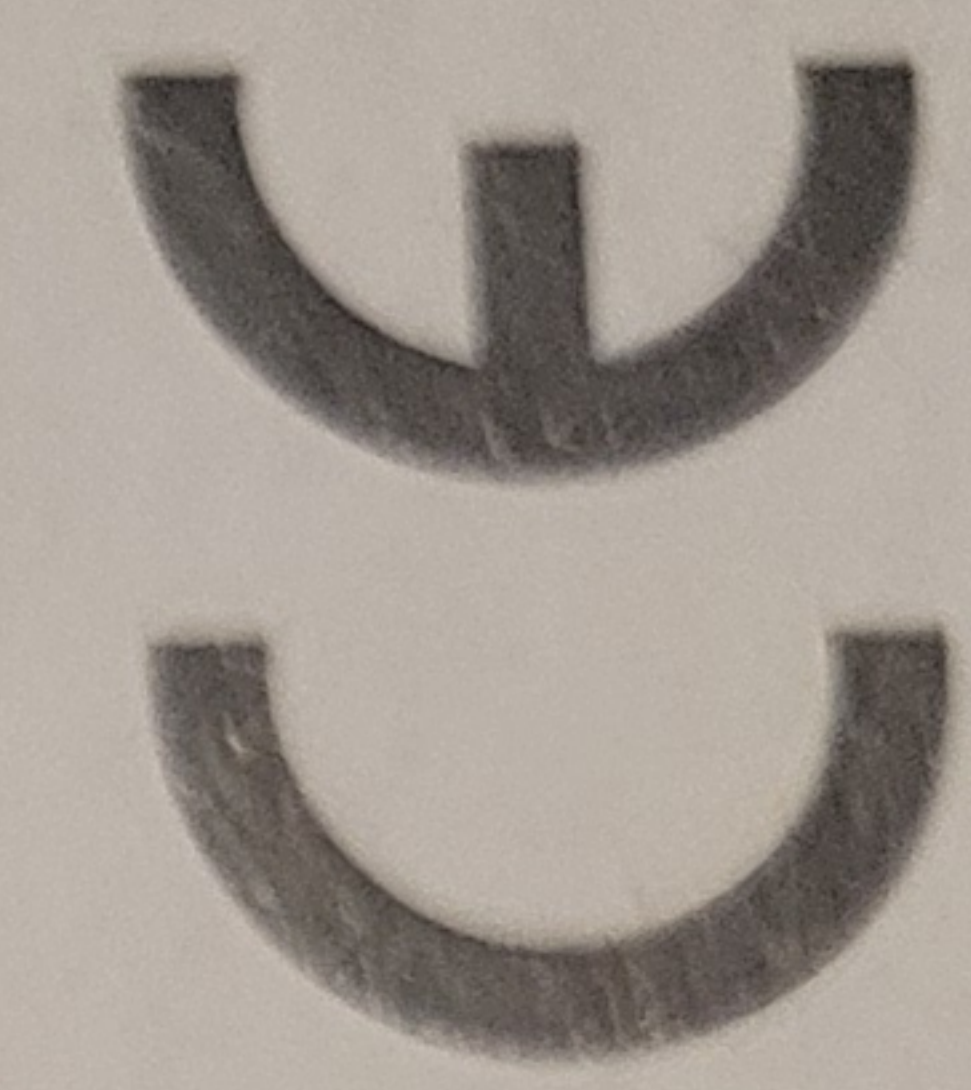
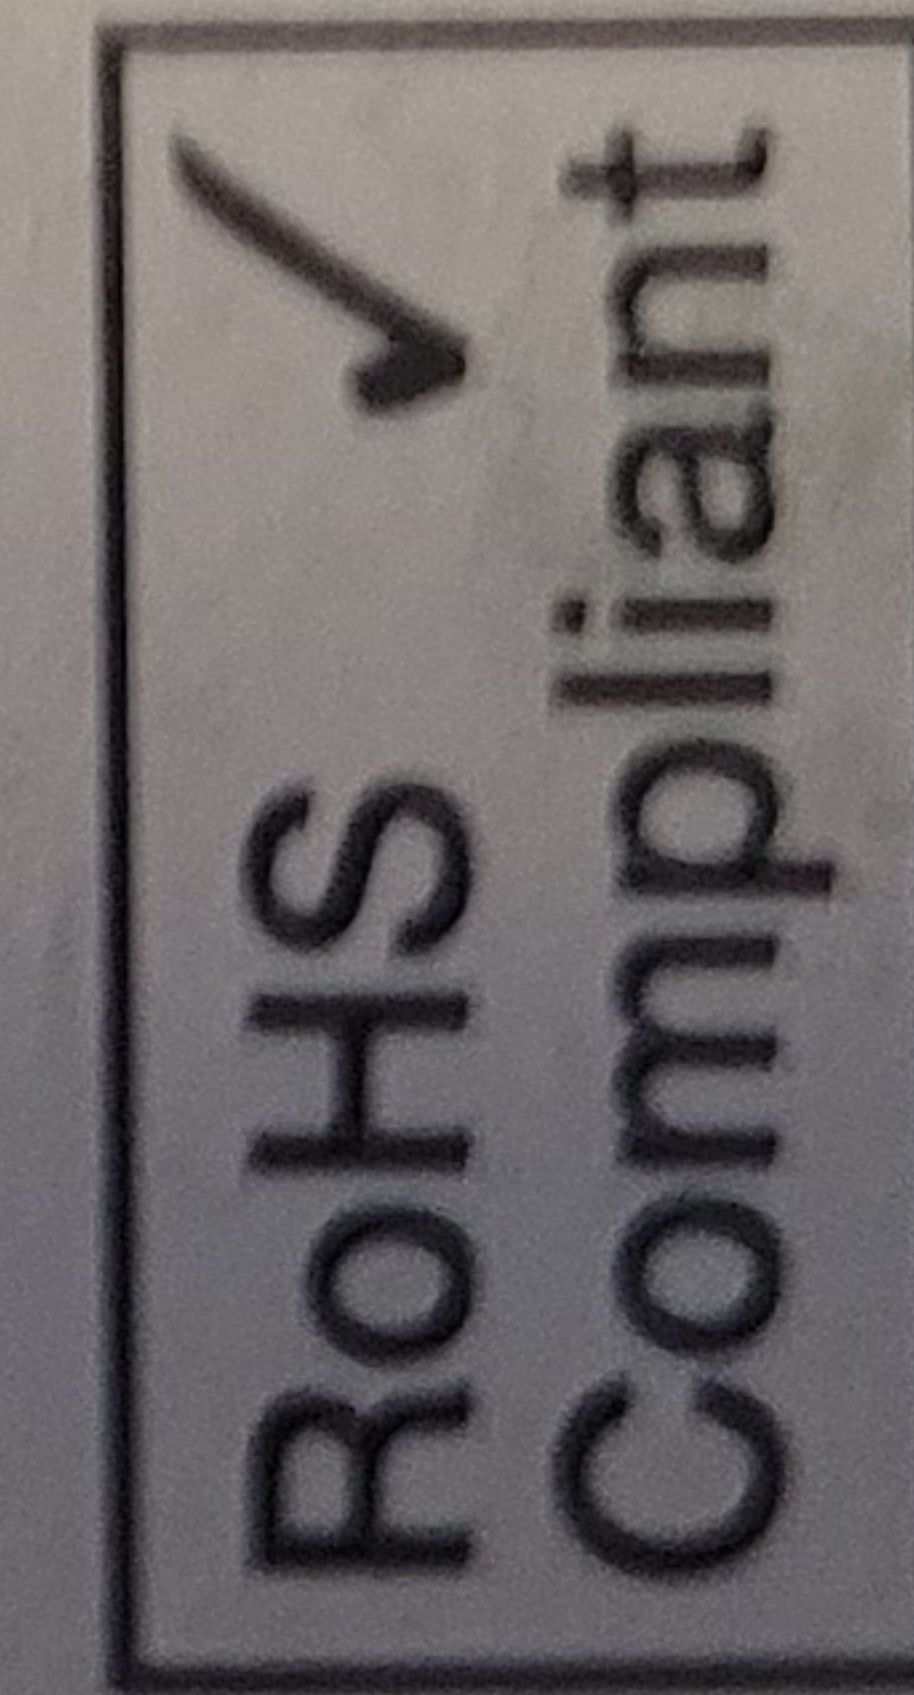
	<p>450 V, 32 A T 85</p> <p>$0,14 - 4 \text{ mm}^2 \text{ f}$ $0,2 - 4 \text{ mm}^2 \text{ r}$</p>
	<p>450 V, 32 A T 85</p> <p>0,2 ... 4 mm²</p>
 <p>LISTED Splicing Wire Connector 667 F</p>  <p>LISTED GROUNDING EQUIP 64KA</p>	<p>600 V max. building wire 1000 V max. signs or luminaires</p> <p>Temperature rating of insulating material 105° C max.</p> <p>AWG 24 - 12 solid / stranded</p>
	<p>Cu $1,6/2 \emptyset$</p> <hr/> <p>JET 20 A 300 V</p>
<p>US-Patent</p>	<p>US 8,794,994 B2, US 9,466,895 B2, US 9,502,790 B2, US 9,124,034 B2, US 9,761,964 B2, US 9,835,103 B2</p>



ПР.154



ERAL



UKA