






SAMPLE PHOTO

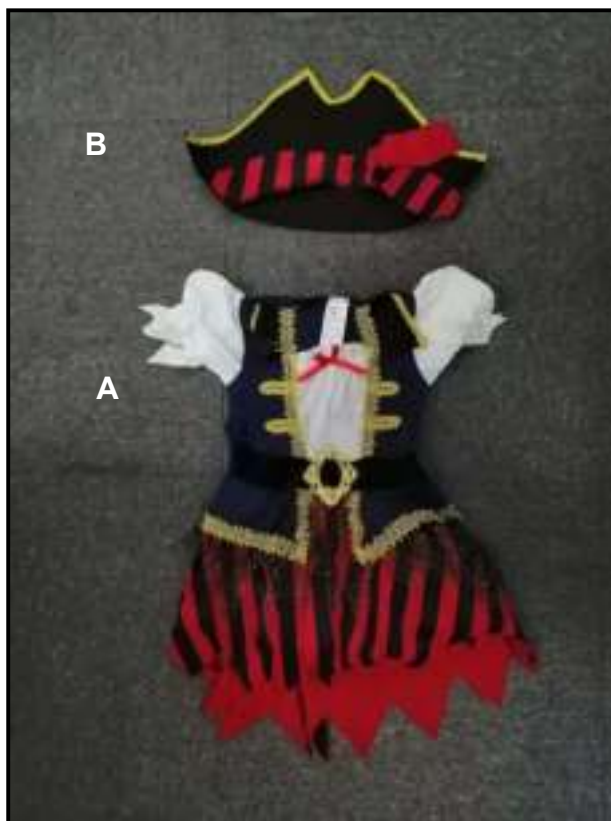

Style No.: C49104'SKC49104

TEST REPORT

Leg Avenue			
Vendor Name :	LUCIDA COSTUMES & ACCESSORIES CO., LTD		
Sample Description :	'2PC. Caribbean pirate'Dress, Hat		
Manufacturer :	LUCIDA COSTUMES & ACCESSORIES CO., LTD		
End Use :	Costume	Color :	Black/Red/White/Golden/Dark Blue
Supplier No. :	n/a	PO :	n/a
Style No. :	C49104'SKC49104		
Labeled Fiber Content :	Not Present		
Recommended Fiber Label:	Dress: "Body: 100% Polyester"		
Country Of Origin :	Cambodia	Country Of Destination :	Not Present
Labeled Age Range :	Not Present	Age Range Applied In Testing :	3-14 years old
Buyer's Name:	Leg Avenue		
Sample Received Date:	2019-12-18	Further Information Date:	2019-12-31
Test Performance Period :	2019-12-18 to 2020-01-06		
Applicant's Submitted Care Instruction :	Lab Recommended Care Instruction :		
Not Present	Hand Wash Cold Only Non-Chlorine Bleach When Needed Line Dry Do not Iron    		

TESTED COMPONENTS LIST:

Sample #	Sample	Material	Color
A	Dress	Textile + Plastic + Rubber + Metallic	Black/Red/White/Golden/Dark blue
B	Hat	Textile + Plastic + Metallic	Black/Red/Golden

The following test item(s) was/were performed on submitted sample(s) and/or component(s) appointed by applicant.

TEST SPECIFICATION :

Test Item(s)	Pass	Fail	Remarks/Tested Component
Fiber Content	A: See Test Result; B: Exempted		
FTC Labeling – RN#	Present		
Use/Care Instruction	A: See Recommended Care Instruction		
Dimensional Stability to Washing	X		A
Appearance after Washing	X		A
Colorfastness to Actual Laundering	X		A
Colorfastness to Chlorine Bleach	A: Not Recommend		
Colorfastness to Non-Chlorine Bleach	A: Recommend		
Colorfastness to Crocking	X		A
Flammability – 16 CFR 1500.44/16 CFR 1500.3(c)(6)(vi)	Not Applicable		
Flammability – 16 CFR 1610 / 1611	X		A, B
Physical and Mechanical Hazards – ASTM F963	Not Applicable		
Drawstrings in Child Upper Outerwear – ASTM F1816	X		A: Pass; B: Not Applicable
Physical and Mechanical Hazards – CPSC Regulations	X		A, B
Phthalates Content	X		A, B
Heavy Metals – ASTM F963	Not Applicable		
Total Lead Content	X		A, B
Total Lead Content in PVC Material	Not Applicable		
Illinois Lead Poisoning Prevention Act (LPPA) - Lead Content in Paint/Similar Surface Coating Material	X		A
Illinois Lead Poisoning Prevention Act (LPPA) - Lead Content in Substrate Materials	X		A, B
Total Cadmium Content – Children's Safe Products Act Law, 70.240 Revised Code of Washington	X		A, B
Soluble Arsenic	X		A, B
Soluble Cadmium	X		A, B
Formaldehyde Content	X		A, B
Mercury Content in Batteries	Not Applicable		
Mechanical Requirement for Children's Jewelry – ASTM F2923	Not Applicable		
Lead in Children's Jewelry – ASTM F2923	Not Applicable		
Antimony, Arsenic, Barium, Cadmium, Chromium, Mercury and Selenium in Paint and Surface Coatings of Children's Jewelry – ASTM F2923	Not Applicable		
Cadmium in Certain Substrate Material of Children's Jewelry – ASTM F2923	Not Applicable		
Nickel in Metal – ASTM F2923	Not Applicable		

Results obtained refer only to samples, products or material received in Laboratory, as described in point related to sample description, and tested in conditions shown in present report. Eurofins Product Testing Service (Shanghai) Co., Ltd ensures that this job has been performed according to our Quality System and complying contract and legal conditions. If you happen to have any comments, please do it by sending email to info.hz@eurofins.com and referring to this report number. Reproduction of this document is only valid if it is done completely and under the written permission of Eurofins Product Testing Service (Shanghai) Co., Ltd. If you happen to have any complaints, please do it by sending email to china.complaint@eurofins.com and referring to this report number.

Recommended Care Instruction:

The dress (Sample A) exhibits satisfactory following the care instruction "Hand Wash Cold, Only Non-Chlorine Bleach When Needed, Line Dry, Do Not Iron




Pass – Meets Leg Avenue's Performance Standard

Fail – Fails to Meet Leg Avenue's Performance Standard

***** FOR FURTHER DETAILS, PLEASE REFER TO THE FOLLOWING PAGE(S) *****

Signed for and on behalf of
Eurofins Product Testing Service (Shanghai) Co., Ltd Hangzhou Branch



Sara Liu
Lab Manager

TEST COMPONENT

Component No.	Component Name	Sample
1	Black mesh fabric with golden glitter(peplum)	A
2	Semi-transparent plastic buckle with golden plating(waist)	A
3	Transparent soft plastic wire(selvage)	A B
4	White elastic rubber of white elastic band (chest/cuffs)	A
5	Golden metallic fiber with yellow threads(selvage)	A B
6	Red/dark purple stripe knit fabric(skirt/hat)	A B
7	Dark blue knit fabric(body)	A
8	White knit fabric(chest/sleeves)	A
9	Red fabric ribbon(chest)	A
10	Black short plush fabric(waist/collar)	A
11	Black non-woven fabric(petticoat/collar)	A
12	Black felt fabric(hat)	B
13	White textile of white elastic band (chest/cuffs)	A

TO BE CONTINUED

TEST RESULT

QUALITATIVE FIBER ANALYSIS

(AATCC 20-2013)

LABELED :	<u>A</u> No Claim	Requirement: Single: No Tolerance
LAB ANALYSIS :	Body: 100% Polyester	

RECOMMENDED LABELED FIBER CONTENT:

Sample A: "Body: 100% Polyester"

The sample (B) is exempted from United States Fiber Labeling laws in accordance with the Textile Fiber Products Labeling Act and it is recommended this product not be labeled for fiber content.

RN

(FTC)

RN#: 130015
(See Remark)

Requirement:
Must be Present

Remark:

The information was provided by client's email.

DIMENSIONAL STABILITY TO HAND WASH

(HZ-SOP-IHTM-001, WOOLITE DETERGENT, 3 WASHES, AT 27°C/ 80°F, LINE DRY)

	<u>Original</u> (Inch)	<u>After 3 Washes</u> (Inch)	<u>Shrinkage</u> (%)	
		<u>A</u>		Requirement: ± 5%
Front length	22.250	22.375	+0.6	
Centre back length	25.000	25.125	+0.5	
Sleeve length	8.875	8.875	0.0	
Chest	12.250	12.125	-1.0	
Hem	33.750	33.750	0.0	
Across shoulder	11.375	11.250	-1.1	
Armhole	5.750	5.750	0.0	
Sleeve opening	4.000	4.000	0.0	

(+) Extension

(-) Shrinkage

APPEARANCE AFTER HAND WASH

(HZ-SOP-IHTM-002, AS PER CARE INSTRUCTION, WOOLITE DETERGENT, 3 WASHES, AT 27°C/ 80°F, LINE DRY)

General Appearance	<u>A</u> Satisfactory	Requirement: Satisfactory
Observation	No Obvious Change	
Color Change	4.5	4.0
Cross Staining	4.5	4.0

TO BE CONTINUED

TEST RESULT

COLORFASTNESS TO ACTUAL LAUNDERING

(HZ-SOP-IHTM-004, AS PER CARE INSTRUCTION, WOOLITE DETERGENT, 3 WASHES, AT 27°C/ 80°F, LINE DRY, MULTIFIBER NO. 10)

	<u>A</u>	Requirement:
<u>COLOR STAIN ON</u>		
ACETATE	4.5	Color Staining: Class 3.0
COTTON	4.5	
NYLON	4.5	
POLYESTER	4.5	
ACRYLIC	4.5	
WOOL	4.5	
CROSS STAINING	4.5	

COLORFASTNESS TO CHLORINE BLEACH

(AATCC TS-001)

	<u>A</u>	Requirement:
COLOR CHANGE	3.5	Class 4.0

COLORFASTNESS TO NON-CHLORINE BLEACH

(AATCC TS-001)

	<u>A</u>	Requirement:
COLOR CHANGE	4.5/4.5	Class 4.0
POWDER / LIQUID		

COLORFASTNESS TO CROCKING

(AATCC8-2016, AATCC GRAY SCALE)

	<u>A</u>	Requirement:
DRY	4.5	Class 3.5
(COLOR STAIN)		
WET	4.5	Class 3.0
(COLOR STAIN)		

Grey Scale for Assessing Colour Change/Staining

- Class 5 negligible or no change or staining
- Class 4 slightly changed or stained
- Class 3 noticeably changed or stained
- Class 2 considerably changed or stained
- Class 1 much changed or stained

TO BE CONTINUED

TEST RESULT

DRAWSTRINGS IN CHILD UPPER OUTERWEAR

(ASTM F1816-18, SECTION 4.1)

A
Comply

Requirement:
Meet Requirement

TO BE CONTINUED

TEST RESULT

Flammability Test

Test Method: Flammability test on Clothing Textiles (16 CFR 1610)

Sample	Burning Time(sec)	Classification
A & B	See worksheet below and on next page(s)	Class 1

Classification:

Class 1: Normal Flammability
 Class 2: Intermediate Flammability
 Class 3: Rapid and Intense Burning

FLAMMABILITY (16 CFR 1610)

SAMPLE DESCRIPTION: A- Red/dark purple stripe knit fabric

DIRECTION TO BE TESTED: Face Lengthwise (From Preliminary Test)

ORIGINAL

AFTER DRYCLEANING/WASHING

TIME OF FLAME SPREAD (s)	BURN CODE	TIME OF FLAME SPREAD (s)	BURN CODE
1 /	1 IBE	P1 /	P1 IBE
2 /	2 IBE	P2 /	P2 IBE
3 /	3 IBE	P3 /	P3 IBE
4 /	4 IBE	P4 /	P4 IBE
5 /	5 IBE	P5 /	P5 IBE
AVG. / SECONDS FOR / SPECIMENS		AVG. / SECONDS FOR / SPECIMENS	
6 /	6 /	P6 /	P6 /
7 /	7 /	P7 /	P7 /
8 /	8 /	P8 /	P8 /
9 /	9 /	P9 /	P9 /
10 /	10 /	P10 /	P10 /

AVG. / SECONDS FOR / SPECIMENS

AVG. / SECONDS FOR / SPECIMENS

SF	SURFACE FLASH ONLY	IBE	IGNITE BUT EXTINGUISHED
DNI	DID NOT IGNITE	BB	BASE BURN
SFBB	SURFACE FLASH - BASE BURN	TSF	TIMED SURFACE FLASH
SF poi	SURFACE FLASH, AT POINT OF IMPINGEMENT ONLY		
SF pw	SURFACE FLASH, PART WAY. NO TIME SHOWN BECAUSE THE SURFACE FLASH, DID NOT REACH THE CORD		
SF uc	SURFACE FLASH, UNDER THE CORD, BUT DOES NOT BREAK THE CORD		
00 SFBB	TIME IN SECONDS, SURFACE FLASH BASE BURN-BASE STARTS BURNING AT POINTS OTHER THAN THE POINT OF IMPINGEMENT		
0.0 SFBB poi	TIME IN SECONDS, SURFACE FLASH, BASE BURN STARTING AT THE POINT OF IMPINGEMENT		

COMMENTS: Pass Class 1, Normal Flammability Of Commercial Standard 16 CFR 1610, Formerly 191-53 of United States Flammability Fabric Act.

TO BE CONTINUED

TEST RESULT

Flammability Test

FLAMMABILITY (16 CFR 1610)

SAMPLE DESCRIPTION: A- Black mesh with golden glitter.

DIRECTION TO BE TESTED: Face Lengthwise (From Preliminary Test)

ORIGINAL

TIME OF FLAME SPREAD (s)	BURN CODE
1 /	1 IBE
2 /	2 IBE
3 /	3 IBE
4 /	4 IBE
5 /	5 IBE

AVG. / SECONDS FOR / SPECIMENS

6 /	6 /
7 /	7 /
8 /	8 /
9 /	9 /
10 /	10 /

AVG. / SECONDS FOR / SPECIMENS

SF	SURFACE FLASH ONLY
DNI	DID NOT IGNITE
SFBB	SURFACE FLASH - BASE BURN
SF poi	SURFACE FLASH, AT POINT OF IMPINGEMENT ONLY
SF pw	SURFACE FLASH, PART WAY. NO TIME SHOWN BECAUSE THE SURFACE FLASH, DID NOT REACH THE CORD
SF uc	SURFACE FLASH, UNDER THE CORD, BUT DOES NOT BREAK THE CORD
00 SFBB	TIME IN SECONDS, SURFACE FLASH BASE BURN-BASE STARTS BURNING AT POINTS OTHER THAN THE POINT OF IMPINGEMENT
0.0 SFBB poi	TIME IN SECONDS, SURFACE FLASH, BASE BURN STARTING AT THE POINT OF IMPINGEMENT

AFTER DRYCLEANING/WASHING

TIME OF FLAME SPREAD (s)	BURN CODE
P1 /	P1 IBE
P2 /	P2 IBE
P3 /	P3 IBE
P4 /	P4 IBE
P5 /	P5 IBE

AVG. / SECONDS FOR / SPECIMENS

P6 /	P6 /
P7 /	P7 /
P8 /	P8 /
P9 /	P9 /
P10 /	P10 /

AVG. / SECONDS FOR / SPECIMENS

IBE	IGNITE BUT EXTINGUISHED
BB	BASE BURN
TSF	TIMED SURFACE FLASH

COMMENTS: Pass Class 1, Normal Flammability Of Commercial Standard 16 CFR 1610, Formerly 191-53 of United States Flammability Fabric Act.

TO BE CONTINUED

TEST RESULT

Flammability Test

FLAMMABILITY (16 CFR 1610)

SAMPLE DESCRIPTION: A-Black non-woven fabric.

DIRECTION TO BE TESTED: Face Lengthwise (From Preliminary Test)

ORIGINAL

AFTER DRYCLEANING/WASHING

TIME OF FLAME SPREAD (s)		BURN CODE		TIME OF FLAME SPREAD (s)		BURN CODE	
1	/	1	IBE	P1	/	P1	IBE
2	/	2	IBE	P2	/	P2	IBE
3	/	3	IBE	P3	/	P3	IBE
4	/	4	IBE	P4	/	P4	IBE
5	/	5	IBE	P5	/	P5	IBE
AVG. / SECONDS FOR / SPECIMENS				AVG. / SECONDS FOR / SPECIMENS			
6	/	6	/	P6	/	P6	/
7	/	7	/	P7	/	P7	/
8	/	8	/	P8	/	P8	/
9	/	9	/	P9	/	P9	/
10	/	10	/	P10	/	P10	/
AVG. / SECONDS FOR / SPECIMENS				AVG. / SECONDS FOR / SPECIMENS			

SF	SURFACE FLASH ONLY	IBE	IGNITE BUT EXTINGUISHED
DNI	DID NOT IGNITE	BB	BASE BURN
SFBB	SURFACE FLASH - BASE BURN	TSF	TIMED SURFACE FLASH
SF poi	SURFACE FLASH, AT POINT OF IMPINGEMENT ONLY		
SF pw	SURFACE FLASH, PART WAY. NO TIME SHOWN BECAUSE THE SURFACE FLASH, DID NOT REACH THE CORD		
SF uc	SURFACE FLASH, UNDER THE CORD, BUT DOES NOT BREAK THE CORD		
00 SFBB	TIME IN SECONDS, SURFACE FLASH BASE BURN-BASE STARTS BURNING AT POINTS OTHER THAN THE POINT OF IMPINGEMENT		
0.0 SFBB poi	TIME IN SECONDS, SURFACE FLASH, BASE BURN STARTING AT THE POINT OF IMPINGEMENT		

COMMENTS: Pass Class 1, Normal Flammability Of Commercial Standard 16 CFR 1610, Formerly 191-53 of United States Flammability Fabric Act.

TO BE CONTINUED

TEST RESULT

Flammability Test

FLAMMABILITY (16 CFR 1610)

SAMPLE DESCRIPTION: A- White knit fabric.

DIRECTION TO BE TESTED: Face Lengthwise (From Preliminary Test)

ORIGINAL

AFTER DRYCLEANING/WASHING

TIME OF FLAME SPREAD (s)		BURN CODE		TIME OF FLAME SPREAD (s)		BURN CODE	
1	/	1	IBE	P1	/	P1	IBE
2	/	2	IBE	P2	/	P2	IBE
3	/	3	IBE	P3	/	P3	IBE
4	/	4	IBE	P4	/	P4	IBE
5	/	5	IBE	P5	/	P5	IBE
AVG. / SECONDS FOR / SPECIMENS				AVG. / SECONDS FOR / SPECIMENS			
6	/	6	/	P6	/	P6	/
7	/	7	/	P7	/	P7	/
8	/	8	/	P8	/	P8	/
9	/	9	/	P9	/	P9	/
10	/	10	/	P10	/	P10	/
AVG. / SECONDS FOR / SPECIMENS				AVG. / SECONDS FOR / SPECIMENS			

SF	SURFACE FLASH ONLY	IBE	IGNITE BUT EXTINGUISHED
DNI	DID NOT IGNITE	BB	BASE BURN
SFBB	SURFACE FLASH - BASE BURN	TSF	TIMED SURFACE FLASH
SF poi	SURFACE FLASH, AT POINT OF IMPINGEMENT ONLY		
SF pw	SURFACE FLASH, PART WAY. NO TIME SHOWN BECAUSE THE SURFACE FLASH, DID NOT REACH THE CORD		
SF uc	SURFACE FLASH, UNDER THE CORD, BUT DOES NOT BREAK THE CORD		
00 SFBB	TIME IN SECONDS, SURFACE FLASH BASE BURN-BASE STARTS BURNING AT POINTS OTHER THAN THE POINT OF IMPINGEMENT		
0.0 SFBB poi	TIME IN SECONDS, SURFACE FLASH, BASE BURN STARTING AT THE POINT OF IMPINGEMENT		

COMMENTS: Pass Class 1, Normal Flammability Of Commercial Standard 16 CFR 1610, Formerly 191-53 of United States Flammability Fabric Act.

TO BE CONTINUED

TEST RESULT

Flammability Test

FLAMMABILITY (16 CFR 1610)

SAMPLE DESCRIPTION: B - Black non-woven fabric.

DIRECTION TO BE TESTED: Raised Surface Lengthwise (From Preliminary Test)

ORIGINAL

AFTER DRYCLEANING/WASHING

TIME OF FLAME SPREAD (s)		BURN CODE		TIME OF FLAME SPREAD (s)		BURN CODE	
1	/	1	SF poi	P1	/	P1	SF poi
2	/	2	SF poi	P2	/	P2	SF poi
3	/	3	SF poi	P3	/	P3	SF poi
4	/	4	SF poi	P4	/	P4	SF poi
5	/	5	SF poi	P5	/	P5	SF poi
AVG. / SECONDS FOR / SPECIMENS				AVG. / SECONDS FOR / SPECIMENS			
6	/	6	/	P6	/	P6	/
7	/	7	/	P7	/	P7	/
8	/	8	/	P8	/	P8	/
9	/	9	/	P9	/	P9	/
10	/	10	/	P10	/	P10	/

AVG. / SECONDS FOR / SPECIMENS

AVG. / SECONDS FOR / SPECIMENS

SF	SURFACE FLASH ONLY	IBE	IGNITE BUT EXTINGUISHED
DNI	DID NOT IGNITE	BB	BASE BURN
SFBB	SURFACE FLASH - BASE BURN	TSF	TIMED SURFACE FLASH
SF poi	SURFACE FLASH, AT POINT OF IMPINGEMENT ONLY		
SF pw	SURFACE FLASH, PART WAY. NO TIME SHOWN BECAUSE THE SURFACE FLASH, DID NOT REACH THE CORD		
SF uc	SURFACE FLASH, UNDER THE CORD, BUT DOES NOT BREAK THE CORD		
00 SFBB	TIME IN SECONDS, SURFACE FLASH BASE BURN-BASE STARTS BURNING AT POINTS OTHER THAN THE POINT OF IMPINGEMENT		
0.0 SFBB poi	TIME IN SECONDS, SURFACE FLASH, BASE BURN STARTING AT THE POINT OF IMPINGEMENT		

COMMENTS: Pass Class 1, Normal Flammability Of Commercial Standard 16 CFR 1610, Formerly 191-53 of United States Flammability Fabric Act.

TO BE CONTINUED

TEST RESULT

Physical and Mechanical Hazards

Test Request: The Mechanical Hazards Requirements of 16 CFR 1500, after Use and Abuse Tests

Section	Description	Result
A	Dress	Pass
B	Hat	Pass

Description	Result
The use and abuse tests conducted are:	As Received & Normal Use (1500.50) Impact Test (1500. 53(b)) Torque Test (1500. 53(e)) Tension Test (1500. 53(f)) Compression Test (1500. 53(g))
16 CFR 1500.47 &1500.86(a)(6) – Sound Pressure Level produced by toy cap	NA
16 CFR 1501 – Small Parts	NA
16 CFR 1500.49 – Sharp Edges	P
16 CFR 1500.48 – Sharp Points	P
16 CFR 1510 – Rattles	NA
16 CFR 1511 – Pacifier	NA

Remark:

P – Pass,
 NA – Not Applicable

TO BE CONTINUED

TEST RESULT

PHTHALATES CONTENT

Test Request: Phthalates Content as per client's request

Test Method: EPA 3550C:2007, EPA 8270E:2018, solvent extraction and quantification by GC-MS.

Tested Item(s)	CAS No.	Unit	Limit	MDL	Result				
					1	2	3	4	5
Dibutyl phthalate (DBP)	84-74-2	%	0.1	0.005	ND	ND	ND	ND	ND
Butyl benzyl phthalate (BBP)	85-68-7	%	0.1	0.005	ND	ND	ND	ND	ND
Di-2-ethylhexyl phthalate (DEHP)	117-81-7	%	0.1	0.005	ND	ND	ND	ND	ND
Di-iso-nonyl phthalate (DINP)	28553-12-0	%	0.1	0.005	ND	ND	ND	ND	ND
Di-n-octyl phthalate (DNOP)	117-84-0	%	0.1	0.005	ND	ND	ND	ND	ND
Di-iso-decyl phthalate (DIDP)	26761-40-0	%	0.1	0.005	ND	ND	ND	ND	ND
Di-n-hexyl phthalate (DnHP)	84-75-3	%	0.1	0.005	ND	ND	ND	ND	ND
Diethylphthalate (DEP)	84-66-2	%	0.1	0.005	ND	ND	ND	ND	ND
Dicyclohexyl ortho-phthalate (DCHP)	84-61-7	%	0.1	0.005	ND	ND	ND	ND	ND
Monobutyl phthalate (MBP)	131-70-4	%	0.1	0.005	ND	ND	ND	ND	ND
Di-n-pentyl phthalate (DNPP)	131-18-0	%	0.1	0.005	ND	ND	ND	ND	ND
Diisobutyl phthalate (DIBP)	84-69-5	%	0.1	0.005	ND	ND	ND	ND	ND

Remark:

MDL = method detection limit

ND = not detected, less than MDL

1 mg/kg = 1 ppm = 0.0001%

TO BE CONTINUED

TEST RESULT

TOTAL LEAD CONTENT

Test Request: Total lead content as per client's request
 Test Method: EPA 3052:1996
 Microwave digestion method was used and total lead content was determined by ICP-OES.

Tested Item(s)	Unit	Limit	MDL	Result			
				1			
Total Lead	mg/kg	90	10	ND			

Tested Item(s)	Unit	Limit	MDL	Result			
				2	3	4	5
Total Lead	mg/kg	90	10	ND	ND	ND	ND

Remark:
 mg/kg = milligram per kilogram
 MDL = method detection limit
 ND = Not detected, less than MDL

TOTAL LEAD CONTENT IN PAINT AND OTHER SIMILAR SURFACE COATINGS

Test Request: Total lead in paint/ similar surface coatings as specified in Illinois Lead Poisoning Prevention Act (LPPA).
 Test Method: CPSC-CH-E1003-09.1
 The sample was acid digested, and total lead content was determined by ICP-OES.

Tested Item(s)	Unit	Limit	MDL	Result			
				1			
Total Lead	mg/kg	40	10	ND			

Remark:
 mg/kg = milligram per kilogram
 MDL = method detection limit
 ND = Not detected, less than MDL

TO BE CONTINUED

TEST RESULT

TOTAL LEAD CONTENT IN SUBSTRATE

Test Request: Total lead in substrate as specified in Illinois Lead Poisoning Prevention Act (LPPA).

Test Method: CPSC-CH-E1002-08.3

The sample was acid digested, and total lead content was determined by ICP-OES.

Tested Item(s)	Unit	Limit	MDL	Result			
				2	3	4	5
Total Lead	mg/kg	40	10	ND	ND	ND	ND

Remark:

mg/kg = milligram per kilogram

MDL = method detection limit

ND = Not detected, less than MDL

TOTAL CADMIUM CONTENT

Test Request: Prohibition on the manufacturing and sale of children's products containing cadmium as specified in Children's Safe Products Act Law, section 70.240.020, Revised Code of Washington.

Test Method: EPA 3052:1996, acid digestion digestion method was used and total cadmium content was determined by ICP-OES.

Tested Item(s)	Unit	Limit	MDL	Result				
				1	2	3	4	5
Total Cadmium	mg/kg	40	5	ND	ND	ND	ND	ND

Remark:

mg/kg = milligram per kilogram

MDL = method detection limit

ND = Not detected, less than MDL

SOLUBLE ARSENIC CONTENT

Test Request: Soluble arsenic content as specified in US California Proposition 65 (Halloween)

Test Method: Acid extraction method was used in accord with ASTM International Standard ASTM F963-17, Section 8.3.2 to 8.3.5, and toxic elements content was determined by ICP-OES.

Tested Item(s)	Unit	Limit	MDL	Result				
				1	2	3	4	5
Soluble Arsenic	mg/kg	25	5	ND	ND	ND	ND	ND

Remark:

mg/kg = milligram per kilogram

MDL = method detection limit

ND = Not detected, less than MDL

TO BE CONTINUED

TEST RESULT

SOLUBLE CADMIUM CONTENT

Test Request: Soluble cadmium content as specified in US California Proposition 65 (Halloween)

Test Method: Acid extraction method was used in accord with ASTM International Standard ASTM F963-17, Section 8.3.2 to 8.3.5, and toxic elements content was determined by ICP-OES.

Tested Item(s)	Unit	Limit	MDL	Result				
				1	2	3	4	5
Soluble Cadmium	mg/kg	75	5	ND	ND	ND	ND	ND

Remark:

mg/kg = milligram per kilogram

MDL = method detection limit

ND = Not detected, less than MDL

FORMALDEHYDE CONTENT

Test Request: Formaldehyde content as specified in US California Proposition 65 (Halloween)

Test Method: ISO 14184-1:2011, free and hydrolyzed formaldehyde (water extraction method).

Tested Item(s)	CAS No.	Unit	Limit	MDL	Result					
					1	5	6	7	8	9
Formaldehyde	50-00-0	mg/kg	75	16	ND	ND	ND	ND	ND	ND

Tested Item(s)	CAS No.	Unit	Limit	MDL	Result			
					10	11	12	13
Formaldehyde	50-00-0	mg/kg	75	16	ND	ND	ND	ND

Remark:

mg/kg = milligram per kilogram

MDL = method detection limit

ND = Not detected, less than MDL

*** END OF THE REPORT ***

Laboratory Summary Information for Certificate of Compliance (COC)

I (we) hereby confirm based on the test results in this report, that the product or components described below were tested and comply with the applicable rules, bans, regulations and standards under the CPSIA (Consumer Product Safety Improvement Act) or any other Act enforced by the CPSC and checked on the list below.

Product/Component description provided by submitter:

'2PC. Caribbean pirate'Dress. Hat

Style No.: C49104'SKC49104

Safety Regulation Citations

- Wearing Apparel Flammability 16 CFR 1610
 - Sample is exempt from flammability testing in accordance with:
 - For plain fabric, if fabric weight is larger than 2.6 oz/yd²
 - If materials are acrylic, modacrylic, nylon, polyester, olefin and wool or combined
 - Gloves, hats and footwear
 - Narrow fabrics and loose fibrous materials manufactured less than 50 mm (2 in) or 50 mm by 150 mm (2 in by 6 in) specimen cannot be cut due to the nature of the item
 - Clothing and fabrics are not intended to be used for clothing
- Flammability Standard for Children's Sleepwear 16CFR 1615 and 1616
- Small Parts 16 C.F.R Part 1501 and 1500.50 - 53
- Sharp Points and Edges 16CFR 1500.48 and 49
- Lead Paint Ban 16 C.F.R. 1303
- Lead in surface coating CPSIA Section 101
- Lead in substrate CPSIA Section 101
- Federal Hazardous Substances Act 15 U.S.C 1261
- Phthalates 16 CFR 1307

Date of testing:

Date of TP testing: 2019-12-18 to 2020-01-06

TPCA (Third Party Conformity Assessment Body):

Place of TP testing: Hangzhou

Test Report No.: EFHZ19121359-CG-01

TPCA name: Eurofins Product Testing Service (Shanghai) Co., Ltd Hangzhou Branch

TPCA address: Room 301-307, 3/F, 1st Building, Huaye Hi-Tech Industrial Park, No.1180, Bin'an Road, Binjiang District, Hangzhou, Zhejiang Province, China, 310052

TPCA telephone number: 86-571-81907010

The information on this sheet is ONLY applicable for the item tested in this report.

* This is for Summary Information only. Supplier must prepare COC based on the format provided by Leg Avenue.