

Stored pressure

Foam


2 Lt

Temperature ranges

0°C + 60°C



On request

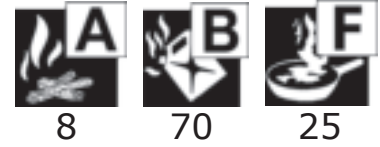

BODY

ALUMINUM

Seamless, deep drawn aluminum alloy body, ensures maximum sealing and, thanks to its light weight, perfect handling. Externally painted with polyester resin

VALVE

ACETALYC RESIN

Squeeze grip lever operated valve with acetal resin body, ensuring perfect protection against corrosion. The shock-proof pressure gauge is equipped with a non-return valve to allow pressure control and with a sintered filter to protect sensitive parts

EXTINGUISHING AGENT

Water with fire retardant and AFFF. All parts in contact with the extinguishing agent are protected against corrosion

PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added, to allow electronic leak detection

STANDARD PACKAGING

4 pieces cardboard box, robust and suitable for transport



WEIGHT
Kg

2,58

DIMENSION
mm

108 Ø x 378

Accessories

● Standard ○ On request

BRACKET



● Polypropylene bracket



○ Steel bracket



○ Plastic band

HOSE RINGS & PROTECTIVE BASE

ADDITIONAL FEATURES



● One color screen printing



○ Two-color PVC label

PACKAGING



○ One-piece white cardboard box




○ One-piece colored cardboard box

Technical data

FIRE RATINGS	8A 70B 25F	
CHARGE	2 kg ± 3%	
CYLINDER	Manufacturing process	Deep drawn
	External painting	Polyester resin, minimum thickness 50 micron
	Corrosion resistance	480 h minimum according to ISO 9227:2017
EXTINGUISHING AGENT	Water + Additives	
PROPELLANT	Nitrogen or nitrogen + helium	
DISCHARGE	Discharge time	~ 18 s
PRESSURE	Operating pressure at 20 °C	11 bar
	Operating pressure at 60 °C	13 bar
	Operating pressure at 0 °C	9 bar
DIMENSIONS	Overall height	378 mm
	Bottle outer diameter	108 mm
	Empty / Charged	0,58 kg / 2,58 kg
PACKING SPECIFICATIONS	Standard packing	4 pieces cardboard box
	Carton size (B x L x H)	240 x 245 x 405 mm
	Weight per carton	11,05 kg
	Pallet	60 cartons
	Pallet size (B x L x H)	800 x 1200 x 1764 mm
	Pallet volume	1,68 m ³
	Weight per pallet (net/gross)	663 kg / 683 kg

© REPRODUCTION IS FORBIDDEN

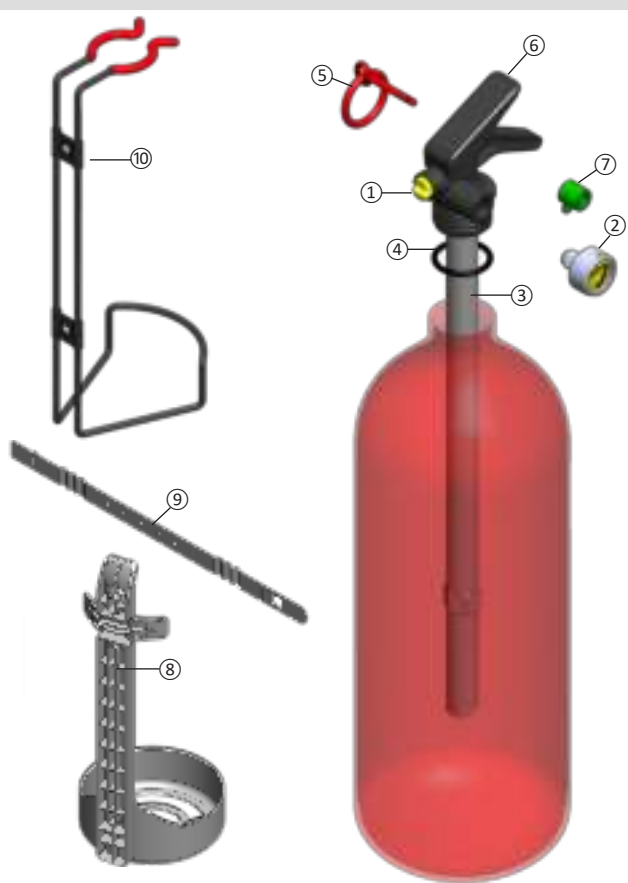

Nr.	Description	Code
1	Valve with black lever and o-ring, without gauge and safety pin	00.452B.8505.01
2	Pressure gauge	00.652A.4900.10
3	Dip tube	00.800B.5900.00
4	O-ring for the valve	00.652A.5010.00
5	Safety pin	00.652A.5020.00
6	Black lever	00.652A.6050.00
7	Seal green	00.652A.5030.VE
8	Bracket	00.682B.2500.00
9	Bracket strip	00.682B.2510.00
10	Steel Wire Bracket	00.800B.2961.00

09.450B.01.10.2021

ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)
 Tel. 0382.4533 Fax. 0382.920279
 info@anaf.eu | www.anaf.eu

