

CONTENTS

- 1 x GO bar
- 1 x Lightning to USB-C Cable
- 1 x USB-C OTG Cable
- 1 x Leather travel Case
- 1 x USB-C to USB-A Adapter
- 1 x User Manual
- 1 x Instruction card

SPECIFICATIONS


Input:	USB-C
Formats:	
PCM	44.1/48/88.2/96/176.4/192/352.8/384kHz
DSD	2.8/3.1/5.6/6.1/11.3/12.3MHz
DXD	352.8/384kHz
MQA	Full Decoder
DAC:	Bit-Perfect DSD & DXD DAC by Cirrus Logic
Headphone Outputs:	BAL 4.4mm/UnBAL 3.5mm
Power Output:	
Balanced:	475mW@32Ω; 7.2V@600Ω
UnBAL:	300mW@32Ω; 3.8V@600Ω
Output Impedance:	<1Ω (BAL/UnBAL)*
SNR:	132dBA / 108dBA (BAL/UnBAL)
DNR:	109dB(A) / 108dB(A) (BAL/UnBAL)
THD + N:	
Balanced:	<0.002% (6.5mW/2.0V @ 600Ω)
UnBAL:	<0.09% (100mW/1.27V @ 16Ω)
Frequency Response:	20Hz - 45kHz (-3dB)
Power:	<4W amx.
Dimensions:	65 x 22 x 13.2 mm (2.6" x 0.9" x 0.5")
Net weight:	28.5g (1.0 oz)
Warranty period:	12 months

*With iEMatch engaged: <3.6Ω

**Specifications are subject to change without notice.



ABBINGDON EU BV
Mercatorweg 28 Arnhem
6827 DC Netherlands

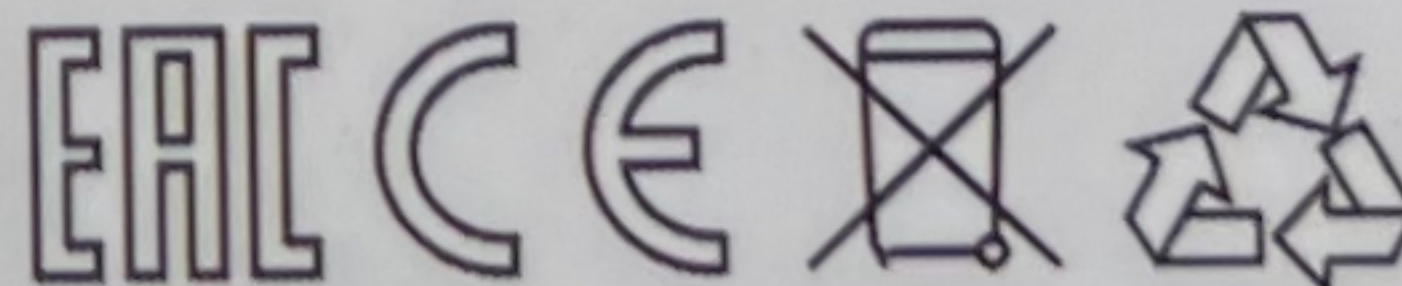

Technology licensed from
AMR (UK). Assembled in China

Ver1.1



S/N:

ifi
audio