


Part 3: Installation steps


Step 1:

Lock the ring marked ① with screws, and connect to the positions of ① of the suction top.

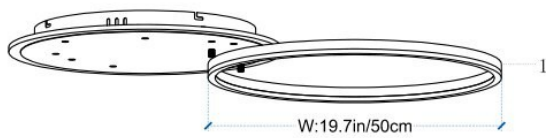

Step 2:


Lock the ring marked ② with screws, and connect to the positions of ② of the suction top.

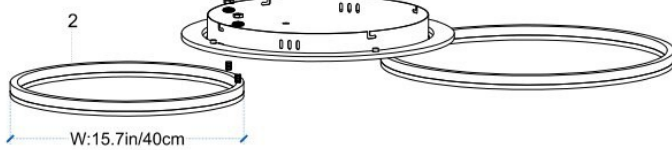

Step 3:

Lock the ring marked ③ with a derrick ③, and connect to the positions of ③ of the suction top.


Note : the installation direction of long and short screw teeth is as follows, don't reverse the installation, otherwise, the ring will not work.

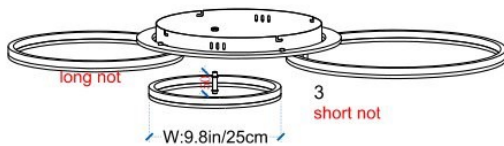

Step 4:

Lock the ring marked ④ with three derricks ④, and connect to the positions of ④ of the suction top.


Note : the installation direction of long and short screw teeth is as follows, don't reverse the installation, otherwise, the ring will not work.

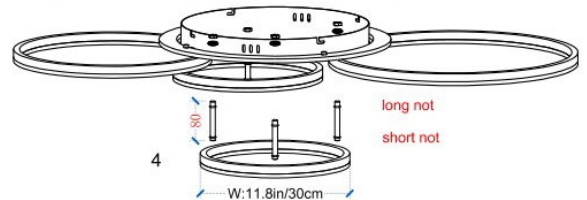

Step 5:


Connect all wires of the rings to the power supply.

Note: confirm whether the terminal is inserted in place, gently pull without loosening.

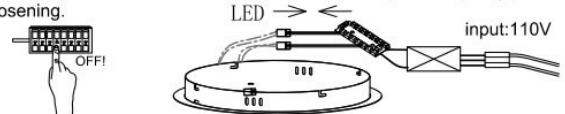

Step 6:

Fix the hang bracket to the top of the wall

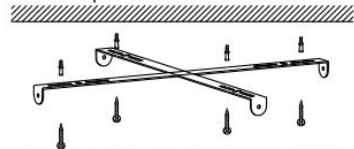

Step 7: Hardwired

Blue wire is natural, yellow wire is earth, brown wire is live.

Last step:

Connect the light to the electricity and fix it on the hang bracket, fixing the side screws of the suction top.

