


### 3.2.6 TEST RESULTS

EUT :	PATCH CABLE	Model Name :	SP-PC5U001
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2017-09-25
Test Mode :	Running	Polarization :	Horizontal
Test Power :	DC5V		

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB)	(dBuV)	(dBuV)	(dB)	(cm)	(deg.)	
1	37.6798	26.84	-14.19	12.65	40.00	-27.35			peak
2	123.6985	27.07	-14.06	13.01	40.00	-26.99			peak
3	225.3080	27.33	-17.29	10.04	40.00	-29.96			peak
4	338.4001	26.10	-13.12	12.98	47.00	-34.02			peak
5	629.4772	26.84	-9.04	17.80	47.00	-29.20			peak
6*	932.2715	26.56	-3.15	23.41	47.00	-23.59			peak

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

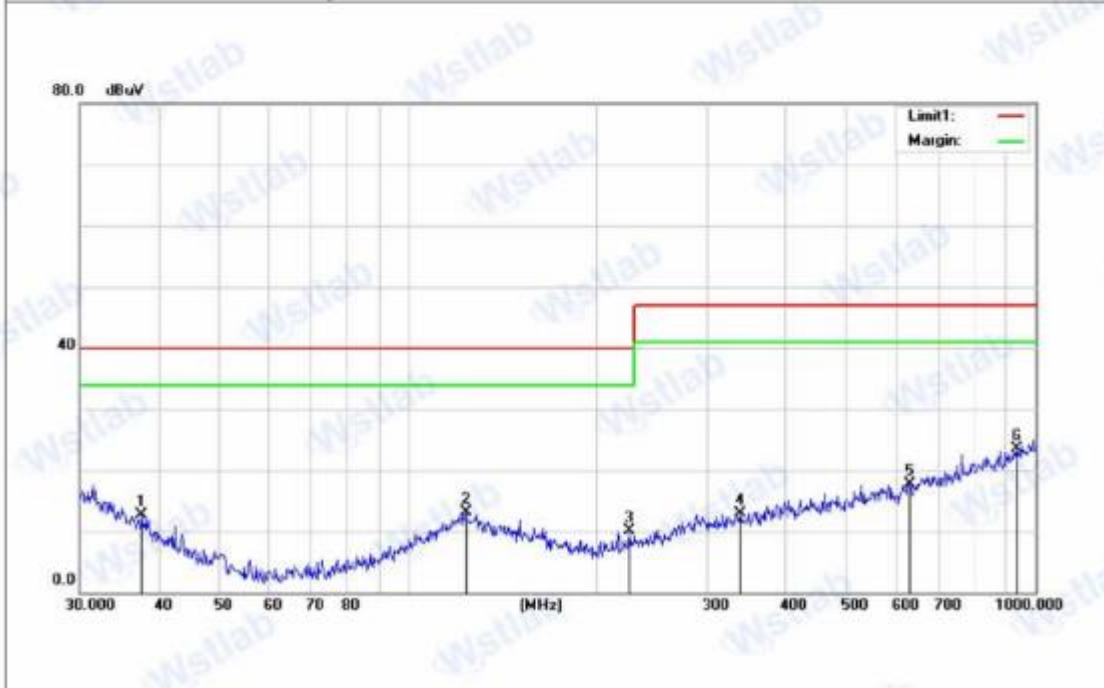

EUT :	PATCH CABLE	Model Name :	SP-PC5U001
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2017-09-25
Test Mode :	Running	Polarization :	Vertical
Test Power :	DC5V		

No. <sup>o</sup>	Frequency <sup>o</sup> (MHz) <sup>o</sup>	Reading <sup>o</sup> (dBuV) <sup>o</sup>	Correct <sup>o</sup> Factor(dB) <sup>o</sup>	Result <sup>o</sup> (dBuV) <sup>o</sup>	Limit <sup>o</sup> (dBuV) <sup>o</sup>	Margin <sup>o</sup> (dB) <sup>o</sup>	Height <sup>o</sup> (cm) <sup>o</sup>	Degree <sup>o</sup> (deg.) <sup>o</sup>	Remark <sup>o</sup>
1 <sup>o</sup>	33.0950 <sup>o</sup>	25.05 <sup>o</sup>	-11.10 <sup>o</sup>	13.95 <sup>o</sup>	40.00 <sup>o</sup>	-26.05 <sup>o</sup>	<sup>o</sup>	<sup>o</sup>	peak <sup>o</sup>
2 <sup>o</sup>	125.0066 <sup>o</sup>	24.68 <sup>o</sup>	-14.14 <sup>o</sup>	10.54 <sup>o</sup>	40.00 <sup>o</sup>	-29.46 <sup>o</sup>	<sup>o</sup>	<sup>o</sup>	peak <sup>o</sup>
3 <sup>o</sup>	289.0021 <sup>o</sup>	25.29 <sup>o</sup>	-13.42 <sup>o</sup>	11.87 <sup>o</sup>	47.00 <sup>o</sup>	-35.13 <sup>o</sup>	<sup>o</sup>	<sup>o</sup>	peak <sup>o</sup>
4 <sup>o</sup>	396.2415 <sup>o</sup>	27.23 <sup>o</sup>	-12.33 <sup>o</sup>	14.90 <sup>o</sup>	47.00 <sup>o</sup>	-32.10 <sup>o</sup>	<sup>o</sup>	<sup>o</sup>	peak <sup>o</sup>
5 <sup>o</sup>	636.1340 <sup>o</sup>	26.53 <sup>o</sup>	-8.86 <sup>o</sup>	17.67 <sup>o</sup>	47.00 <sup>o</sup>	-29.33 <sup>o</sup>	<sup>o</sup>	<sup>o</sup>	peak <sup>o</sup>
6* <sup>o</sup>	916.0687 <sup>o</sup>	24.70 <sup>o</sup>	-3.57 <sup>o</sup>	21.13 <sup>o</sup>	47.00 <sup>o</sup>	-25.87 <sup>o</sup>	<sup>o</sup>	<sup>o</sup>	peak <sup>o</sup>

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Antenna Factor + Cable Loss.
3. N/A means All Data have pass Limit

