

Installation Steps




NO.1 Can be cut at the scissors position.



NO.2 One end of the pin tip is aligned with the wire.



NO.3 The tip of the pin is inserted into the lead of the lamp strip.

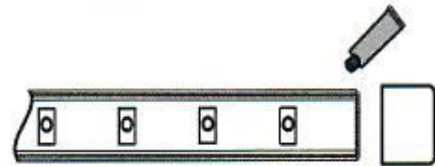

NO.4 The tail of the lamp is injected with glue to seal.

Remarks: The above gelling method only plays the role of fixed assembly and protective electric shock, and can not play a waterproofing role; In outdoor use, the joint part must be placed in a water-free environment or professional electrical personnel to seal each joint position to ensure that each joint position will not be flooded.



Safety Cautions:

1. Please specify the power of the product before use, ensure that the power supply line is not overloaded, the circuit has a circuit protector, and ensure that the light belt works within the voltage parameter $\pm 5\%$.

2. If the length is to be defined, it shall be cut at the clipping position marked by the light band, After the shear installation, attention should be paid to fixing and waterproofing the joint position to avoid burning products or safety accidents.

3. Do not distort the lampband continuously. Multiple distortions can cause fatigue damage to the internal power line. The distortion angle is not less than 45 degrees. Do not bend in radians below 60mm in diameter.

4. For the stable work of this product, please use it in some well-ventilated places. It is strictly forbidden to light the entire roll of the lampband together. The lampband must be spread out before lighting the test.

5. In order to ensure the life of the lampband, it is not possible to pull the product hard during installation, and it is forbidden to collide and squeeze the surface of the lamp. Light bar installation, fixed must be firm, can not have floating, swinging phenomenon. Otherwise, it causes fatigue and damage to the lamp strip.

6. The light belt of this product is partially waterproof IP65. When the joint is shipped, it is only used as a fixed and protected electric shock. In outdoor use, the joint part must be placed in a water-free environment or professional electrical personnel to seal the joint position to ensure that the joint position will not be flooded.

7. Do not use wire and other metal materials to tighten the lamp to install and fix it so that the wire does not fall into the lamp bar, causing short circuit leakage, burning the lamp bar, etc.;

8. This product is not a children's toy, but it is easy to arouse children's interest. Please install it in a place not accessible to children or under adult supervision.