













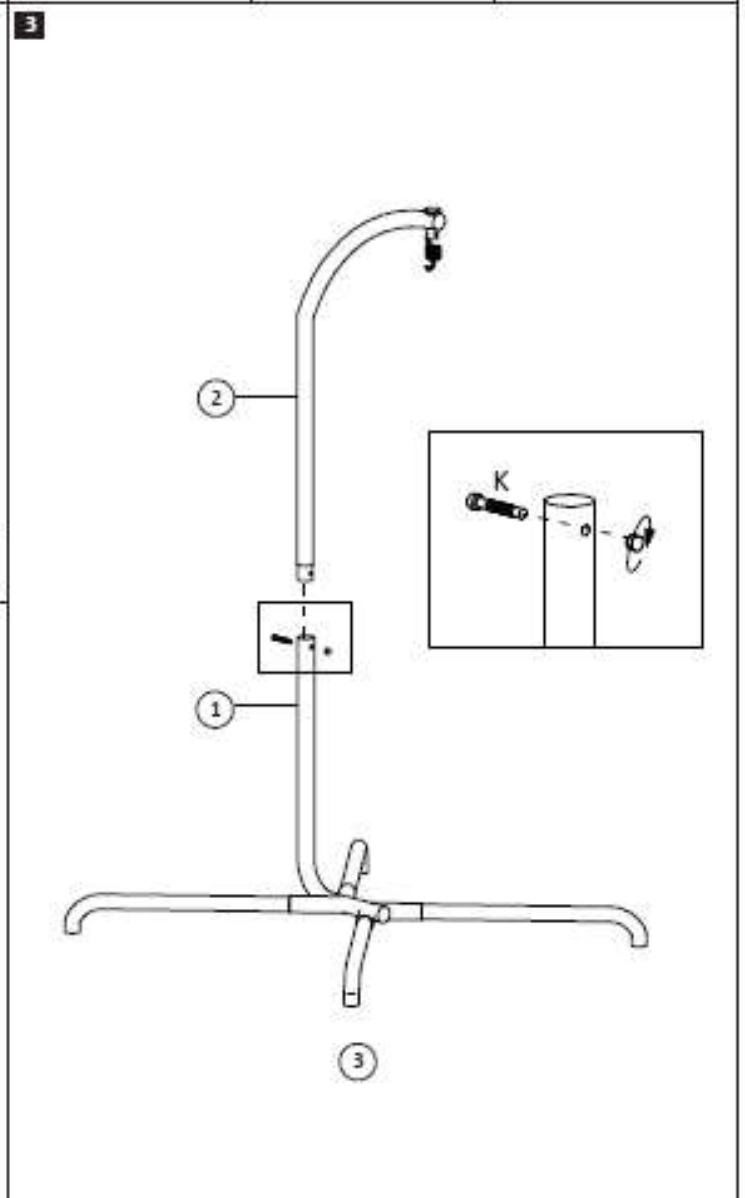
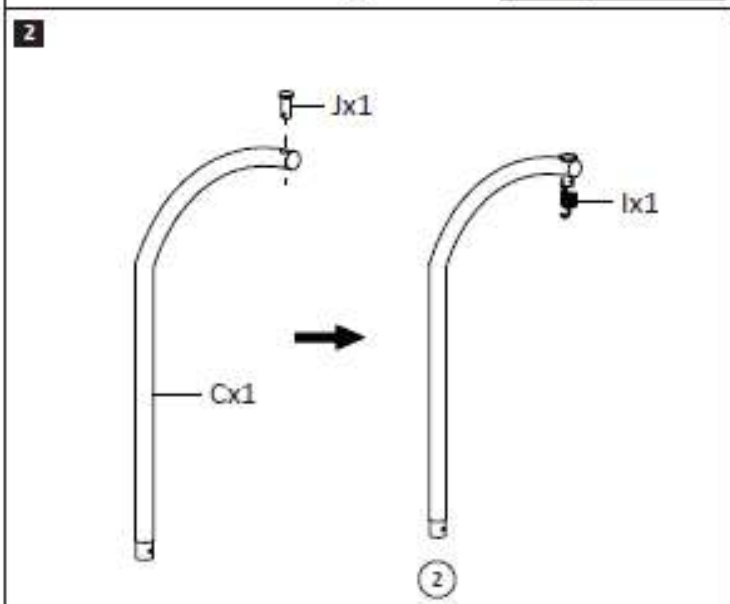
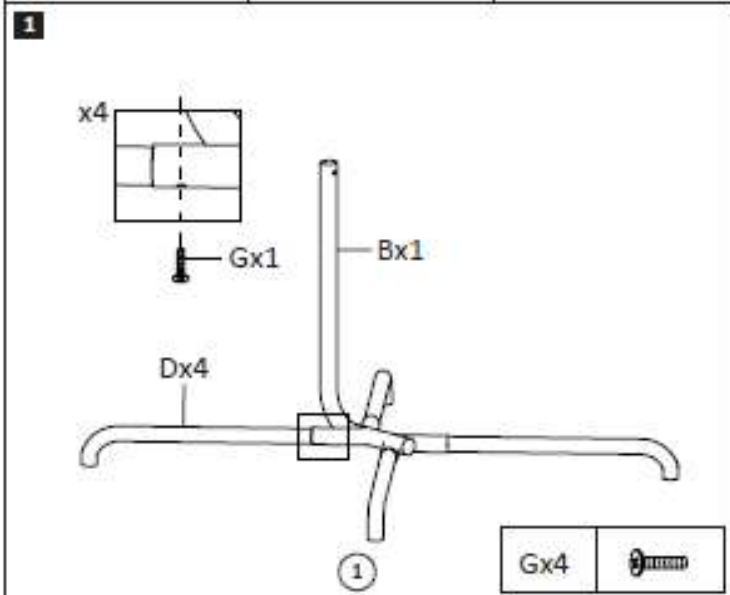
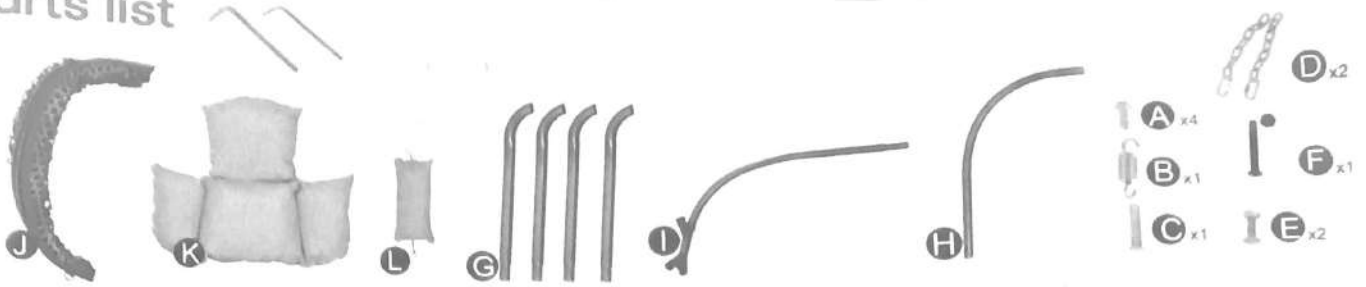


Ax1 	Bx1 	Cx1 	Dx4 	Ex1 	Fx1 
Gx5 		Ix1 	Jx1 	Kx1 	Lx3 
					




Parts list




STEP 1

Find the corresponding slots and secure them with screws.

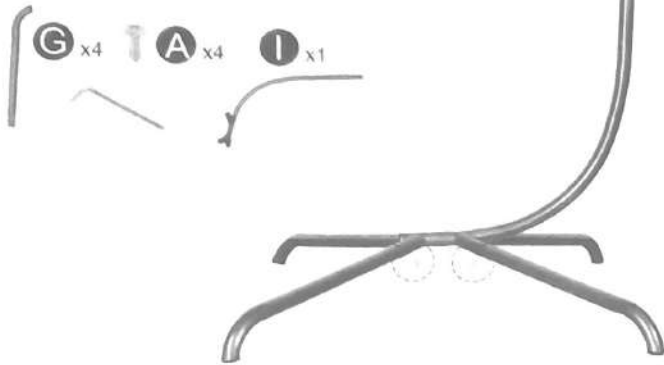

STEP 2

Here, you'll need two wrenches —one wrench to hold the screw in place and the other to fasten the screw.

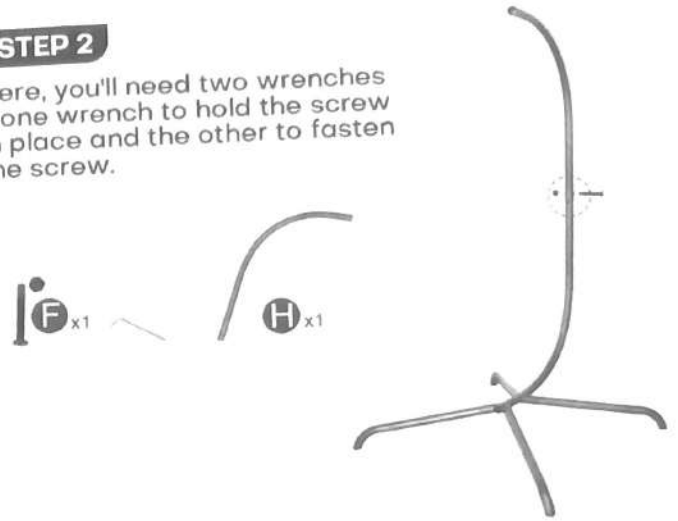

STEP 3

Unfold the chair with force and connect with F.

When installing the screws F on the tow ends of the chairs, use a wrench to tighten them little by little.



STEP 4

Connect the chair using two chains.

