


1. Insert the adjuster into the ball joint adapter



2. Insert the ball into the socket at the back of bracket and tighten.

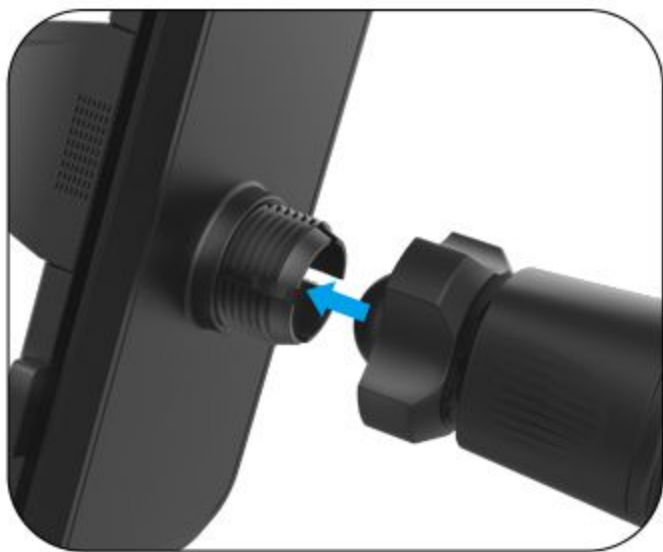

3. Clockwise tighten the knob.



4. Put your device into bracket then grip.