



Step 1 of 7: Opening the mowing head

Open the mowing head by pressing sideways on the indentation cut-outs in the top casing. Then remove the base from the mowing head. First press one side inward until the catch disengages, then press the other side. Then remove the cover of the mowing head.















Step 2 of 7: Removing the spool

Twist the spool slightly so that the plastic hook is exposed and then remove it from the top casing.











Step 3 of 7: Rewinding the line

Take two lines, each with a maximum length of 7 m or 10 m depending on the line (see the enclosed information sheet for the maximum line length). Insert the end of one line in one of the eyes of the spool and wind on the line according to the indicated direction of winding. Please make certain that the line is wound on evenly and tightly. Insert the end of the line in one of the openings on the spool.



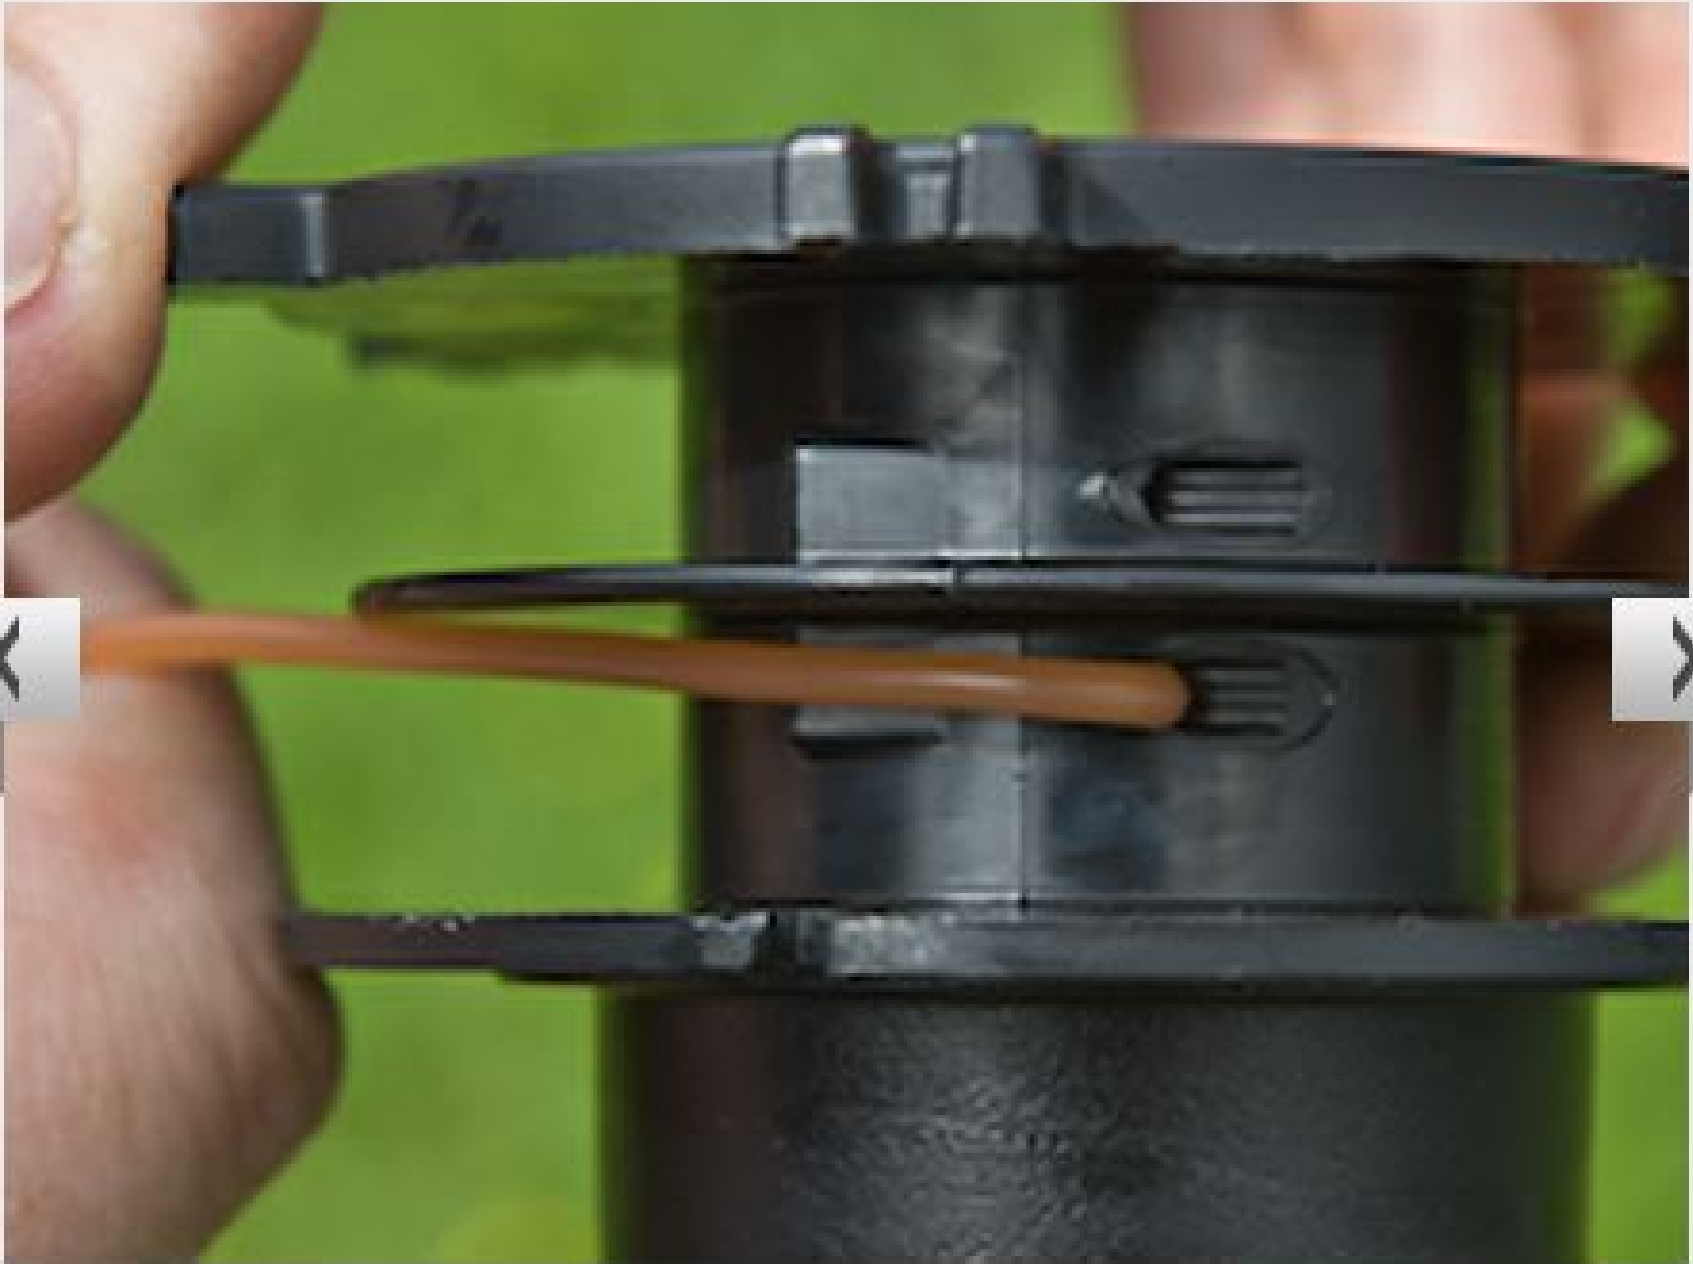



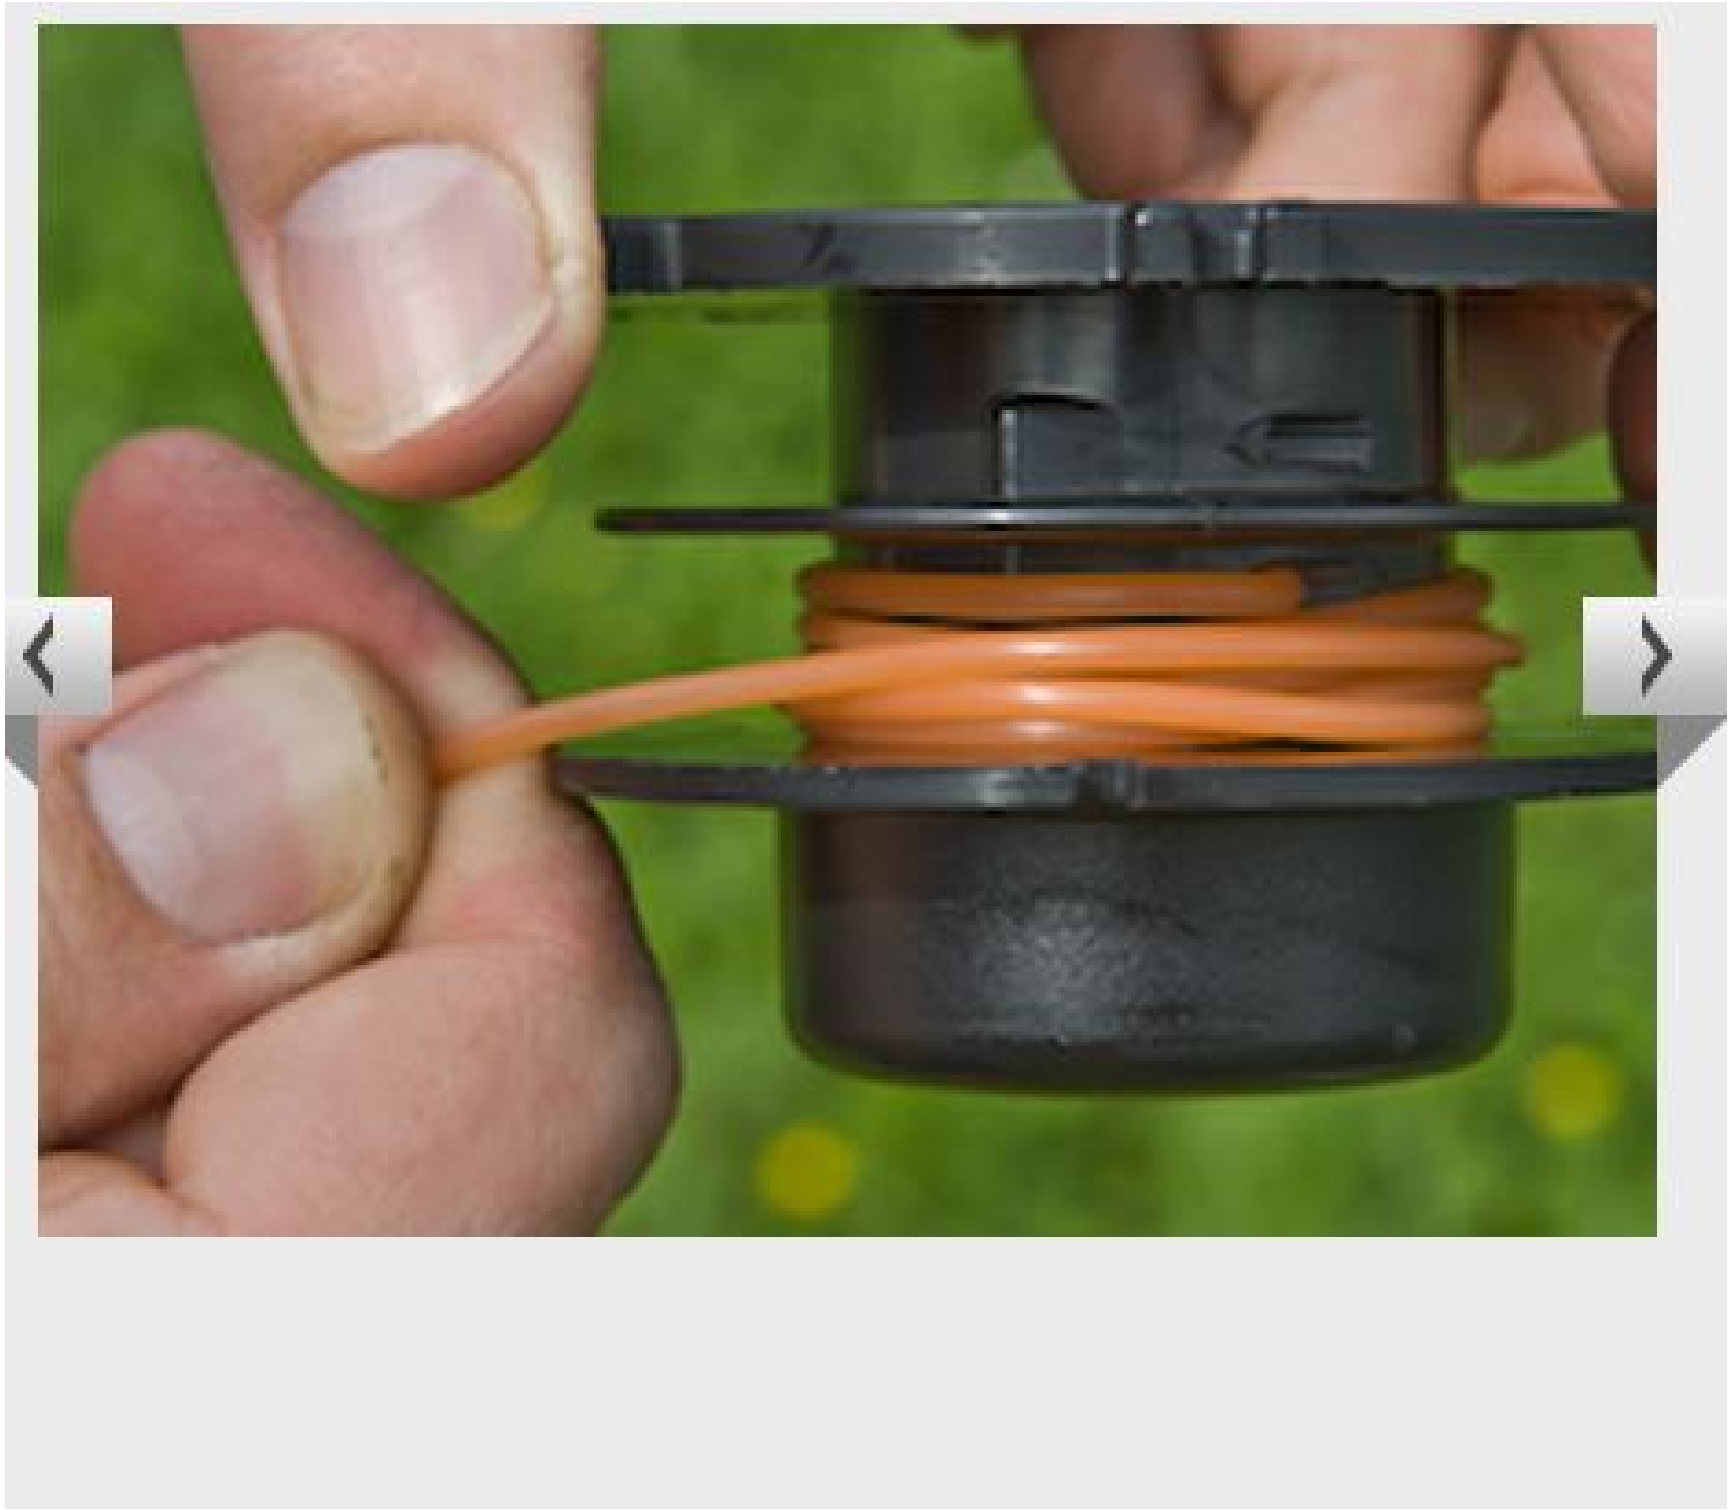







Step 4 of 7: Winding on the second line

Now fill the second chamber by repeating step 3. Insert the end of the second line in the opposite side of the spool.



Step 5 of 7: Inserting the spool

Now insert the spool into the top casing. Remove the ends of the lines from the openings in the spool and place them in the groove provided in the mowing head.



Step 6 of 7: Closing the mowing head

Now clip the base into the mowing head.



Step 7 of 7: Shortening the ends of the line

Shorten the ends of the line so that approx. 10 cm protrude from the opening on each side.