


Technical Drawing

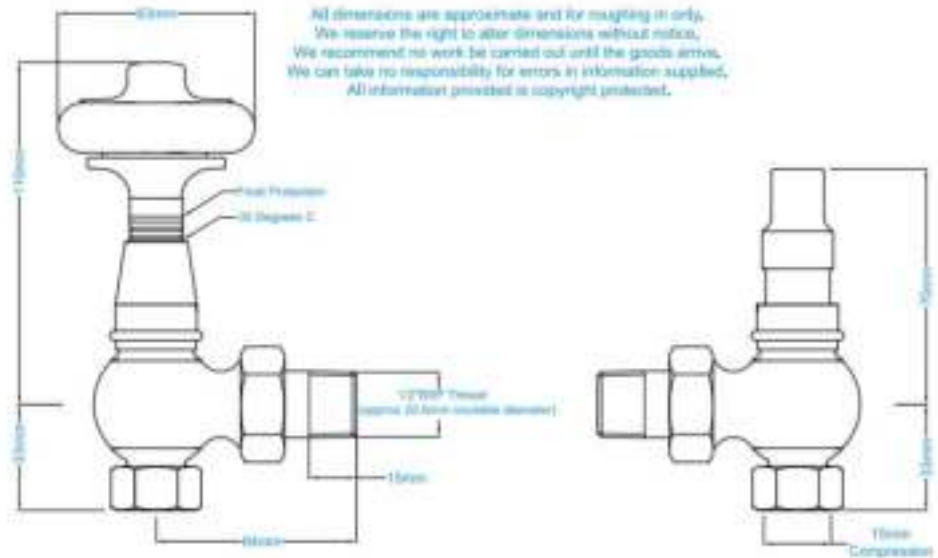

All dimensions are approximate and for mapping in only.
We reserve the right to alter dimensions without notice.
We recommend no work be carried out until the goods arrive.
We can take no responsibility for errors in information supplied.
All information provided is copyright protected.

Finish Available

- Chrome
- Satin Nickel
- Black Nickel
- Antique Brass

Valve Connections

- Valve to Radiator – 1/2" BSPT
- Valve to Pipe – 15mm Compression

Heating System Connection – we recommend that:

- Thermostatic radiator valve is connected to the flow
- Lock shield valve is connected to the return

Pressure Drop Value (Kvs) = 1.6

Kvs value is the metric measure for the flow of a fully opened valve. It is defined as: The volume flow in cubic metres per hour of water at a temperature of between 5° and 40° celsius with a pressure drop across the valve of 1bar.



Lock shield valve

Manual radiator valve

Finish Available

- Chrome
- Satin Nickel
- Black Nickel
- Antique Brass

Valve Connections

- Valve to Radiator – 1/2" BSPT
- Valve to Pipe – 15mm Compression

Heating System Connection – we recommend that:

- Thermostatic radiator valve is connected to the flow
- Lock shield valve is connected to the return

Pressure Drop Value (Kvs) = 1.5

Kvs value is the metric measure for the flow of a fully opened valve. It is defined as: The volume flow in cubic metres per hour of water at a temperature of between 5° and 40° celsius with a pressure drop across the valve of 1bar.



Lock shield valve

Thermostatic radiator valve