

Operation temperature: 10.0°C~40.0°C (50.0°F~104.0°F),
relative maximum humidity 15%RH~

Atmospheric pressure: 70kPa~106kPa


Transportation/storage temperature: -25°C~55°C (-13°F~13°F)
relative maximum humidity 15%RH~

Atmospheric pressure: 50kPa~106kPa

Automatically shut down: if no operation for 30 seconds, it will

Period of use: five years

Battery: two pieces of 1.5V AAA batteries (alkaline batteries)

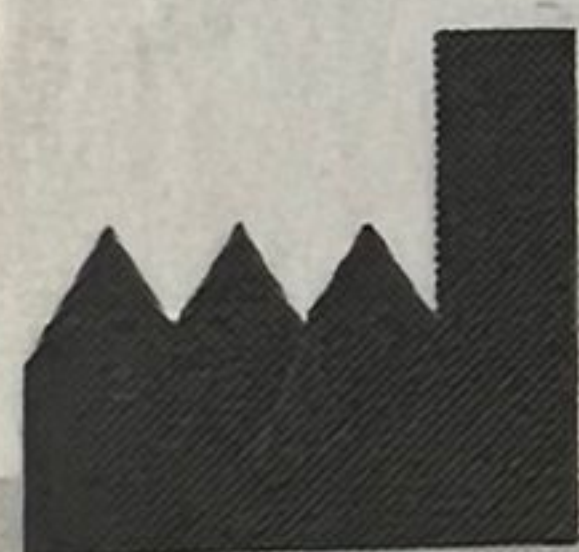

Shenzhen Pango Electronic Co., Ltd

Main Site: No.25 1st Industry Zone, Fenghuang Road, Xikeng
Longgang District, Shenzhen, Guangdong China


Additional site1: 2-4 Floor, No.5 Shanzhuang Rd., Xikeng
Longgang District, Shenzhen City, Guangdong Province, China

Tel: 86-0755-33825988

Fax: 86-0755-33825989

P.C.: 518115

Web: <http://www.pan-go.com>

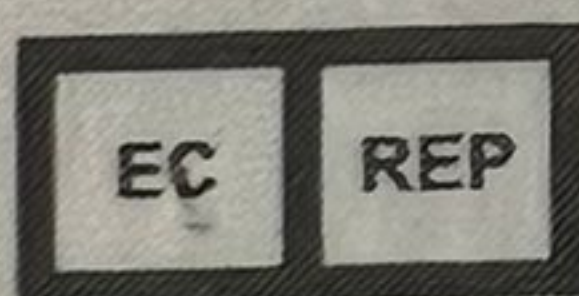

Authorised representative: Lotus NL B.V.

Address: Koningin Julianaplein 10, 1e Verd, 2595AA, The Hague

Tel: +31645171879 (English), +31626669008 (Dutch)



(01)6948423808824(10)2005023
Made in China