



HUACETONG

Shenzhen Huacetong Testing and Certification Co., LTD.
Web: www.szcttlab.com Tel: 86-755-23592524

TEST REPORT

EN 55032 Electromagnetic compatibility of multimedia equipment - Emission Requirements
EN 55035 Information technology equipment - Immunity characteristics - Limits and methods of measurement
EMC Directive2014/30/EU

Report Reference No..... WUX202003020268E

Compiled by
(position+printed name+signature)...: File administrators Judy Chan *Judy Chan*

Supervised by
(position+printed name+signature)...: Technique principal Andy Liu *Andy Liu*

Approved by
(position+printed name+signature)...: Manager Tony Bi *Tony Bi*

Date of issue..... Mar. 06, 2020

Testing location/ procedure..... Full application of Harmonised standards
 Partial application of Harmonised standards
 Other standard testing methods

Applicant's name..... Dongguan kuzhu Electronic Co., Ltd

Address..... B2-3, floor 2, No.5, Zhouxi Avenue, Nancheng street, Dongguan City

Manufacturer..... Dongguan South city Changxie Electronic products factory

Address..... 201, floor 2, No. 15, Yinshan Road, yuanwubian community, Nancheng street, Dongguan City

Test specification:

Standard..... EN 55032:2015; EN 55035:2017
 EN 61000-3-2: 2014; EN 61000-3-3: 2013

Test item description..... Electronic scale

Model No..... CX-SERIES

Listed Models..... CX-SCALE, CX.WET, KM, MT, I2000, DM3,CX-118,CX-128, CX-138, CX-158, CX-160, CX-168, CX-188, CX-198,CX-201,CX-218, CX-228,CX-238,CX-258,CX-268,CX-286, CX-288,CX-298,CX-311, CX-318,CX-328SERIES,CX-333,CX-338,CX-358,CX-368,CX-398, CX-50,CX-501,CX-518,CX-558,CX-568,CX-598,CX-555,CX-618, CX-638,CX-658,CX-668,CX-666,CX-688,CX-808,CX-818,CX-888, CX-886,CX-918,CX-928,CX-938,CX-958,CX-999,CX-968,CX-911, CX-2012,CX-2017,CX-2018,CX-2020, A01,A02, A03, A04, A05, A06,A07, A08, A09, A10

Trade Mark..... CHANGXIE/长协电子

Ratings..... DC 3V~15mA,50mw

Result..... **Positive**

EMC Test Report

Test Report No. :	WUX202003020268E	Mar. 06, 2020
		Date of issue

Equipment under Test : Electronic scale

Model /Type : CX-SERIES

Listed Models : CX-SCALE, CX.WET, KM, MT, I2000, DM3,CX-118,CX-128, CX-138, CX-158, CX-160, CX-168, CX-188, CX-198,CX-201, CX-218,CX-228,CX-238,CX-258,CX-268,CX-286, CX-288, CX-298,CX-311,CX-318,CX-328SERIES,CX-333,CX-338, CX-358,CX-368,CX-398,CX-50,CX-501,CX-518,CX-558,CX568, CX-598,CX-555,CX-618,CX-638,CX-658,CX-668,CX-666,CX-688, CX-808,CX-818,CX-888,CX-886,CX-918,CX-928,CX-938,CX-958, CX-999,CX-968,CX-911,CX-2012,CX-2017,CX-2018,CX-2020, A01, A02, A03, A04, A05, A06,A07, A08, A09, A10

Applicant : Dongguan kuzhu Electronic Co., Ltd

Address : B2-3, floor 2, No.5, Zhouxi Avenue, Nancheng street, Dongguan City

Manufacturer : Dongguan South city Changxie Electronic products factory

Address : 201, floor 2, No. 15, Yinshan Road, yuanwubian community, Nancheng street, Dongguan City

Test Result according to the standards on page 4:	Positive
----------------------------------------------------------	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks:.....	5
2.2. Equipment Under Test.....	5
2.3. Short description of the Equipment under Test (EUT).....	5
2.4. EUT operation mode:.....	5
2.5. EUT configuration:.....	6
2.6. Performance Criteria.....	6
3. TEST ENVIRONMENT	7
3.1. Address of the test laboratory.....	7
3.2. Test Facility.....	7
3.3. Environmental conditions.....	7
3.4. Test Description.....	8
3.5. Statement of the measurement uncertainty.....	8
3.6. Equipments Used during the Test.....	9
4. TEST CONDITIONS AND RESULTS	11
4.1. Radiated Emission.....	11
4.2. Conducted disturbance.....	14
4.3. Harmonic current.....	14
4.4. Voltage Fluctuation and Flicker.....	14
4.5. Electrostatic discharge.....	14
4.6. Radiated, radio-frequency, electromagnetic field.....	16
4.7. Electrical fast transients / Burst.....	17
4.8. Surge.....	17
4.9. Conducted disturbances induced by radio-frequency fields.....	17
4.10. Magnetic Field Immunity.....	17
4.11. Voltage Dips and Interruptions.....	17
5. PHOTOS OF the EUT	18

1. TEST STANDARDS

The tests were performed according to following standards:

[EN 55032: 2015](#) Electromagnetic compatibility of multimedia equipment - Emission Requirements

[EN 55035:2017](#) Information technology equipment – Immunity characteristics – Limits

[EN 61000-3-2: 2014](#) Electromagnetic compatibility (EMC) -- Part 3-2: Limits - Limits for harmonic current emissions (equipment input current up to and including 16 A per phase)

[EN 61000-3-3:2013](#) Electromagnetic compatibility (EMC) -- Part 3-3: Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection

2. SUMMARY

1.1. General Remarks:

Date of receipt of test sample : Mar. 02, 2020

Testing commenced on : Mar. 05, 2020

Testing concluded on : Mar. 06, 2020

1.2. Equipment Under Test

Power supply system utilised

Power supply voltage : 230V / 50 Hz 115V / 60Hz
 3 V DC 5 V DC
 Other (specified in blank below)

/

1.3. Short description of the Equipment under Test (EUT)

Insert: Usage of Machine, Place it will be used, Functions
The EUT is Electronic scale

Series number: CX-SERIES

1.4. EUT operation mode:

The equipment under test was operated during the measurement under the following conditions:

The tests are carried out with surge protective devices disconnected.

Test progElectronic scale (customer specific)

Emissions tests.....: According to EN55032, searching for the highest disturbance.

Immunity tests: According to EN55035, searching for the highest susceptibility.

Harmonics current..... : According to EN 61000-3-2, searching for the highest disturbance.

Voltage fluctuation..... : According to EN 61000-3-3, searching for the highest disturbance.

1.5. EUT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurement:

■- supplied by the manufacturer

o - supplied by the lab

1.6. Performance Criteria

Definition related to the performance level:

- based on the used product standard
- based on the declaration of the manufacturer, requestor or purchaser

Criterion A:

Definition: normal performance within limits specified by the manufacturer, requestor or purchaser:

The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Criterion B:

Definition: temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the equipment under test recovers its normal performance, without operator intervention:

The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Criterion C:

Definition: temporary loss of function or degradation of performance, the correction of which requires operator intervention:

Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

3. TEST ENVIRONMENT

1.7. Address of the test laboratory

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd

Electronic detection of building, Shahe West Road, Xili Town, Nanshan, Shenzhen, China.

There is one 3m semi-anechoic chamber and two line conducted labs for final test.

The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55032 requirements.

1.8. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 7631A

The 3m alternate test site of CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2011.

FCC-Registration No.: 338263

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.

1.9. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 22-25 ° C

Humidity: 40-54 %

Atmospheric pressure: 950-1050mbar

1.10. Test Description

Emission Measurement		
Radiated Emission	EN 55032:2015	PASS
Conduction Emission	EN 55032:2015	N/A
Harmonic Current	EN 61000-3-2: 2014	N/A
Voltage Fluctuation and Flicker	EN 61000-3-3: 2013	N/A
Immunity Measurement		
Electrostatic Discharge	EN 55035:2017 IEC 61000-4-2: 2008	PASS
RF Field Strength Susceptibility	EN 55035:2017 IEC 61000-4-3: 2010	PASS
Electrical Fast Transient/Burst Test	EN 55035:2017 IEC 61000-4-4: 2012	N/A
Surge Test	EN 55035:2017 IEC 61000-4-5: 2005	N/A
Conducted Susceptibility Test	EN 55035:2017 IEC 61000-4-6: 2008	N/A
Power Frequency Magnetic Field Susceptibility Test	EN 55035:2017 IEC 61000-4-8: 2009	N/A
Voltage Dips and Interruptions Test	EN 55035:2017 IEC 61000-4-11: 2004	N/A

Remark: The test result PASS and /or FAIL has no relationship with the measurement uncertainty.

1.11. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar

to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for SET laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	±4.22dB	(1)
Conducted Emission	0.15~30MHz	±3.29dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.12. Equipments Used during the Test

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA-BROADBAND ANTENNA	ROHDE & SCHWARZ	HL562	100015	2019/06
2	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESI 26	100009	2019/06
3	RF TEST PANEL	ROHDE & SCHWARZ	TS / RSP	335015/ 0017	2019/06
4	TURNTABLE	ETS	2088	2149	2019/06
5	ANTENNA MAST	ETS	2075	2346	2019/06
6	EMI TEST SOFTWARE	ROHDE & SCHWARZ	ESK1	N/A	2019/06

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100038	2019/06
2	Artificial Mains	ROHDE & SCHWARZ	ESH2-Z5	100028	2019/06
3	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100044	2019/06
4	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2019/06

Harmonic Current					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Purified Power Source	CALIFORNIA INSTRUMENTS	HFS500	54513	2019/06
2	Harmonic And Flicker Analyzer	EM TEST	DPA503S1	0500-10	2019/06

Voltage Fluctuation and Flicker					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Purified Power Source	CALIFORNIA INSTRUMENTS	HFS500	54513	2019/06
2	Harmonic And Flicker Analyzer	EM TEST	DPA503S1	0500-10	2019/06

Electrostatic Discharge					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ESD Simulator	EM TEST	DITOC0103Z	0301-04	2019/06

RF Field Strength Susceptibility					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	SIGNAL GENERATOR	IFR	2032	203002/100	2019/06
2	AMPLIFIER	AR	150W1000	301584	2019/06
3	DUAL DIRECTIONAL COUPLER	AR	DC6080	301508	2019/06

4	POWER HEAD	AR	PH2000	301193	2019/06
5	POWER METER	AR	PM2002	302799	2019/06

Electrical Fast Transient/Burst

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Ultra Compact Simulator	EM TEST	UCS500M6	0500-19	2019/06

Surge

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA COMPACT SIMULATOR	EM TEST	UCS500M6	0500-19	2019/06

Conducted Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Signal Generator	IFR	2023A	202304/060	2019/06
2	Amplifier	AR	75A250	302205	2019/06
3	Dual Directional Coupler	AR	DC2600	302389	2019/06
4	6db Attenuator	EMTEST	ATT6/75	0010230A	2019/06
5	EM CLAMP	LÜTHI	EM101	335625	2019/06
6	CDN	EMTEST	CDN M3	0802-03	2019/06

Power Frequency Magnetic Field Susceptibility

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	ULTRA COMPACT SIMULATOR	EM TEST	UCS500M6	202304/060	2019/06
2	MOTOR DRIVEN VOLTAGE TRANSFORMER	EM TEST	MV2616	302205	2019/06
3	CURRENT TRANSFORMER	EM TEST	MC2630	302389	2019/06
4	MAGNETIC COIL	EM TEST	MS100	0010230A	2019/06

Voltage Dips and Interruptions

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Ultra Compact Simulator	EM TEST	UCS500M6	0500-19	2019/06
2	Motor Driven Voltage Transformer	EM TEST	MV2616	0301-11	2019/06

4. TEST CONDITIONS AND RESULTS

1.13. Radiated Emission

For test instruments and accessories used see section 3.6.

1.13.1. Description of the test location

Test location: Shielded room No. 2

1.13.2. Limits of disturbance(EN55032 B)

Frequency (MHz)	Distance (Meters)	Field Strengths Limits (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note: (1) The tighter limit shall apply at the edge between two frequency bands.


(2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.

1.13.3. Description of the test set-up

1.13.3.1. Operating Condition

The EUT is set to work shall be carried out with full load mode during the test, and the maximum emanating results are recorded.

1.13.3.2. Configuration of test setup

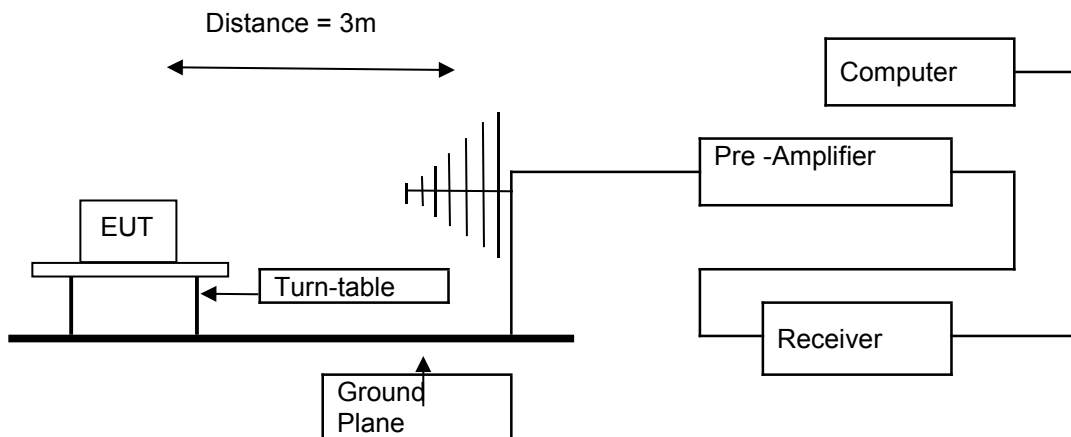

1.13.4. Test result

The requirements are **Fulfilled**


Band Width: 120KHz

Frequency Range: 30MHz to 1000MHz

Remarks: The limits are kept. For detailed results, please see the following page(s).

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	5.0 ms	100 kHz	VULB9163 NEW

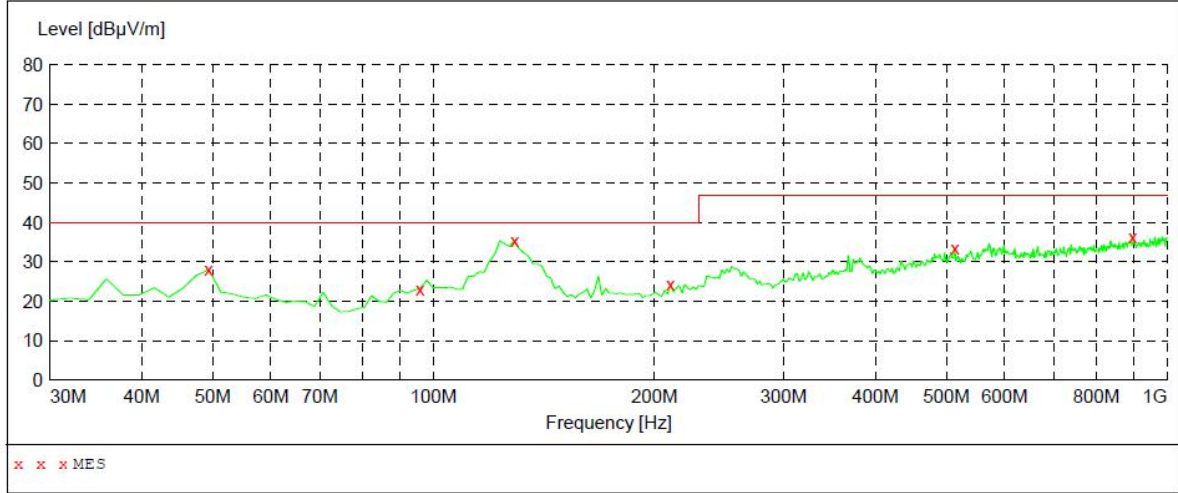


MEASUREMENT RESULT:

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
49.400000	28.10	15.8	40.0	11.9	---	100.0	0.00	VERTICAL
95.960000	23.20	17.2	40.0	16.8	---	100.0	0.00	VERTICAL
128.940000	35.50	13.2	40.0	4.5	---	100.0	0.00	VERTICAL
210.420000	24.30	15.1	40.0	15.7	---	100.0	0.00	VERTICAL
513.060000	33.40	24.2	47.0	13.6	---	100.0	0.00	VERTICAL
897.180000	36.50	29.2	47.0	10.5	---	100.0	0.00	VERTICAL

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	5.0 ms	100 kHz	VULB9163 NEW

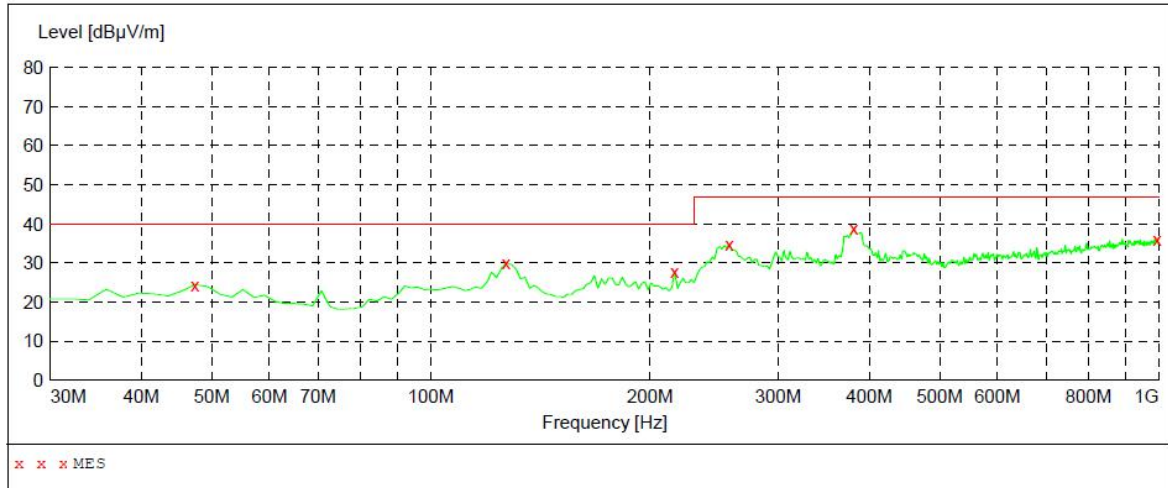

MEASUREMENT RESULT:

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	24.50	15.8	40.0	15.5	---	300.0	0.00	HORIZONTAL
127.000000	30.00	13.5	40.0	10.0	---	300.0	0.00	HORIZONTAL
216.240000	27.90	15.2	40.0	12.1	---	100.0	0.00	HORIZONTAL
256.980000	34.90	17.3	47.0	12.1	---	100.0	0.00	HORIZONTAL
381.140000	38.90	20.9	47.0	8.1	---	100.0	0.00	HORIZONTAL
994.180000	36.20	29.9	47.0	10.8	---	300.0	0.00	HORIZONTAL

1.14. Conducted disturbance

The test is not applicable.

1.15. Harmonic current

The test is not applicable.

1.16. Voltage Fluctuation and Flicker

The test is not applicable.

1.17. Electrostatic discharge

For test instruments and accessories used see section 3.6.

1.17.1. Description of the test location and date

Test location: Shielded room No. 3

Date of test: Mar. 05, 2020

Operator: Andy

1.17.2. Severity levels of electrostatic discharge


Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1	2	2
2	4	4
3	6	8
4	8	15
X	Special	Special

1.17.3. Description of the test set-up

1.17.3.1. Operating Condition

The EUT is set to work shall be carried out with normal working mode during the test, and the maximum emanating results are recorded.

1.17.3.2. Configuration of test setup

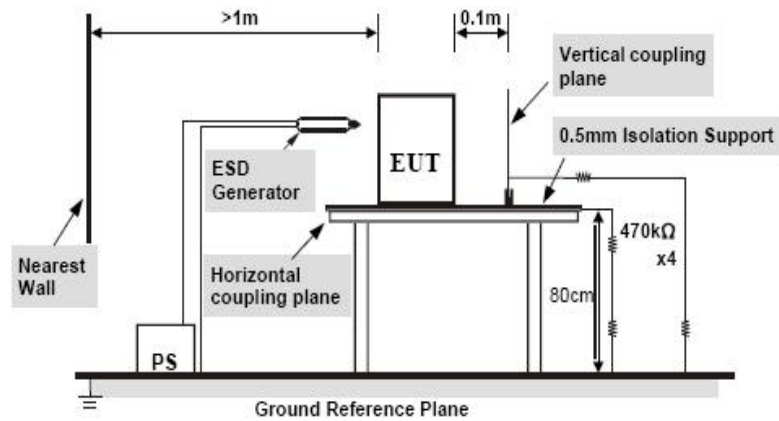

1.17.4. Test specification:

Contact discharge voltage:

- 2 kV
- 4 kV

Air discharge voltage:

- 2 kV
- 4 kV
- 8 kV

Number of discharges:

- ≥ 10
- ≥ 25

Type of discharge:

- Direct discharge
 - Air discharge
 - Contact discharge
- Indirect discharge
 - Contact discharge

Polarity:

- Positive
- Negative

Discharge location:

- see photo documentation of the test set-up
- all external locations accessible by hand
- horizontal plate (HCP)
- vertical coupling plate (VCP)

1.17.5. Test result

The requirements are **Fulfilled**

Performance Criterion: **B**

Remarks: During the test no deviation was detected to the selected operation mode(s).

1.18. Radiated, radio-frequency, electromagnetic field

For test instruments and accessories used see section 3.6.

1.18.1. Description of the test location and date

Test location: Shielded room No. 2

Date of test: Mar. 05, 2020

Operator: Andy

1.18.2. Severity levels of radiated, radio-frequency, electromagnetic field


Level	Field Strength (V/m)
1.	1
2.	3
3.	10
X	Special

1.18.3. Description of the test set-up

1.18.3.1. Operating Condition

The EUT is set to work shall be carried out normal working mode during the test, and the maximum emanating results are recorded.

1.18.3.2. Configuration of test setup

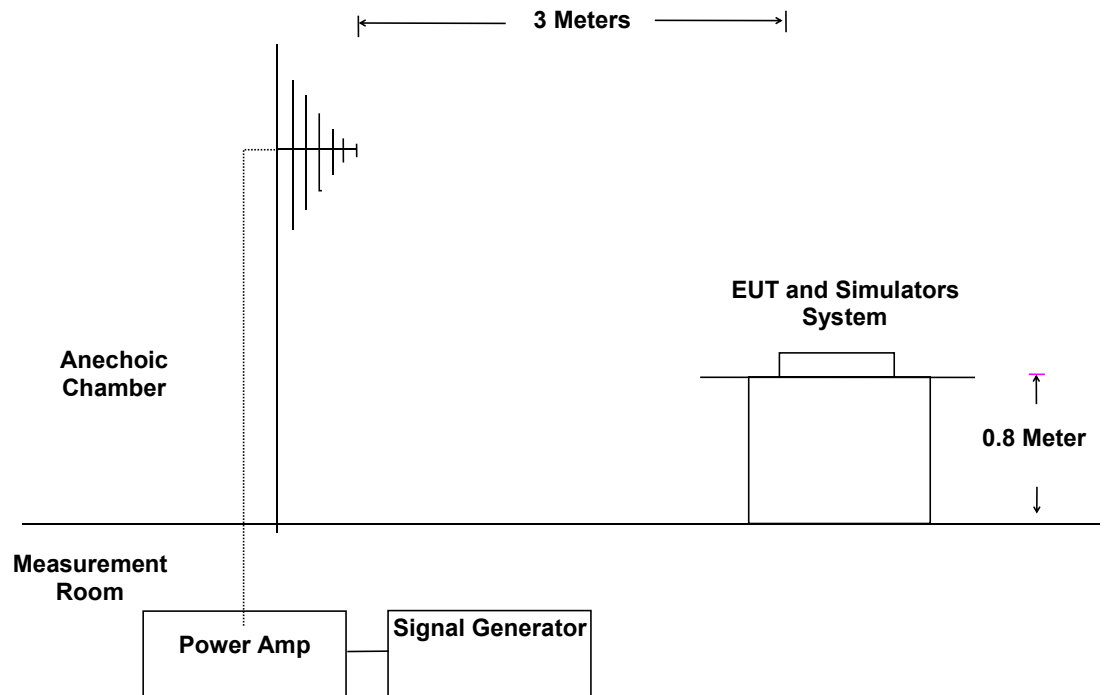

1.18.4. Test specification:

<u>Frequency range:</u>	■ 110MHz to 205 MHz
<u>Field strength:</u>	■ 3 V/m
<u>EUT - antenna separation:</u>	■ 3 m
<u>Modulation:</u>	■ AM: 80 % ■ sinusoidal 1000Hz
<u>Frequency step:</u>	■ 1 % with 3 s dwell time
<u>Antenna polarisation:</u>	■ horizontal ■ vertical

1.18.5. Test result

The requirements are **Fulfilled**

Performance Criterion: **A**

Remarks: During the test no deviation was detected to the selected operation mode(s).

1.19. Electrical fast transients / Burst

The test is not applicable.

1.20. Surge

The test is not applicable.

1.21. Conducted disturbances induced by radio-frequency fields

The test is not applicable.


1.22. Magnetic Field Immunity



The test is not applicable.

1.23. Voltage Dips and Interruptions

The test is not applicable.

5. Photos of the EUT

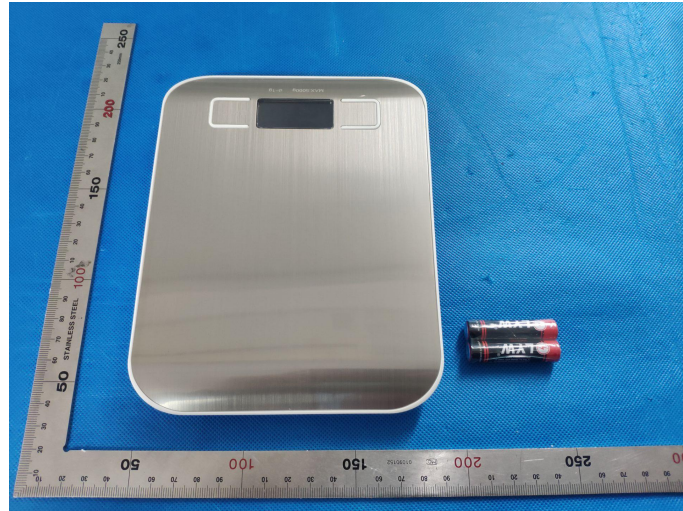

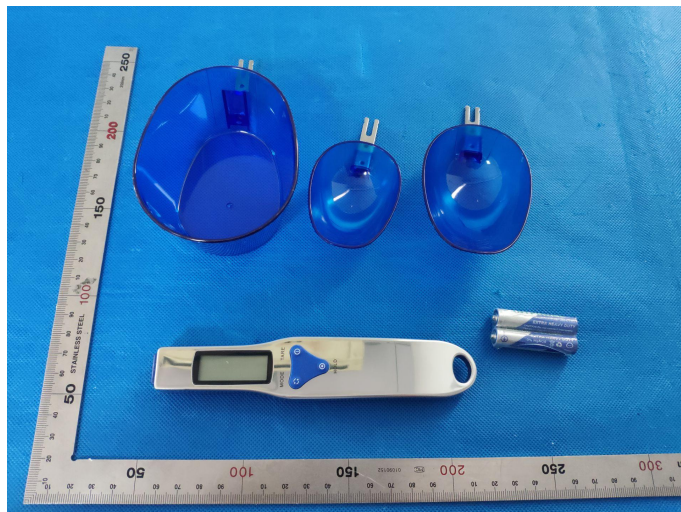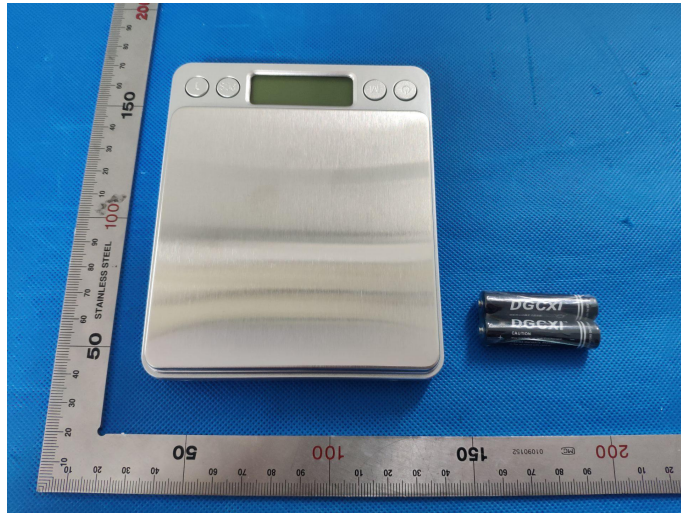

.....End of report.....