



27" IPS technology panel with height adjustable stand and 100Hz refresh rate


Stylish edge-to-edge design makes the ProLite XUB2793HSU perfect for multi-monitor set-ups. The IPS panel technology offers accurate and consistent colour reproduction with wide viewing angles. The 100Hz refresh rate together with FreeSync function provides an instant, tangible improvement in image smoothness. High contrast and brightness values mean the monitor will provide excellent performance for photographic and web design. Equipped with speakers, USB hub , headphone socket, HDMI and DisplayPort connections, a blue light reducer function to reduce eye fatigue and an ergonomic 150mm height adjustable stand for optimal user comfort, make this 27" monitor a great choice for both multi-monitor configuration and office applications.

Available also with fixed stand : [ProLite XU2793HSU-B6](#)



IPS Technology

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.



HAS (150mm) + PIVOT

With a height adjustable stand you will create an ergonomic work posture and position that meets all health and safety requirements. This will not only prevent any health issues but will also increase your productivity. The pivot function allows the screen to rotate from landscape to portrait orientation. This functionality can be useful if the application requires more height than width.

01 DISPLAY CHARACTERISTICS

| | |
|----------------------|---|
| Design | 3-side borderless |
| Diagonal | 27", 68.6cm |
| Panel | IPS panel technology LED, matte finish |
| Native resolution | 1920 x 1080 @100Hz (2.1 megapixel Full HD) |
| Aspect ratio | 16:9 |
| Panel brightness | 250 cd/m ² |
| Static contrast | 1000:1 |
| Advanced contrast | 80M:1 |
| Response time (MPRT) | 1ms |
| Viewing zone | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support | 16.7mIn (sRGB: 96%; NTSC: 72%) |
| Horizontal Sync | 30 - 110kHz |
| Viewable area W x H | 597.9 x 336.3mm, 23.5 x 13.2" |
| Pixel pitch | 0.311mm |
| Colour | matte, black |

02 INTERFACES / CONNECTORS / CONTROLS

| | |
|---------------------|---------------------------|
| Signal input | HDMI x1 DisplayPort x1 |
| USB HUB | x2 (v. 2.0 (DC5V, 500mA)) |
| HDCP | yes |
| Headphone connector | yes |

03 FEATURES

| | |
|--------------------|---|
| Blue light reducer | yes |
| Flicker free | yes |
| FreeSync support | yes |
| Extra | i-Style colour |
| OSD languages | EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL |
| Control buttons | Power, Menu, Up / Right / Volume, Down / Left / i-Style Colour, Input / Exit |
| User controls | picture adjust (brightness, contrast, Eco, ACR, OD, MBR, AMD FreeSync), colour settings (i-Style colour, blue light reducer, colour temp., user preset), OSD (OSD H. position, OSD V. position, OSD rotate, OSD time), language, recall, miscellaneous (sharp and soft, video mode adjust, opening logo, RGB range, LED, display information), input select (source), audio settings (volume, mute audio) |
| Speakers | 2 x 2W |
| Convenience | Kensington-lock™ prepared, DDC/CI, DDC2B, Mac OSX |

04 MECHANICAL

| | |
|------------------------------|---|
| Display position adjustments | height, swivel, tilt, pivot (rotation both sides) |
| Height adjustment | 150mm |
| Rotation (PIVOT function) | 90° |
| Swivel stand | 90°; 45° left; 45° right |
| Tilt angle | 23° up; 5° down |
| VESA mounting | 100 x 100mm |

Cable management system yes

05 ACCESSORIES INCLUDED

| | |
|--------|---------------------------------|
| Cables | power, USB, HDMI |
| Other | quick start guide, safety guide |

06 POWER MANAGEMENT

| | |
|-------------------|---|
| Power supply unit | internal |
| Power supply | AC 100 - 240V, 50/60Hz |
| Power usage | 22W typical, 0.5W stand by, 0.3W off mode |

07 SUSTAINABILITY

| | |
|-------------|---|
| Regulations | TCO Certified, CE, TÜV-Bauart, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, UKCA |
|-------------|---|

| | |
|---|---|
| Energy efficiency class (Regulation (EU) 2017/1369) | E |
|---|---|

| | |
|-------|---|
| EPEAT | *registration varies by country, go to www.epeat.net for details |
|-------|---|

| | |
|------------|------------------|
| REACH SVHC | above 0.1%: Lead |
|------------|------------------|

08 DIMENSIONS / WEIGHT


| | |
|------------------------------|---------------------------------|
| Product dimensions W x H x D | 611.5 x 400.5 (550.5) x 209.5mm |
|------------------------------|---------------------------------|

| | |
|--------------------------|-------------------|
| Box dimensions W x H x D | 691 x 447 x 142mm |
|--------------------------|-------------------|

| | |
|----------------------|-------|
| Weight (without box) | 5.4kg |
|----------------------|-------|

| | |
|-------------------|-------|
| Weight (with box) | 6.5kg |
|-------------------|-------|

| | |
|----------|---------------|
| EAN code | 4948570123063 |
|----------|---------------|

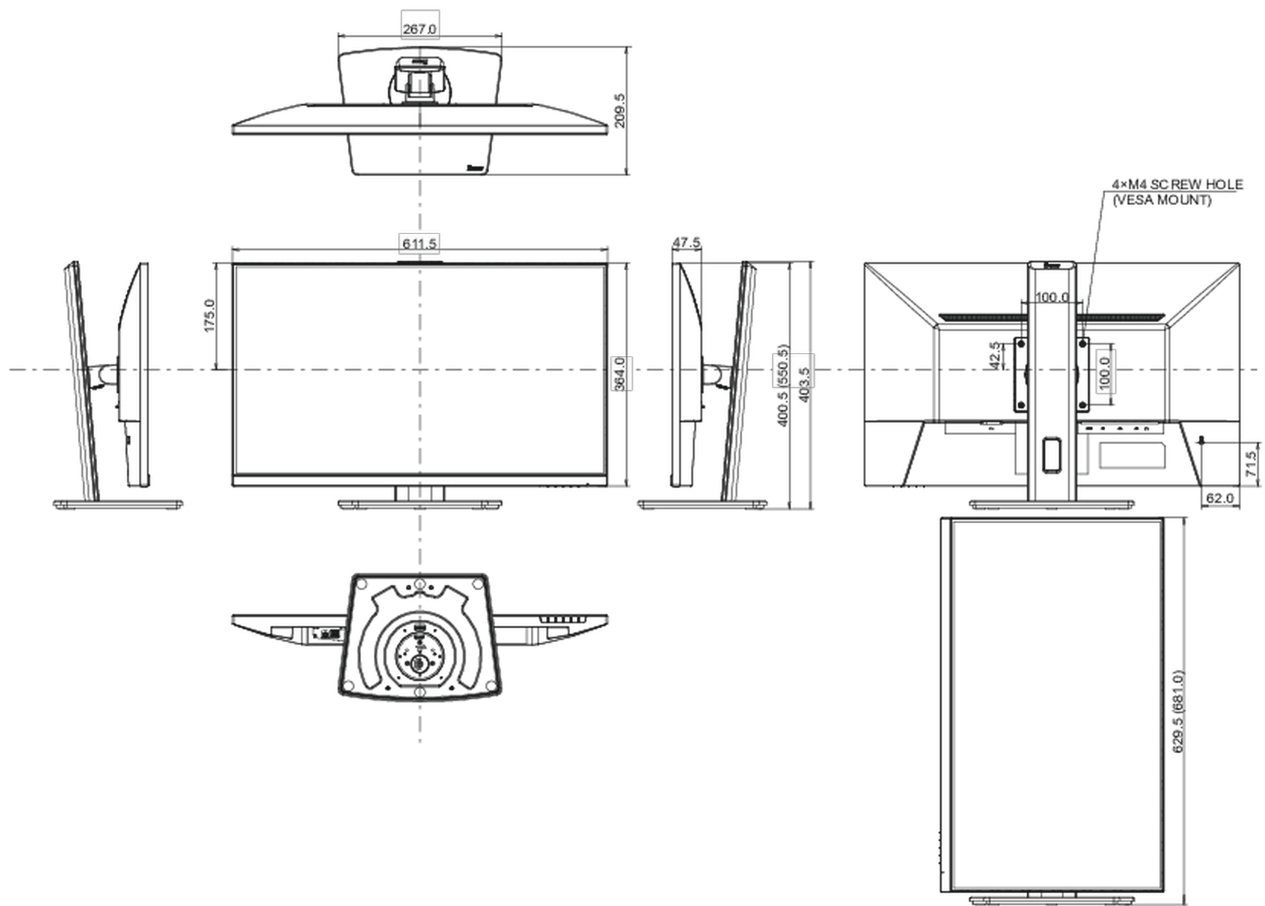

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED