



MASTER Value LEDtube T8



MAS LEDtube VLE 1200mm UO 15.5W 865 T8

MASTER Value, LEDtube, T8, EM/Mains, 1200 mm, 15.5 W, 36W TL-D, 6500 K, 2500 lm, CRI 80, 60000 hour(s)

A high-performance LED solution, the professional MASTER Value LED tube is ideal for replacing T8 fluorescent lamps using EM ballast or installing directly on the mains. This product provides an optimal combination of value and performance – for use in all general lighting, office, industry, retail, and hospitality applications. The unique design of this LED T8 tube light offers wide compatibility, safety and fast installation, as well as instant energy savings.

Product data

General Information		Color rendering index (CRI)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	LLMF At End Of Nominal Lifetime (Nom)	80
Nominal lifetime	60,000 hour(s)	Photobiological safety according to EN 62471	70 %
Switching Cycle	200,000		RG0
Lighting Technology	LEDtube	Operating and Electrical	
Flux measurement reference	Sphere	Line Frequency	50 to 60 Hz
Light Technical		Input Frequency	50 to 60 Hz
Color Code	865 [CCT of 6500K]	Power Consumption	15.5 W
Beam Angle (Nom)	190 degree(s)	Lamp Current (Max)	73 mA
Luminous Flux	2,500 lm	Lamp Current (Min)	67 mA
Color Designation	Cool Daylight	Starting Time (Nom)	0.5 s
Correlated Color Temperature (Nom)	6500 K	Warm-up time to 60% light	0.5 s
Luminous Efficacy (rated) (Nom)	161 lm/W	Power Factor (Fraction)	0.9
Color Consistency	<6	Voltage (Nom)	220-240 V
		LED alternative to fluorescent lamp power	36W TL-D

MASTER Value LEDtube T8

Inrush current at mains	8.2
Max. lamp no. on MCB B type 10A – Mains	90
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	95
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	15
Max. lamp no. on MCB B type 16A – Mains	145
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	150
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	25
Ballast Compatibility	EM/Mains

Temperature

T-Case Maximum (Nom)	60 °C
----------------------	-------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,200 mm
Bulb Shape	T8
Net Weight (Piece)	0.215 kg

Approval and Application


Energy Efficiency Class	C
-------------------------	---

Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	16 kWh
EPREL Registration Number	1095873
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) – Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 °C to 45 °C

Product Data

Order product name	MAS LEDtube VLE 1200mm UO 15.5W 865 T8
Full product name	MAS LEDtube VLE 1200mm UO 15.5W 865 T8
Full product code	871951431684300
Order code	929002997802
Material Nr. (12NC)	929002997802
Numerator – Quantity Per Pack	1
EAN/UPC – Product/Case	8719514316843
Numerator – Packs per outer box	10
EAN/UPC – Case	8719514316850


Dimensional drawing

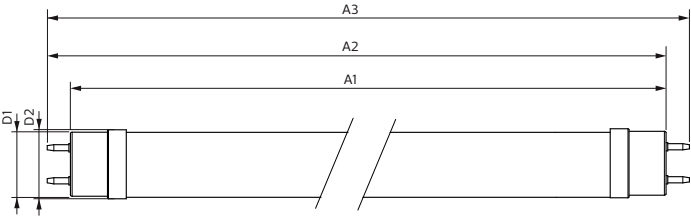


Product	D1	D2	A1	A2	A3
MAS LEDtube VLE 1200mm UO 15.5W 865 T8	25.8 mm	28 mm	1,198.2 mm	1,205.3 mm	1,212.4 mm

MASTER Value LEDtube T8


Photometric data

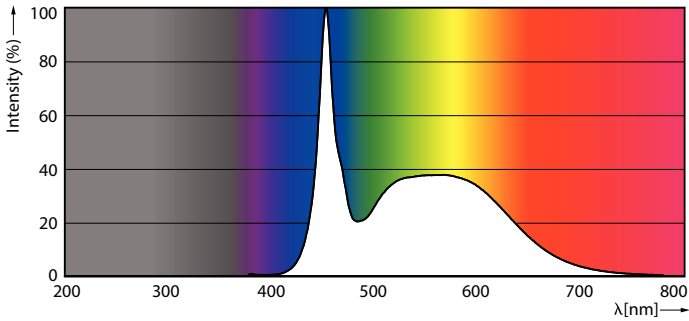

Spectral Power Distribution Colour - MAS LEDtube VLE 1200mm UO 15.5W 865 T8




General uniform lighting - MAS LEDtube VLE 1200mm UO 15.5W 865 T8




Light Distribution Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

Lifetime

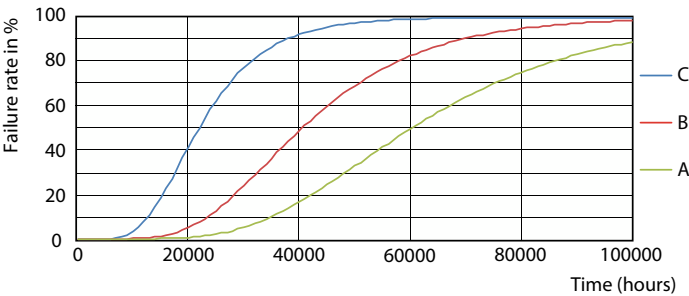



FailureRate

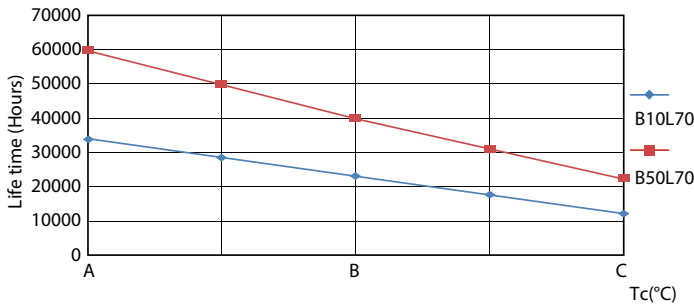

LifetimeVsTc


MASTER Value LEDtube T8

Lifetime

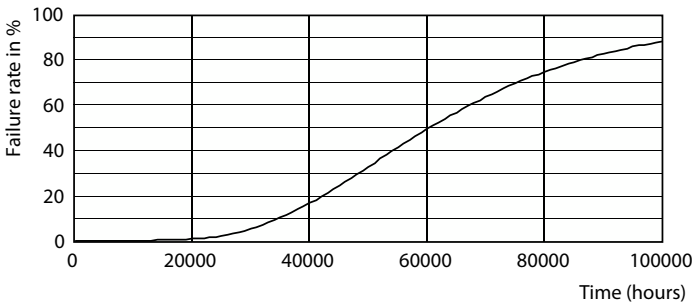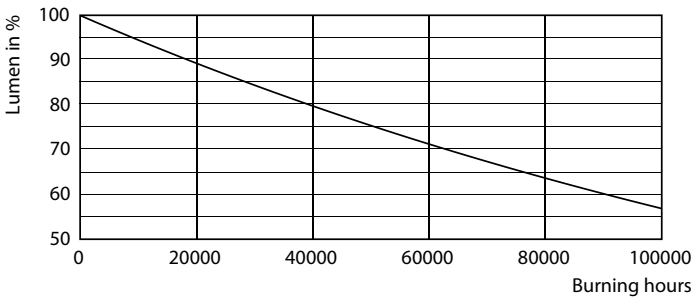

Lumen Maintenance Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

Life Expectancy Diagram

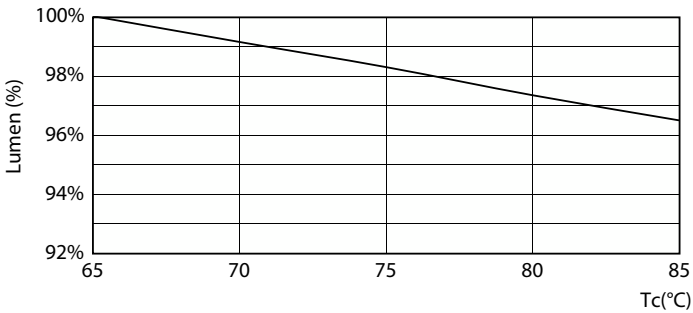

Lumen Maintenance Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

