


Multifunction Water Filters



Safe & Fresh Water - Everywhere

Structure Description

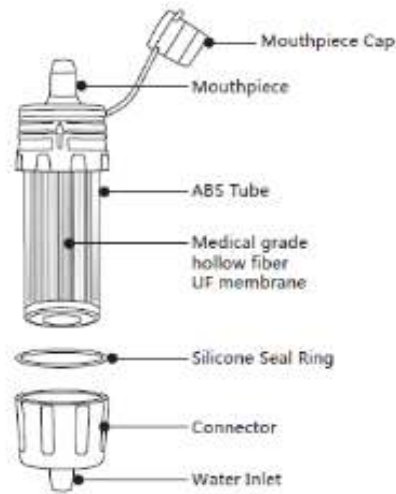


Technical Data

Multifunction Water Filters	
Lifespan:	5000L / 1320 Gallons
Flow Rate:	800ml/min
Best Filter Accuracy:	0.01 micron
Suit Temperature:	32°F-90°F 0°C-32°C
Net Weight:	52g
Material:	Food grade ABS, Silicone
Userful:	Outdoor river, lake, well water etc

Suck Water Directly


1. Put straw into water (4-8cm)
2. Blow air into the straw (exhaust air inside)
3. Suck water lightly. (suck water a few mouthfuls of water to avoid the bubble).
4. Blow straw after drinking, to keep it clean and prevent straw from clogging.

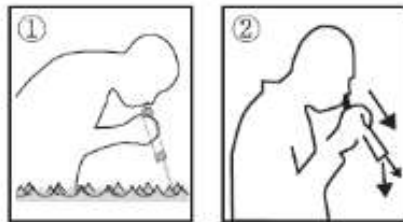

Warning: If you can't suck water or low flow, please blow straw before you drink.

Connect Bottles

Connect any standard bottle with dirty water to the straw, then squeeze the water into a cup.

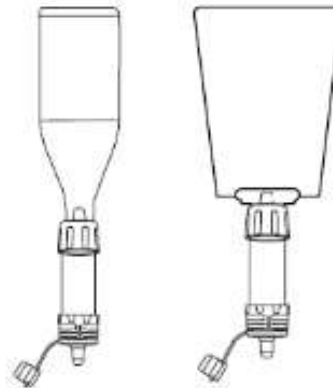

Connect Water Bags

1. Fill the bag with water. Full pour outlet tube by water from water bag in order to eliminate air in it.
2. Connect the straw. Hang up the water bag. Filter water will flow from filter tip.



Notice: Please make sure there is no air in the outlet tube before connecting straw. Air might block the water flowing from the outlet tube.