


LED LIGHTING
Votlage:165-260V 50-60Hz
IP=20 Ra:80



LED Driver
LOAD:SF12-24W
OUTPUT:36-85VDC 280
AC INPUT
INPUT:165-265VAC 50
Ta:-20...45°C Tc:65°C
CE F M

• Please do not hurt the surface layer and periphery of LED patch when installing punching holes, otherwise the light source may be damaged!!!
• At the same time, check whether all line terminal connections are in good contact Good(because there are connection lines in the process of logistics and transportation turning off, otherwise the lamp body will not

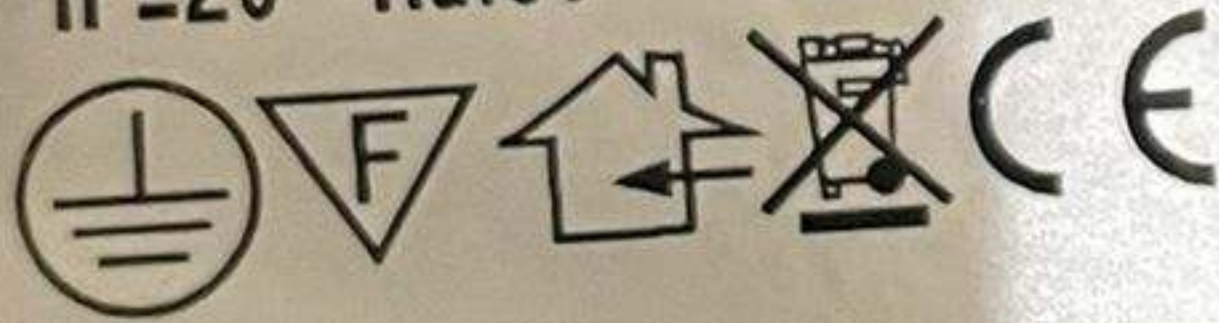