

Specifications

DESCRIPTION


- Brass construction
- Flexible supply lines with 3/8" or 1/2" compression fittings
- Includes Red/Blue indicators

FLOW

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
- 9L-12L/min @ 3bar


CARTRIDGE

- Ceramic disk cartridge

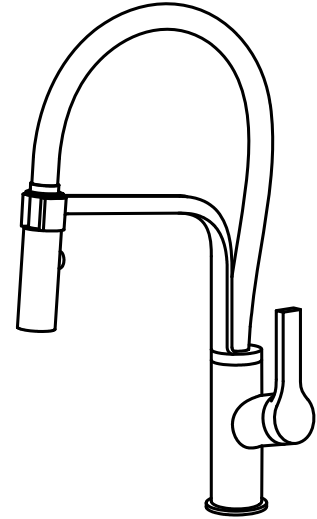

Kitchen Faucet




NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, $\Phi 1\text{-}3/8"$ ($\text{\O}35\text{mm}$)MIN.

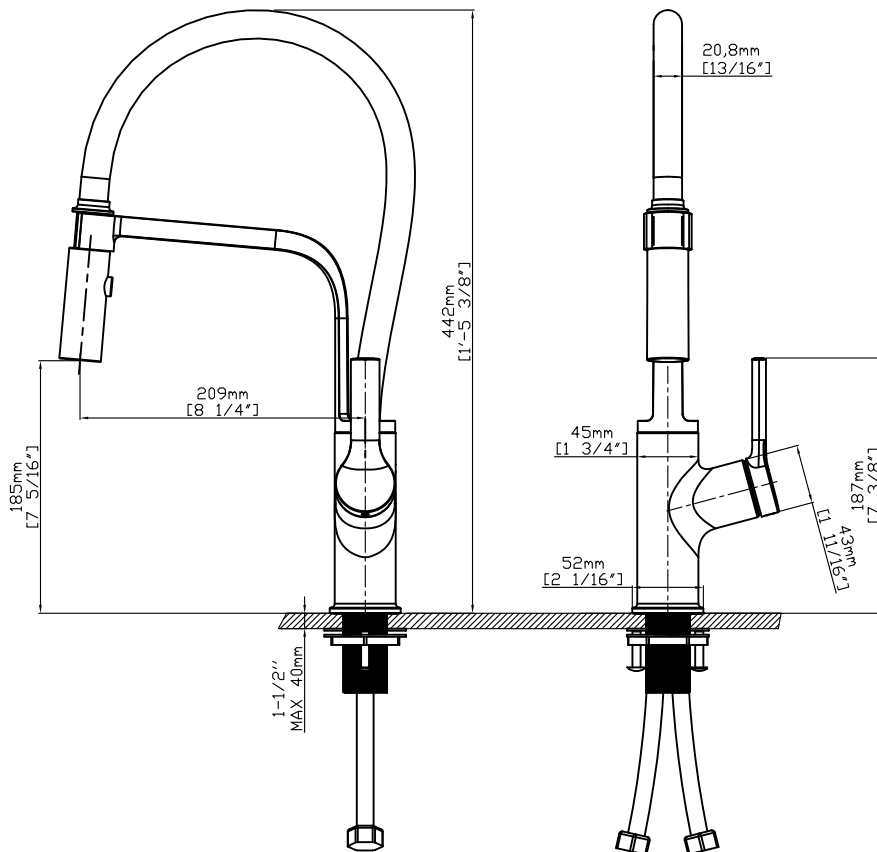

Note: Dimensions are for reference only. Detailed information is in accordance with the final product.

Kitchen Faucet Installation


INSTALLATION MANUAL Tools You Will Need :




Adjustable wrench Hexagon wrench Phillips Screwdriver

Notes before installation :


1. Please check that all components are present.
2. Before installation ensure that all feed lines are clear of debris and on/off valve is present.
3. Ensure water pressure is between 0.1-8 BAR (includes combination of hot and cold feed lines).
4. Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties please contact a professional plumber.
5. If you will be away from home for an extended period you should shut off the main water supply.




1. Remove locking-nut, metal and rubber washer and hose connector if installed.




2. Tighten the flexible hose to the faucet, left is for hot water, right is for cold water.




3. Install faucet through center hole .

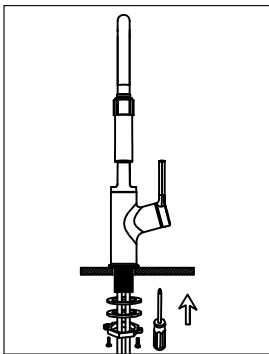


4. Assembly rubber washer, metal washer and lock nut onto faucet, then use the screwdriver to tighten the lock nut.




5. Attach flexible hose to water supply.



6. After installing faucet, remove the aerator, turn on faucet handle for 1 minute to flush debris. Close the handle and re-assemble the shower.



7. Turn the faucet on and press the top of the spray head button to change to Spray.



8. Turn the faucet on and press the bottom of the spray head button to change to stream.