

EcoFlow DELTA 2

Portable Power Station/Tragbare Powerstation

Model/Modell:

EFD330

Capacity/Kapazität:

1024Wh 51.2V \approx

Discharge Temperature/Entladetemperatur:

-10°C - 45°C (14°F - 113°F)

Charge Temperature/Ladetemperatur:

0°C - 45°C (32°F - 113°F)

AC Input/AC-Eingang:

220-240V- 10A 50Hz/60Hz

X-Stream Charge Input/X-Stream-Ladeeingang:

1200W Max

Solar/DC Input/Solar-/DC-Eingang:

11-60V \approx 15A 500W Max

Total Output/Ausgangsleistung Gesamt:

1800W

12V Output/12V-Ausgang:

12.6V \approx 10A/3A/3A 126W Max

AC Output(DisCharge Only)/AC-Ausgang(Nur DisCharge):

230V- 1800W total 50Hz/60Hz

AC Output(Bypass MODE)/AC-Ausgang(Bypass-MODUS):

220-240V- 50Hz/60Hz total 9A

USB-A Output/USB-A-Ausgang (x2):

5V \approx 2.4A 12W Max per port total 24W

USB-A Fast Charge Output/

USB-A-Schnelllade-Ausgang (x2):

5V \approx 2.4A 9V \approx 2A 12V \approx 1.5A 18W Max per port total 36W

USB-C Output(x2)/USB-C-Ausgang (x2):

5/9/12/15/20V \approx 5A 100W Max per port total 200W




www.ecoflow.com

EcoFlow Inc. Made in China



Keep Dry

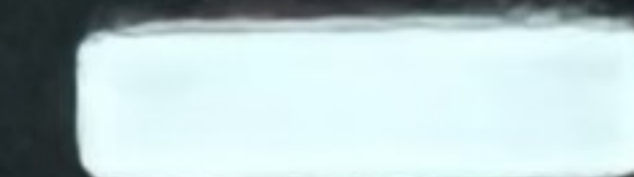

S/N.

