

2SreduxCA07452A



HEATSINK SPECIFICATIONS

Dimensions (HxWxD)
158x125x45 mm

Weight with NF-P12 fan
550 g 710 g

Socket compatibility
AMD AM4, AM5 & Intel LGA1700
(LGA17xx family), LGA1200, LGA115x
(LGA1150, LGA1151, LGA1155,
LGA1156) and LGA20xx
(LGA2066, LGA2011-0 &
LGA2011-3 Square ILM)

Please visit ncc.noctua.at for up-to-date compatibility information.

FAN SPECIFICATIONS

Product name
Noctua NF-P12 redux-1700 PWM

Max. rotational speed (+/- 10%)
1700 RPM

Bearing
SSO

Max. airflow
120.2 m³/h

Max. acoustical noise
25.1 dB(A)


Max. static pressure
2.83 mm H₂O

Input power / input current
1.08 W / 0.09 A

MTTF
> 150,000 h

SCOPE OF DELIVERY

- NH-U12S redux heatsink
- NF-P12 redux-1700 PWM fan
- NA-AVP1 grey anti-vibration pads (4x)
- Fan mounting clips (one pair)
- NT-H1 thermal compound (pre-applied)
- SecuFirm2™ mounting system

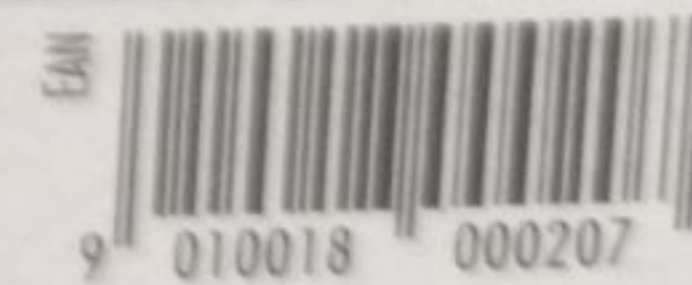

UK CA CE RoHS
Made in Taiwan • 6-year warranty
Produced acc. to ISO9001 & ISO14001
www.noctua.at/redux