


Specifications:

Model	PD6005
Input	100-240V~ 50/60Hz 2.4A Max
Output	USB-C1/C2:5V=3A, 9V=3A, 15V=5A, 20V=5A, 28V=5A (140W Max) USB-A1/A2:5V=3A, 9V=2A, 12V=1.5A (18W Max) USB-C1+USB-C2:65W+65W (130W Max) USB-A1+USB-A2:12W+12W(24W Max) USB-C1/USB-C2+USB-A1/USB-A2:100W+18W+18W(118W Max) USB-C1+USB-C2+USB-A1/USB-A1:65W+45W+18W(128W Max) USB-C1/USB-C2+USB-A1+USB-A1:100W+12W+12W(124W Max) USB-C1+USB-C2+USB-A1+USB-A2:65W+45W+12W+12W(134W Max) Total Output:140W(Max)
Total Output	140W(Max)

- **Advanced GaN Tech:** The new Gallium Nitride(GaN) semiconductor material allows for power devices that can operate at higher voltages and switching frequency creating smaller and more efficient chargers.
- **4-Port Fast Charging:** Performance-boosting smart power distribution detects & optimizes the power for the connected devices; charge smartphones and laptops simultaneously.
- **Universal Compatibility:** Perfected to work with both PD & QC charging protocols for seamless use with all USB-charged devices.
- **Safe & Reliable:** The latest & greatest in safe charging technology, including overcurrent, short-circuit, over discharge & high-temperature protections.

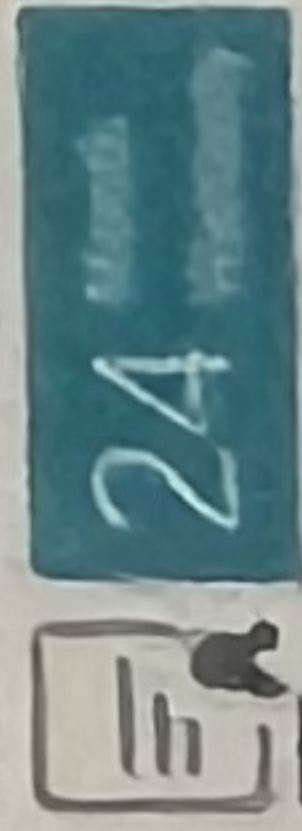

Email: support@chostech.com
Website: www.chostech.com



PD6005-EU-BK
GaN PD140W Wall Charger

