


TECHNICAL DATA SHEETS



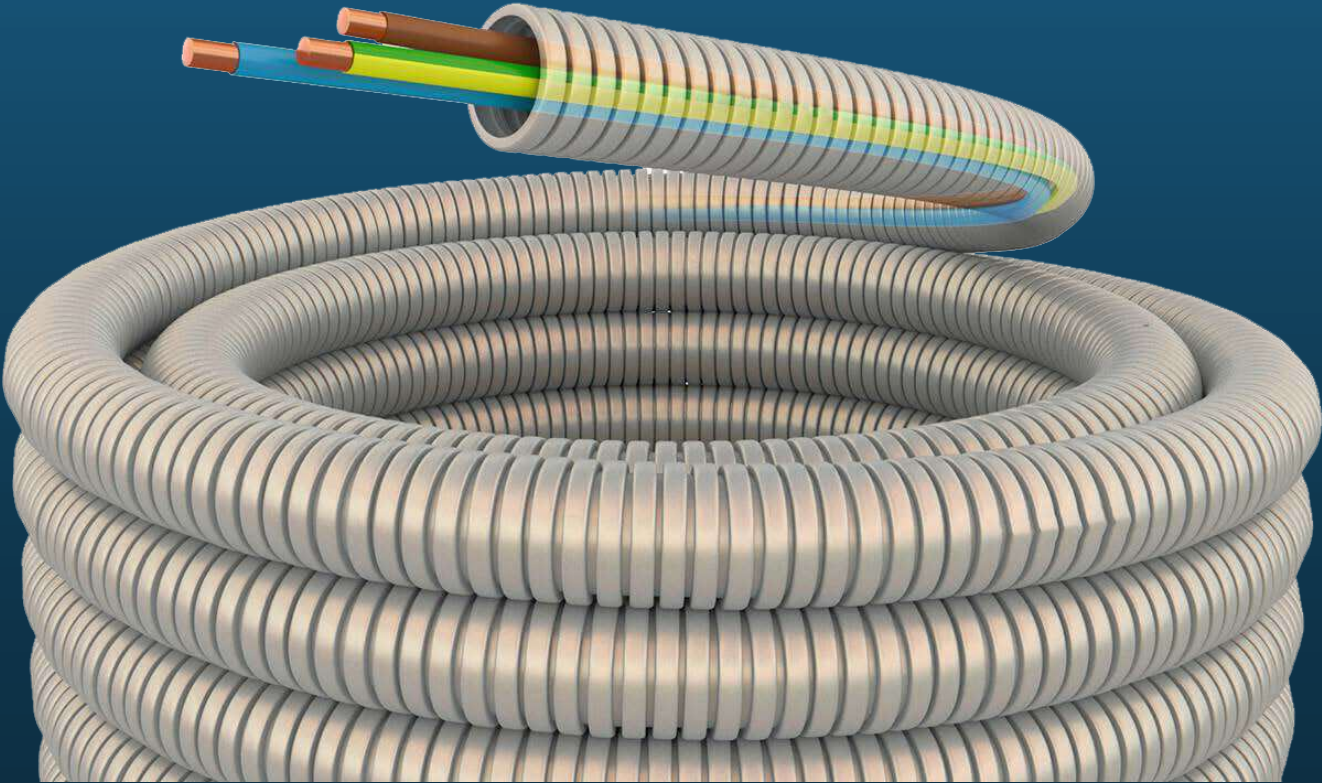

Win Time,
Win Life,

**70%
Savings
From
Labor and
Time.**

POLYPROPYLENE

**High Impact Strength and
Compression,
Pliable/Self Recovering,
Low Smoke Emission,
LSZH
Halogen Free
Smart Conduit.**




Product assessed in
SundaHus Material Data




1x2,5 + 1x1,5 H07V-U

1x2,5 + 1x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 400M  1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	GREY + BLACK 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018, EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca





Product assessed in
SundaHus Material Data




1x2,5 + 2x1,5 H07V-U

1x2,5 + 2x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M  & 400M 
OF PALLET	1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	GREY + BLUE 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018, EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data




2x2,5 + 1x1,5 H07V-U

2x2,5 + 1x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 400M  1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	GREY + BLUE 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data





NACFLEX


3x1,5 H07V-U

3x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 400M  1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	GREY + RED 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018, EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data




BEDÖMNINGEN


5G1,5 H07V-U

5G1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 400M  1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	GREY - YELLOW 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN




3G2,5 H07V-U

3G2,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  * 400M 
STRIPE COLOUR	BLUE 
	1100-1100-1350 MM / 32 ROLLS 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -15°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	  




Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca







3G2,5 + 1x1,5 H07V-U

3G2,5 + 1x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 400M 
STRIPE COLOUR	GREEN 
	1100-1100-1350 MM / 32 ROLLS 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	   / 

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data





BYGGVARU
BEDÖMNINGEN






3G2,5 + 2x1,5 H07V-U

3G2,5 + 2x1,5 H07V-U + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 400M  1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	GREY 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	   /  

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data







BYGGVARU
BEDÖMNINGEN






5G2,5 H07V-U

5G2,5 H07V-U + W/20 Ø PRE WIRED CONDUIT CABLE -
100M / GREY


Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	580-580-170 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 300M  1150-1150-1350 MM / 28 ROLLS 
STRIPE COLOUR	GREY 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	20
Inner Diameter (mm)	14,1
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07V-U * Eca
Colour of Cables	    

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca

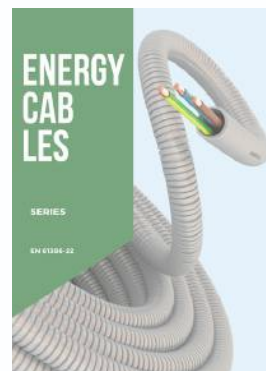

Product assessed in
SundaHus Material Data



NO FLAME PROPA GATIONS

SERIES





EN 61386-22






3G2,5 H07Z1-U

3G2,5 H07Z1-U + W/16Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M  & 400M 
OF PALLET	1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	BLUE - YELLOW 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07Z1-U * Cca
Colour of Cables	  

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca







Product assessed in
SundaHus Material Data







3G2,5 + 1x1,5 H07Z1-U

3G2,5 + 1x1,5 H07Z1-U + W/16Ø PRE WIRED CONDUIT
CABLE - 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS	100M  & 400M 
OF PALLET	1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	GREEN + YELLOW 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07Z1-U * Cca
Colour of Cables	   / 

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data




BYGGVARU
BEDÖMNINGEN


3G2,5 + 2x1,5 H07ZZ1-U

3G2,5 + 2x1,5 H07Z1-U + W/16Ø PRE WIRED CONDUIT
CABLE - 100M / GREY

Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 400M  1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	GREY + YELLOW 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07Z1-U * Cca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data







BEDÖMNINGEN






5G2,5 H07Z1-U

5G2 H07Z1-U + W/20 Ø PRE WIRED CONDUIT CABLE -
100M / GREY


Properties of the Product

CATEGORY	ENERGY & LIGHT
DIMENSIONS W-L-H	580-580-170 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 300M  1150-1150-1350 MM / 28 ROLLS 
STRIPE COLOUR	GREY - YELLOW 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	20
Inner Diameter (mm)	14,1
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	H07Z1-U * Cca
Colour of Cables	    

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca

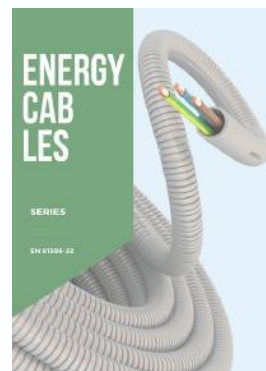

Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN



2X6 H07Z2Z2-K (SOLAR)



2X6 H07Z2Z2-K + W/20 Ø PRE WIRED CONDUIT CABLE -
100M / BLACK

Properties of the Product

CATEGORY	ENERGY
DIMENSIONS W-L-H	580-580-170 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 300M 
STRIPE COLOUR	WHITE 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free / UV
Outer Diameter (mm)	20
Inner Diameter (mm)	14,1
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	Halogen Free Photovoltaic Power cables, UV
Colour of Cables	 

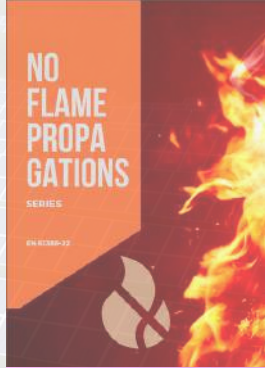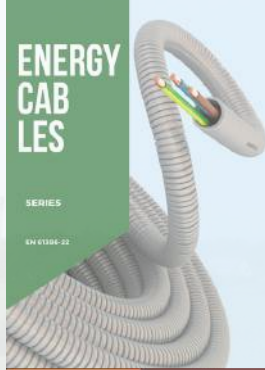

Standart of Conduits EN 61386-22, EN 61386-1, IEC60423
EN 50642:2018, EN 14582:2016
Standart of Cables EN 50525-2-31
Standart of CPR EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BYGGVARU
BEDÖMNINGEN

TELE COMMUNI CATIONS

SERIES




CAT 6 U/UTP

CAT 6 U/UTP + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 400M  1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	WHITE 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	CAT 6 U/UTP * Eca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data




CAT 6 U/UTP LSZH

CAT 6 U/UTP LSZH + W/16Ø PRE WIRED CONDUIT CABLE - 100M / GREY



Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 400M  1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	WHITE 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	CAT 6 U/UTP * Dca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca

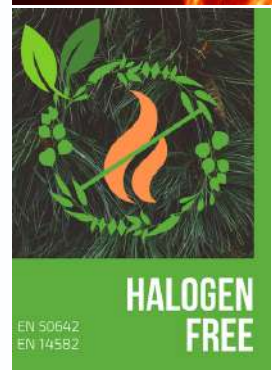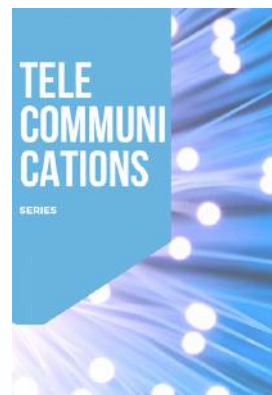

Standart of Conduits

EN 61386-22, EN 61386-1, IEC60423
EN 50642:2018 , EN 14582:2016

Standart of Cables

EN 50525-2-31

Standart of CPR

EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data







BEDÖMNINGEN


ECO COAXCIAL

ECO COAXCIAL + W/16Ø PRE WIRED CONDUIT CABLE -
100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGHTS DIMENSIONS OF PALLET	100M  & 400M  1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	ORANGE 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	ECO COAXCIAL * Eca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN


2 X CAT 6 U/UTP

2 X CAT 6 U/UTP + W/20Ø PRE WIRED CONDUIT CABLE
- 100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	580-580-170 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 300M  1150-1150-1350 MM / 28 ROLLS 
STRIPE COLOUR	WHITE + GREY 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	20
Inner Diameter (mm)	14,1
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	CAT 6 U/UTP LSZH * Eca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data




2 X CAT 6 U/UTP LSZH

2 X CAT 6 U/UTP + W/20Ø PRE WIRED
CONDUIT CABLE - 100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	580-580-170 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 300M  1150-1150-1350 MM / 28 ROLLS 
STRIPE COLOUR	WHITE + GREY 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	20
Inner Diameter (mm)	14,1
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	CAT 6 U/UTP LSZH * Dca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018, EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data




ECO COAX X CAT 6 U/UTP

ECO COAXIAL + CAT 6 U/UTP + W/20Ø PRE WIRED CONDUIT
CABLE - 100M / GREY



Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	580-580-170 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 300M  1150-1150-1350 MM / 28 ROLLS 
STRIPE COLOUR	ORANGE + GREY 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	20
Inner Diameter (mm)	14,1
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	Eca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018, EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca

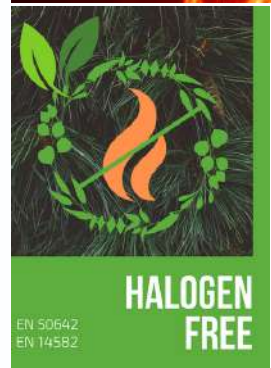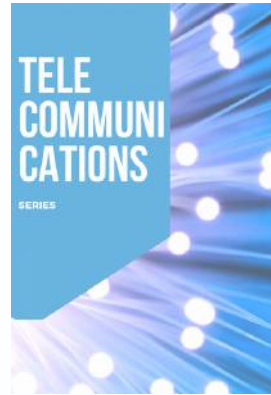

Product assessed in
SundaHus Material Data







BEDÖMNINGEN


2 X 0,80 YR

2 x 0,80 YR + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY


Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS DIMENSIONS OF PALLET	100M  & 400M  1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	WHITE + YELLOW 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	YR 0,8 mm ² * Dca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca

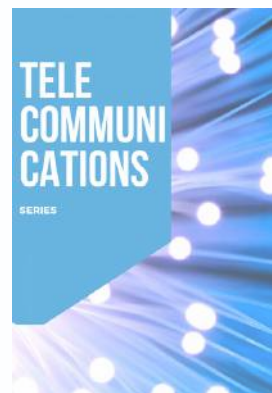

Product assessed in
SundaHus Material Data




4 X 0,80 YR

4 x 0,80 YR + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY


Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGHTS	100M  & 400M 
DIMENSIONS OF PALLET	1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	WHITE + BLUE 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	YR 0,8 mm ² * Dca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca

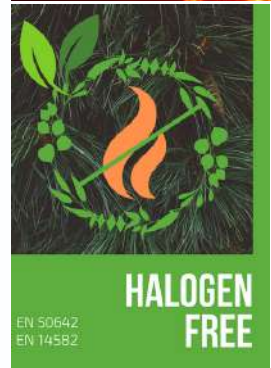

Product assessed in
SundaHus Material Data



BEDÖMNINGEN


6 X 0,80 YR

6 x 0,80 YR + W/16Ø PRE WIRED CONDUIT CABLE
- 100M / GREY



Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS	100M  & 400M 
DIMENSIONS OF PALLET	1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	WHITE + GREEN 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	YR 0,8 mm ² * Dca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca

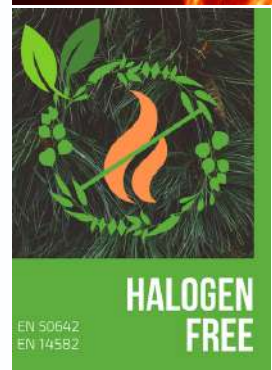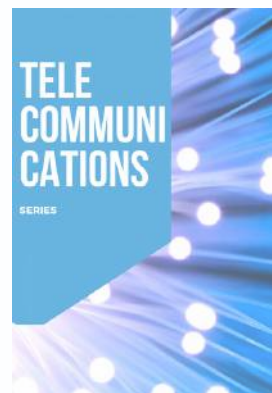

Product assessed in
SundaHus Material Data




6 X 0,22 mm² + 0,22 mm²

6 X 0,22 mm² + 0,22 mm² LIY(st)Y + W/16Ø PRE WIRED CONDUIT
CABLE - 100M / GREY

Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS	100M  & 400M 
DIMENSIONS OF PALLET	1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	BLACK + GREEN 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	LIY(st)Y 6x0,22 mm ² * Eca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN


8 X 0,22 mm² + 0,22 mm²

8 X 0,22 mm² + 0,22 mm² LIY(st)Y + W/16Ø PRE WIRED CONDUIT
CABLE - 100M / GREY



Properties of the Product

CATEGORY	TELECOMMUNICATION / DATA
DIMENSIONS W-L-H	550-550-150 MM
PACKING	ROLL or DRUM
LENGTHS	100M  & 400M 
DIMENSIONS OF PALLET	1100-1100-1350 MM / 32 ROLLS 
STRIPE COLOUR	BLACK + BLUE 

Properties of the Conduits and Cable

Conduit Material	PP / Flame Retardant / Halogen Free
Outer Diameter (mm)	16
Inner Diameter (mm)	10,7
Pressure Resistance	750N / 23°C
Impact Resistance	(6J) With -5°C / (2J) With -25°C
High Temperature	90°C
Cable and Cpr	LIY(st)Y 8x0,22 mm ² * Eca
Colour of Cables	

Standart of Conduits	EN 61386-22, EN 61386-1, IEC60423 EN 50642:2018 , EN 14582:2016
Standart of Cables	EN 50525-2-31
Standart of CPR	EN 50575:2014+A1:2016-CPR-CLASS-Eca

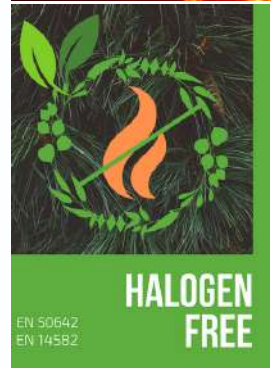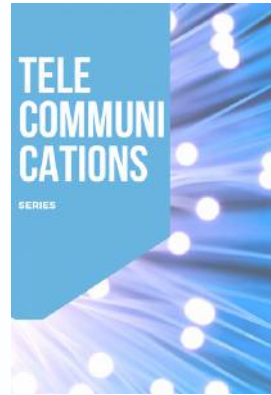

Standart of Conduits
Standart of Cables
Standart of CPR

EN 61386-22, EN 61386-1, IEC60423
EN 50642:2018 , EN 14582:2016
EN 50525-2-31
EN 50575:2014+A1:2016-CPR-CLASS-Eca



Product assessed in
SundaHus Material Data



BEDÖMNINGEN

