


**ELECTRICAL TEST:**

1. 100% OPEN & SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 3 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

**WIRE CONNECTION**

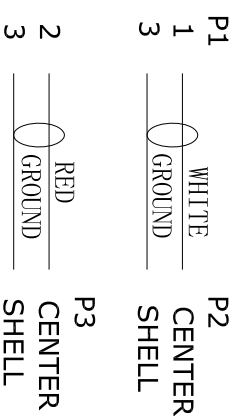

NO	DESCRIPTION	Q'TY	UNIT	REV			DESCRIPTION			DATE	NAME
				REV	ECN	TOLERANCE INCHES M/M	REV	ECN	TOLERANCE INCHES M/M		
8	heat-shrinkable tubing ~ \$ 2.0MM~BLACK~	0.01	pcs								
7	TRASPARENT PE ROHS LDPE	4	g								
6	45P RED PVC ROHS	6	g								
5	45P WHITE(N-BHC 2001) PVC ROHS	6	g								
4	45P BLACK PVC ROHS	6	g								
3	RCA M SHELL PLATED:NICKEL BLACK INSULATION	2	pcs								
2	DC3.5 M SHELL PLATED:NICKEL THREE TYPE	1	pcs								
1	NO UL [7/0.127TC*1C+S(28/0.10TC)] *2F OD:2.8*2.8MM BLACK PVC	10	m								
NO	DESCRIPTION										

REV	ECN	TOLERANCE INCHES M/M	REV	ECN	TOLERANCE INCHES M/M
		.X			.30
		.XX			.10
		.XXX			.05

DRAWN BY: ZHOUWENLONG			SCALE: NONE		
CHECK BY:			UNIT: MM		
APPD BY:			DATE: 2019.10.22		
P/N : 11.09.4349			DRAWING NO.: CA1790107		
TITLE: ROLINE 3.5mm/ 2XRCA (M) Cable 10M			REV. AO 1/1		