

INSTALLATION INSTRUCTION

Model: VT-8033
LED Dome Light




INTRODUCTION

Thank you for selecting and buying V-TAC LED Dome light. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any other query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best.

TECHNICAL PARAMETERS

| | | | | |
|-----------------------|-----------------------|---|---------------|------------|
| Performace parameter | Lamp | warm white | natural white | cool white |
| | Lumens (lm) | 1100 lm | 1200 lm | 1250 lm |
| | color temperature (K) | 3000K | 4000K | 6400K |
| | CRI | ≥80 | | |
| | Type of LED | SMD2835 LED | | |
| | Beam angle | 110° | | |
| | Decay rate (%) | less than 3% within 1000 working hours | | |
| | Total power (W) | 35W | | |
| | Lifespan (Hrs) | ≥30000Hrs | | |
| | High voltage testing | 500Vac/1min | | |
| LED parameter | Lighting efficiency | 100LM/W | | |
| | Chip quantity | 96PCS | | |
| | Series-parallel way | 16S6B | | |
| | Voltage | 50 - 52V DC | | |
| | Current | 280mA | | |
| Driver specification | Input parameter | 110~240Vac, 50/60Hz | | |
| | Power factor | 0.9 | | |
| | Output parameter | 50-52V DC, 850mA | | |
| Structure parameter | Material | PC | | |
| | Dimension | φ 200 x 50mm | | |
| | Cut - out | / | | |
| | Protection class | calss I | | |
| | IP | IP44 | | |
| Environment parameter | Application | hotel, home-lighting, recreation place, supermarket office building | | |
| | Operating temperature | -25°C ~ 50°C, 10% - 90% R.H. | | |
| | Storage temperature | -30°C ~ 85°C, 0% - 95% R.H. | | |
| Packing specification | Qty / Ctn | carton size | N.W | G.W |
| | 8PCs / Ctn | | | |

STRUCTURE & SIZE

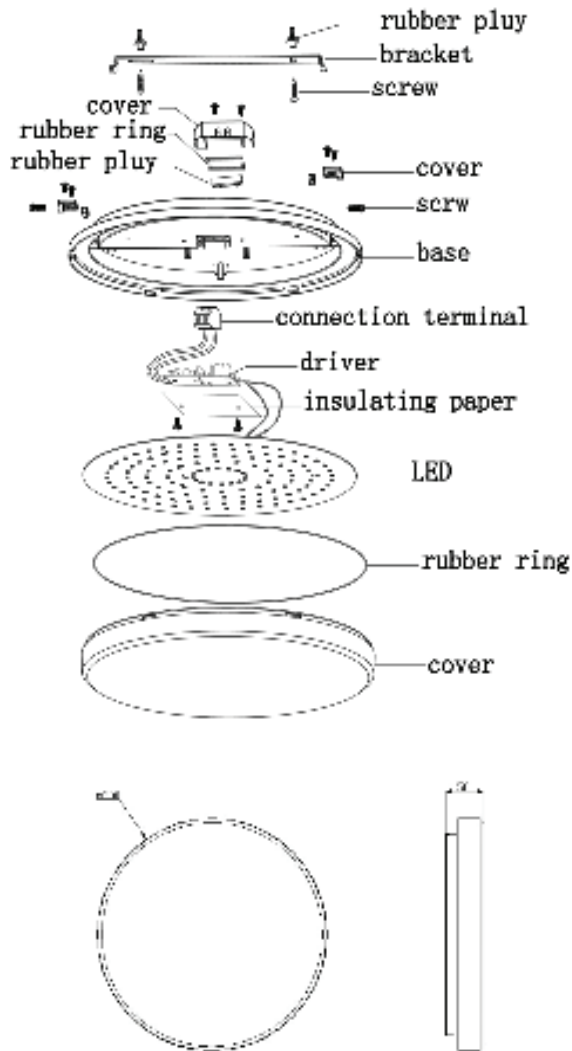

INSTALLATION INSTRUCTION

1. Switch off the power.
2. To drill the appropriate holes, then put the particles and fix the bracket on the wall by screw. (picture 1)
3. Connect the the electricity 100-240V. (picture 2)
4. Install the light on the ceiling. (picture 3)
5. Switch on the power if above steps are done properly without any mistakes.

