

1 2 3 4 5 6 7 8 9 10 11 12 13 14

A

B

C

D

E

F

G

H

I

J

A

B

C

D

E




F

G


H

I

J

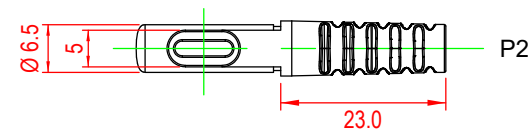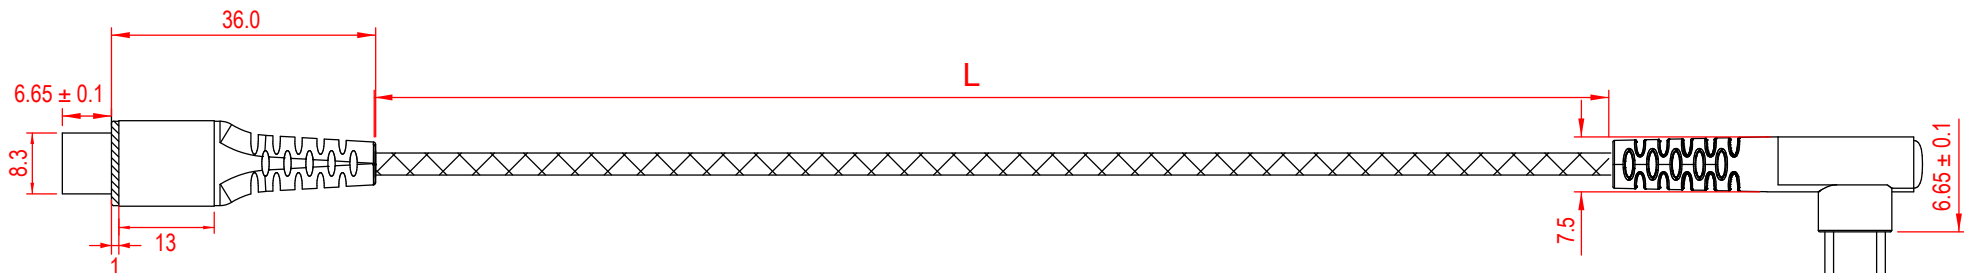

Anschlussdiagramm / Wiring diagram

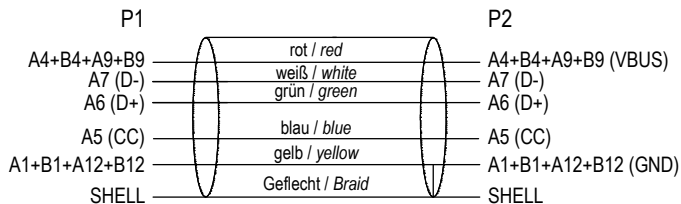

Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)
64658	DAT USB-C/A 2.0 90° 0,5m textil sw/si PL	500 ± 30 mm
64659	DAT USB-C/A 2.0 90° 1,0m textil sw/si PL	1000 ± 30 mm
64660	DAT USB-C/A 2.0 90° 2,0m textil sw/si PL	2000 ± 30 mm



USB-C™-auf-USB-A-Textilkabel mit Metallsteckern (spacegrau/silber) 90°

- ermöglicht schnelles Laden mit maximal 60 W (20 V / 3 A)
- mit gewinkeltem USB-C™-Stecker
- verstärkte Metallstecker mit Knickschutz und geflochtener, strapazierfähiger Textilmantel um das Kabel

Anschlüsse: USB-C™-Stecker, gewinkelter USB-C™-Stecker 90°
 Kabelaufbau: 5C*0.59M #24*2C+#30*3C+AB
 Schirmung 64/0.06
 Datenübertragungsrate: 0,48 Gbit/s

USB-C™ to USB-A Textile Cable with Metal Plugs (Space Grey/Silver) 90°

- enables fast charging with a maximum of 60 W (20 V / 3 A)
- with angled USB-C™ plug
- reinforced metal plug with bend protection and braided, durable textile sheath around the cable

Connectors: USB-C™ plug, angled USB-C™ plug 90°
 Cable structure: 5C*0.59M #24*2C+#30*3C+AB
 Shielding 64/0.06
 Data transmission rate: 0.48 Gbit/s

Änderungen

Datum	Name	gez.:	Datum	Name
		gez.:	03.02.2023	aw
		gepr.:	03.02.2023	aw
		Norm:		
Änderungen vorbehalten / Subject to change				

Bezeichnung
**DAT USB-C/A 2.0 90° Xm
 textil sw/si PL**
 Zeichnungs-Nr.:
64658, 64659, 64660



Blatt
1/1
 von

1 2 3 4 5 6 7 8 9 10 11 12 13 14