



User Guide

TL-ER604W

SafeStream Wireless N Gigabit Broadband VPN Router



COPYRIGHT & TRADEMARKS

Specifications are subject to change without notice. **TP-LINK®** is a registered trademark of TP-LINK TECHNOLOGIES CO., LTD. Other brands and product names are trademarks of their respective holders.

No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK TECHNOLOGIES CO., LTD. Copyright © 2013 TP-LINK TECHNOLOGIES CO., LTD. All rights reserved.

<http://www.tp-link.com>

FCC STATEMENT



This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

CE Mark Warning



This is a class A product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

CONTENTS

Package Contents	1
Chapter 1 About this Guide	2
1.1 Intended Readers	2
1.2 Conventions	2
1.3 Overview of this Guide	2
Chapter 2 Introduction	3
2.1 Overview of the Router	3
2.2 Features	4
2.3 Appearance	6
2.3.1 Front Panel	6
2.3.2 Rear Panel	7
Chapter 3 Configuration	8
3.1 Network	8
3.1.1 Status	8
3.1.2 System Mode	8
3.1.3 WAN	10
3.1.4 LAN	27
3.1.5 MAC Address	30
3.1.6 Switch	31
3.2 Wireless	37
3.2.1 Wireless Setting	37
3.2.2 MAC Filtering	50
3.2.3 Host Status	51
3.3 User Group	52
3.3.1 Group	52
3.3.2 User	53
3.3.3 View	54

3.4	Advanced	55
3.4.1	NAT	55
3.4.2	Traffic Control	63
3.4.3	Session Limit	66
3.4.4	Load Balance	68
3.4.5	Routing	72
3.5	Firewall	77
3.5.1	Anti ARP Spoofing	77
3.5.2	Attack Defense	80
3.5.3	MAC Filtering	82
3.5.4	Access Control	82
3.5.5	App Control	88
3.6	VPN	89
3.6.1	IKE	90
3.6.2	IPsec	94
3.6.3	L2TP/PPTP	100
3.7	Services	104
3.7.1	PPPoE Server	104
3.7.2	E-Bulletin	109
3.7.3	Dynamic DNS	111
3.7.4	UPnP	116
3.8	Maintenance	117
3.8.1	Admin Setup	117
3.8.2	Management	120
3.8.3	License	122
3.8.4	Statistics	123
3.8.5	Diagnostics	125
3.8.6	Time	127

3.8.7	Logs	128
Chapter 4	Application.....	130
4.1	Network Requirements.....	130
4.2	Network Topology.....	131
4.3	Configurations.....	131
4.3.1	Internet Setting	131
4.3.2	VPN Setting	133
4.3.3	Network Management.....	139
4.3.4	Network Security.....	143
Appendix A	Hardware Specifications	148
Appendix B	FAQ	149
Appendix C	Glossary	151

Package Contents

The following items should be found in your package:

- One TL-ER604W Router
- One Power Adapter
- One RJ45 Ethernet Cable
- Quick Installation Guide
- Resource CD

**Note:**

Make sure that the package contains the above items. If any of the listed items is damaged or missing, please contact with your distributor.

Chapter 1 About this Guide

This User Guide contains information for setup and management of TL-ER604W Router. Please read this guide carefully before operation.

1.1 Intended Readers



This Guide is intended for Network Engineer and Network Administrator.

1.2 Conventions

In this Guide the following conventions are used:

- The Router or TL-ER604W mentioned in this Guide stands for TL-ER604W SafeStream Wireless N Gigabit Broadband VPN Router without any explanation.
- **Menu Name→Submenu Name→Tab page** indicates the menu structure. **Advanced→NAT→Basic NAT** means the Basic NAT page under the NAT menu option that is located under the Advanced menu.
- **Bold font** indicates a toolbar icon, menu or menu item.
- indicate a button.

Symbols in this Guide:

Symbol	Description
 Note:	Ignoring this type of note might result in a malfunction or damage to the device.
 Tips:	This format indicates important information that helps you make better use of your device.

1.3 Overview of this Guide

Chapter 1 About This Guide	Introduces the guide structure and conventions.
Chapter 2 Introduction	Introduces the features and appearance of this router.
Chapter 3 Configuration	Introduces how to configure the Router via Web management page.
Chapter 4 Application	Introduces the practical application of the Router on the enterprise network.
Appendix A Hardware Specifications	Lists the hardware specifications of this router.
Appendix B FAQ	Provides the possible solutions to the problems that may occur during the installation and operation of the router.
Appendix C Glossary	Lists the glossary used in this guide.

Chapter 2 Introduction

Thanks for choosing the SafeStream Wireless N Gigabit Broadband VPN Router TL-ER604W.

2.1 Overview of the Router

The SafeStream Wireless N Gigabit Broadband VPN Router TL-ER604W from TP-LINK supports Wireless N speed and Gigabit wired speeds on all ports. It integrates multiple VPN protocols, high-security and high-performance VPN capabilities, making it an ideal choice for branch offices in need of cost-effective secure remote connections to headquarters or remote offices. Furthermore, together with many useful features including hardware-based WiFi On/Off button, Guest Networking, App Control, and PPPoE Server functions, TL-ER604W is an ideal network solution for home or small office consumers.

- **Powerful Data Processing Capability**

- + Built-in MIPS 32 network processor and 64MB DDRII high-speed RAM allows the stability and reliability for operation.

- **Wireless Feature**

- + Wireless N speed provides an incredible high speed experience.
- + Supporting Guest Networking feature, which provides a secure network for guests outside of the existing, potentially sensitive LAN.
- + Hardware Wi-Fi On/Off button provides an easy way to turn wireless radio on or off

- **Virtual Private Network (VPN)**

- + Providing comprehensive IPsec VPN with DES/3DES/AES encryptions, MD5/SHA1 identifications and automatically/manually IKE Pre-Share Key exchanges.
- + Supporting PPTP/L2TP VPN Server mode to allow the staff on business or remote branch office to access the headquarter network.

- **Online Behavior Management**

- + Complete Functions of Access Rules can allow managers to select the network service levels to block or allow applications of FTP downloading, Email, Web browsing and so on.
- + Deploying One-Click restricting of IM/P2P applications to save time & energy while reserving exceptional groups for certain users.
- + Supporting URL Filtering to prevent potential hazards from visiting the malicious Web sites.

- **Powerful Firewall**

- + Supporting One-Click IP-MAC Binding to avoid ARP spoofing and guarantee a network without stagnation.
- + Featured Attack Defense to protect the network from a variety of flood attack and packet anomaly attack.

+ Possessing MAC Filtering function to block the access of illegal hosts.

- **Flexible Traffic Control**

+ Featured Bandwidth Control with flexible bandwidth management to automatically control the bandwidth of the host in bi-direction to avoid bandwidth over occupation, as well as optimize bandwidth usage.

+ Supporting Session Limit to avoid the complaint of a few people to force whole sessions.

- **Dual-WAN Ports**

+ Providing two 10/100/1000M WAN ports for users to connect two Internet lines for bandwidth expansion.

+ Supporting multiple Load Balance modes, including Bandwidth Based Balance Routing, Application Optimized Routing, and Policy Routing to optimize bandwidth usage.

+ Featured Link Backup to switch all the new sessions from dropped line automatically to another for keeping an always on-line network.

- **Easy-to-use**

+ Providing easy-to-use GUI with clear configuration steps and detailed help information for the users to configure the Router simply.

+ Helping administrators to monitor the whole network status and take actions to malfunctions according to the recorded log information.

+ Supporting remote management to manage the Router from remote places.

2.2 Features

Hardware

- 1 fixed gigabit WAN port, 1 interchangeable gigabit WAN/LAN port, 3 fixed gigabit LAN ports
- Fanless Design for Quiet Operation
- Hardware Wi-Fi On/Off button provides an easy way to turn wireless radio on or off
- Supports Professional 4kV common mode lightning protection
- Complies with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.11 b/g/n standards
- Supports AH, ESP, IKE, PPP protocols
- Supports TCP/IP, DHCP, ICMP, NAT, NAPT protocols
- Supports PPPoE, SNTP, HTTP, DDNS, UPnP, NTP protocols

Basic Functions

- Supports Static IP, Dynamic IP, PPPoE/Russian PPPoE, L2TP/Russian L2TP, PPTP/Russian PPTP, Dual Access, BigPond Internet connections

- Supports Virtual Server, Port Triggering, ALG, Static Route and RIP v1/v2
- Built-in Switch supporting Port Mirror, Port VLAN, Rate Control and so on
- Supports to change the MAC address of LAN and WAN port
- Supports Logs, Statistics, Time setting
- Supports Remote and Web management
- Supports Diagnostic (Ping/Tracert) and Online Detection

Wireless

- Supports Wireless N speed and 2 detachable 5dBi antennas
- Supports WEP, WPA/WPA2, WPA-PSK/WPA2-PSK Encryption
- Supports WDS, Multi-SSID, Guest Network

VPN

- Supports IPsec VPN and provides up to 30 IPsec VPN tunnels
- Supports IPSec VPN in LAN-to-LAN or Client-to-LAN
- Provides DES, 3DES, AES128, AES152, AES256 encryption, MD5, SHA1 authentication
- Supports IKE Pre-Share Key and DH1/DH2/DH5 Key Exchanges
- Supports PPTP/L2TP Server/Client

Traffic Control

- Supports Bandwidth Control
- Supports Session Limit

Security

- Built-in firewall supporting URL/MAC Filtering
- Supports Access Control
- Supports Attack Defense
- Supports IP-MAC Binding
- Supports GARP (Gratuitous ARP)
- Deploys One-Click restricting of IM/P2P applications

2.3 Appearance

2.3.1 Front Panel

The front panel of TL-ER604W is shown as the following figure.

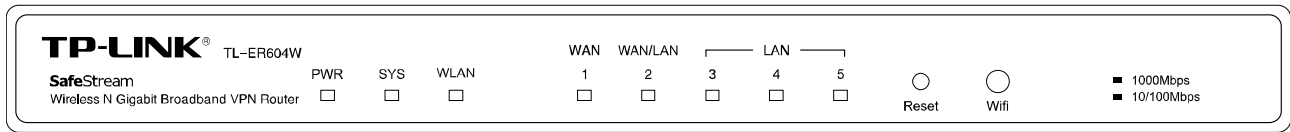


Figure 2-1 Front Panel

- LEDs

LED	Status	Indication
PWR	On	The Router is powered on
	Off	The Router is powered off or power supply is abnormal
SYS	Flashing	The Router works properly
	On/Off	The Router works improperly
WLAN	On(Green)	The wireless function is enabled
	Off	The wireless function is disabled
	Flashing(Green)	There is data being transferred through wireless
WAN,LAN	On (Green/Yellow)	There is a device linked to the corresponding port but no activity. (Green light indicates the linked device is running at 1000Mbps, and yellow indicates the linked device is running at 10/100Mbps.)
	Off	There is no device linked to the corresponding port
	Flashing (Green/Yellow)	The corresponding port is transmitting or receiving data. (Green light indicates the linked device is running at 1000Mbps, and yellow indicates the linked device is running at 10/100Mbps.)

- Interface Description

Interface	Port	Description
WAN	1~2	The WAN port is for connecting the Router to a DSL/Cable modem or Ethernet by the RJ45 cable
LAN	2~5	The LAN port is for connecting the Router to the local PCs or switches by the RJ45 cable

- **Reset button**

Use the button to restore the Router to the factory defaults. With the Router powered on, use a pin to press and hold the Reset button (about 4~5 seconds). After the SYS LED goes out, release the Reset button. If the SYS LED is flashing with a high frequency about two or three seconds, it means the Router is restored successfully.

- **Wifi button**

Press this button to enable or disable WI-FI.

2.3.2 Rear Panel

The rear panel of TL-ER604W is shown as the following figure.

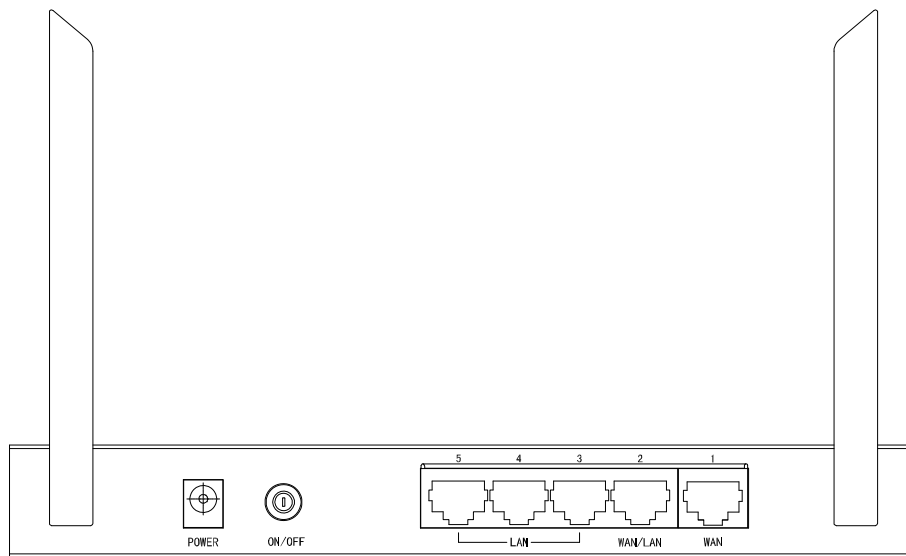


Figure 2-2 Rear Panel

- **Antenna**

The router provides two external detachable antennas for receiving and transmitting the wireless data.

- **Power**

The power socket is where you will connect the power adapter. Please use the power adapter provided with this TL-ER604W SafeStream Wireless N Gigabit Broadband VPN Router.

- **On/Off**

Press this button to turn on or turn off the Router.



Note:

Please use only the power cord provided with this Router.

Chapter 3 Configuration

3.1 Network

3.1.1 Status

The Status page shows the system information, the port connection status and other information related to this Router.

Choose the menu **Network**→**Status** to load the following page.



Figure 3-1 Status

3.1.2 System Mode

The TL-ER604W Router can work in three modes: NAT, Non-NAT and Classic.

If your Router is hosting your local network's connection to the Internet with a network topology as the Figure 3-2 shown, you can set it to NAT mode.



Figure 3-2 Network Topology - NAT Mode

If your Router is connecting the two networks of different areas in a large network environment with a network topology as the Figure 3-3 shown, and forwards the packets between these two networks by the Routing rules, you can set it to Non-NAT mode.

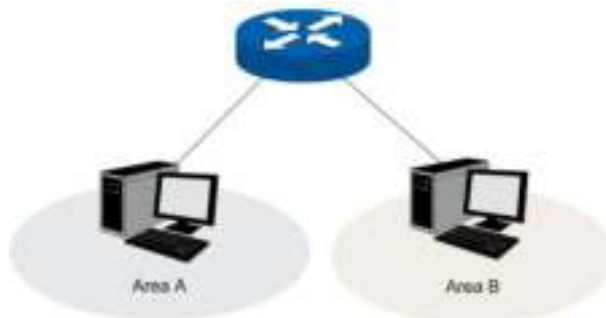


Figure 3-3 Network Topology – Non-NAT Mode

If your Router is connected in a combined network topology as the Figure 3-4 shown, you can set it to Classic Mode.

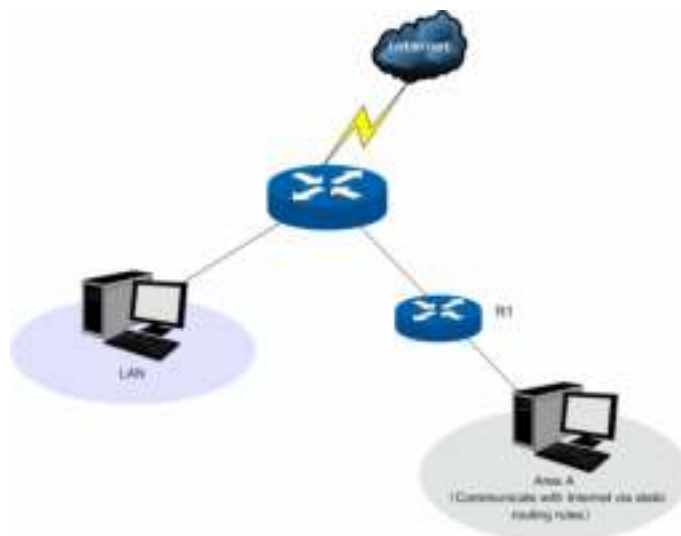


Figure 3-4 Network Topology – Classic Mode

Choose the menu **Network**→**System Mode** to load the following page.



Figure 3-5 System Mode

You can select a System Mode for your Router according to your network need.

- **NAT Mode**

NAT (Network Address Translation) mode allows the Router to translate private IP addresses within internal networks to public IP addresses for traffic transport over external networks, such as the Internet. Incoming traffic is translated back for delivery within the internal network. However, the Router will drop all the packets whose source IP addresses are in different subnet of LAN port. For example: If the LAN port of the Router is set to 192.168.0.1 for IP address and 255.255.255.0 for the Subnet Mask, then the subnet of LAN port is 192.168.0.0/24. The packet with 192.168.0.123 as its source IP address can be transported by NAT, whereas the packet with 20.31.76.80 as its source IP address will be dropped.

- **Non-NAT Mode**

In this mode, the Router functions as the traditional Gateway and forwards the packets via routing protocol. The Hosts in different subnets can communicate with one another via the routing rules whereas no NAT is employed.



Note:

In Non-NAT mode, all the NAT forwarding rules will be disabled.

- **Classic Mode**

It's the combined mode of NAT mode and Non-NAT mode. In Classic mode, the Router will first transport the packets which are compliant with NAT forwarding rules and then match the other packets to the static routing rules. The matched packets will be transmitted based on the static routing rules and the unmatched ones will be dropped. In this way, the Router can implement NAT for the packets without blocking the packets in the different subnet of the ports.

3.1.3 WAN

3.1.3.1 WAN Mode

TL-ER604W provides two adjustable WAN ports. You can set the number of WAN ports on this page.

Choose the menu **Network**→**WAN**→**WAN Mode** to load the following page.

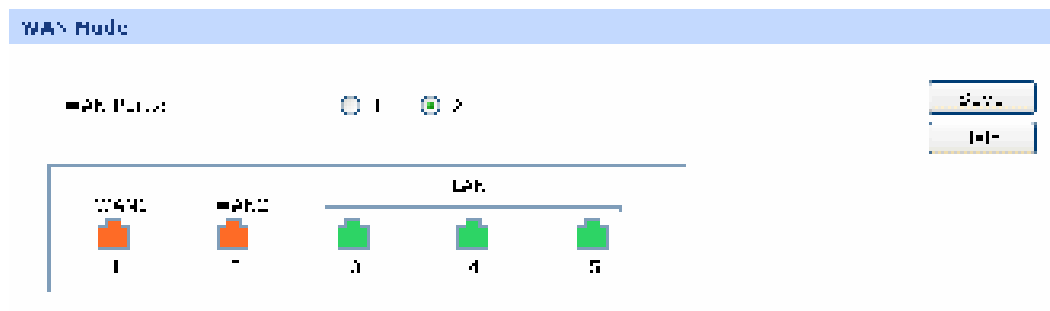


Figure 3-6 WAN Mode

➤ WAN Mode

WAN Ports:

Select the total number of WAN ports you prefer to use. The Router support one WAN and dual WAN. The Router will adjust the physical ports accordingly, which can be illustrated on the following port sketch.



Note:

By default, TL-ER604W is set to work in the mode of dual WAN ports.

3.1.3.2 WAN1

TL-ER604W provides the following six Internet connection types: Static IP, Dynamic IP, PPPoE/Russian PPPoE, L2TP/Russian L2TP, PPTP/Russian PPTP and BigPond. To configure the WAN, please first select the type of Internet connection provided by your ISP (Internet Service Provider).



Tips:

It's allowed to set the IP addresses of both the WAN ports within the same subnet. However, to guarantee a normal communication, make sure that the WAN ports can access the same network, such as Internet or a local area network.

Choose the menu **Network**→**WAN**→**WAN1** to load the configuration page.

1) Static IP

If a static IP address has been provided by your ISP, please choose the Static IP connection type to configure the parameters for WAN port manually.

Static IP Settings		
Connection Type:	Static IP	<input checked="" type="checkbox"/>
IP Address:	0.0.0.0	<input type="button" value="OK"/> <input type="button" value="Help"/>
Subnet Mask:	0.0.0.0	
Default Gateway:	0.0.0.0	(Optional)
MTU:	1500	(576-1500)
Primary DNS:	0.0.0.0	(Optional)
Secondary DNS:	0.0.0.0	(Optional)
Upstream Bandwidth:	1000000	Kbps
Downstream Bandwidth:	1000000	Kbps

Figure 3-7 WAN – Static IP

The following items are displayed on this screen:

➤ **Static IP**

- Connection Type:** Select Static IP if your ISP has assigned a static IP address for your computer.
- IP Address:** Enter the IP address assigned by your ISP. If you are not clear, please consult your ISP.
- Subnet Mask:** Enter the Subnet Mask assigned by your ISP.
- Default Gateway:** Optional. Enter the Gateway assigned by your ISP.
- MTU:** MTU (Maximum Transmission Unit) is the maximum data unit transmitted by the physical network. It can be set in the range of 576-1500. The default MTU is 1500. It is recommended to keep the default value if no other MTU value is provided by your ISP.
- Primary DNS:** Enter the IP address of your ISP's Primary DNS (Domain Name Server). If you are not clear, please consult your ISP. It's not allowed to access the Internet via domain name if the Primary DNS field is blank.
- Secondary DNS:** Optional. If a Secondary DNS Server address is available, enter it.
- Upstream Bandwidth:** Specify the bandwidth for transmitting packets on the port.

Downstream Bandwidth: Specify the bandwidth for receiving packets on the port.

2) Dynamic IP

If your ISP (Internet Service Provider) assigns the IP address automatically, please choose the Dynamic IP connection type to obtain the parameters for WAN port automatically.

Dynamic IP Settings

Connection Type:	Dynamic IP	[Obtain] [Release]	[Save]
Host Name:			[Apply] [OK]
MTU:	1500	(Range: 576-1500)	
<input type="checkbox"/> Use the following DNS Server:			
Primary DNS:	0.0.0.0		
Secondary DNS:	0.0.0.0	(Optional)	
<input type="checkbox"/> Get IP address by Unicast Discovery and when required:			
Internet Bandwidth:	0/0/0	[Apply]	
Downstream Bandwidth:	100000	[Apply]	

Dynamic IP Status

Status:	Connecting...
IP Address:	
Subnet Mask:	...
Default Gateway:	
Primary DNS:	...
Secondary DNS:	

Figure 3-8 WAN – Dynamic IP

The following items are displayed on this screen:

➤ Dynamic IP

Connection Type: Select Dynamic IP if your ISP assigns the IP address automatically. Click <Obtain> to get the IP address from your ISP's server. Click <Release> to release the current IP address of WAN port.

Host Name: Optional. This field allows you to give a name for the Router. It's blank by default.

MTU: MTU (Maximum Transmission Unit) is the maximum data unit transmitted by the physical network. It can be set in the range of 576-1500. The default MTU is 1500. It is recommended to keep

the default value if no other MTU value is provided by your ISP.

**Get IP Address by
Unicast:**

The broadcast requirement may not be supported by a few ISPs. Select this option if you can not get the IP address from your ISP even if with a normal network connection. This option is not required generally.

**Use the following DNS
Server:**

Select this option to enter the DNS (Domain Name Server) address manually.

Primary DNS:

Enter the IP address of your ISP's Primary DNS (Domain Name Server). If you are not clear, please consult your ISP.

Secondary DNS:

Optional. If a Secondary DNS Server address is available, enter it.

Upstream Bandwidth:

Specify the bandwidth for transmitting packets on the port.

Downstream

Specify the bandwidth for receiving packets on the port.

Bandwidth:

➤ **Dynamic IP Status**

Status:

Displays the status of obtaining an IP address from your ISP.

- “Disabled” indicates that the Dynamic IP connection type is not applied.
- “Connecting” indicates that the Router is obtaining the IP parameters from your ISP.
- “Connected” indicates that the Router has successfully obtained the IP parameters from your ISP.
- “Disconnected” indicates that the IP address has been manually released or the request of the Router gets no response from your ISP. Please check your network connection and consult your ISP if this problem remains.

IP Address:

Displays the IP address assigned by your ISP.

Subnet Mask:

Displays the Subnet Mask assigned by your ISP.

Gateway Address: Displays the Gateway Address assigned by your ISP.

Primary DNS: Displays the IP address of your ISP's Primary DNS.

Secondary DNS: Displays the IP address of your ISP's Secondary DNS.

3) PPPoE

If your ISP (Internet Service Provider) has provided the account information for the PPPoE connection, please choose the PPPoE connection type (Used mainly for DSL Internet service).

PPPoE Settings

Connection Type: PPPoE (DSL) ▼ Connect Disconnect Save Revert Help

PPPoE Connection:

Account Name:

Password:

Authn. Method:
☒ CHAP
☐ PAP
☐ TMSCHAP

Active: ☐ ☐ Off VPI: ☐ Off VPI:

☐ PPPoE Account 24000000
Keep Alive Interval: (0-120 seconds, 0 for no sending)
Keep Alive Retry Times: (1-10)
MTU: (0-1500)
Send off: (0-1)
Service Name: (if no service required)
Primary DNS:
Secondary DNS: (Optional)

Secondary Connection:

Connection Type: Static IP ▼
☐ Address:
☐ Subnet Address:
☐ Mask:
Assign Release

Default Bandwidth: Plus
Traffic with Limitation: Kbps

PPPoE Status

Status: Disconnected

IP Address: 10.1.1.1

Default Gateway: 10.1.1.1

Primary DNS: 202.107.77.1

Secondary DNS: 202.107.77.2

Figure 3-9 WAN - PPPoE

-15-

The following items are displayed on this screen:

➤ **PPPoE Settings**

Connection Type: Select PPPoE if your ISP provides xDSL Virtual Dial-up connection. Click <Connect> to dial-up to the Internet and obtain the IP address. Click <Disconnect> to disconnect the Internet connection and release the current IP address.

Account Name: Enter the Account Name provided by your ISP. If you are not clear, please consult your ISP.

Password: Enter the Password provided by your ISP.

Active Mode: You can select the proper Active mode according to your need.

- Manual: Select this option to manually activate or terminate the Internet connection by the <Connect> or <Disconnect> button. It is optimum for the dial-up connection charged on time.
- Always-on: Select this option to keep the connection always on. The connection can be re-established automatically when it is down.
- Time-based: Select this option to keep the connection on during the Active time you set.

PPPoE Advanced Settings: Check here to enable PPPoE advanced settings.

Keep Alive: Once PPPoE is connected, the Router will send keep-alive packets every "Keep Alive Interval" sec and "Keep Alive Retry Times" to make sure the connection is still alive. If the Router does not get the response from ISP after sending keep-alive packets, then the Router will terminate the connection.

MTU: MTU (Maximum Transmission Unit) is the maximum data unit transmitted by the physical network. It can be set in the range of 576-1492. The default MTU is 1480. It is recommended to keep the default value if no other MTU value is provided by your ISP.

ISP Address: Optional. Enter the ISP address provided by your ISP. It's null by default.

Service Name: Optional. Enter the Service Name provided by your ISP. It's null by default.

Primary DNS: Enter the IP address of your ISP's Primary DNS.

Secondary DNS: Optional. Enter the IP address of your ISP's Secondary DNS.

Secondary Connection: Here allows you to configure the secondary connection. Dynamic IP and Static IP connection types are provided.

Connection Type: Select the secondary connection type. Options include Disable, Dynamic IP and Static IP.

IP Address: If Static IP is selected, configure the IP address of WAN port. If Dynamic IP is selected, the obtained IP address of WAN port is displayed.

Subnet Address: If Static IP is selected, configure the subnet address of WAN port. If Dynamic IP is selected, the obtained subnet address of WAN port is displayed.

Status: Displays the status of secondary connection.

Upstream Bandwidth: Specify the bandwidth for transmitting packets on the port.

Downstream Bandwidth: Specify the bandwidth for receiving packets on the port.

➤ **PPPoE Status**

Status: Displays the status of PPPoE connection.

- “Disabled” indicates that the PPPoE connection type is not applied.
- “Connecting” indicates that the Router is obtaining the IP parameters from your ISP.

- “Connected” indicates that the Router has successfully obtained the IP parameters from your ISP.
- “Disconnected” indicates that the connection has been manually terminated or the request of the Router has no response from your ISP. Please ensure that your settings are correct and your network is connected well. Consult your ISP if this problem remains.

IP Address: Displays the IP address assigned by your ISP.

Gateway Address: Displays the Gateway Address assigned by your ISP.

Primary DNS: Displays the IP address of your ISP's Primary DNS.

Secondary DNS: Displays the IP address of your ISP's Secondary DNS.

4) L2TP

If your ISP (Internet Service Provider) has provided the account information for the L2TP connection, please choose the L2TP connection type.

L2TP Settings

Connection Type: L2TP / Run as L2TP

L2TP Connection:

Account Name: xxxx
Password: xxxxxxxx
Server IP: 192.168.0
VPI: 0 (0 to 255)
Active Mode:
☒ Manual
☐ Automatic

Secondary Connection:

Connection Type: ☒ Static IP ☐ Dynamic IP
IP Address: 0.0.0.0
Subnet Mask: 0.0.0.0
Default Gateway: 0.0.0.0
Primary DNS: 0.0.0.0
Secondary DNS: 0.0.0.0

Upstream Bandwidth:

100000

Downstream Bandwidth:

100000

L2TP Status

Status:	Disabled
IP Address:	0.0.0.0
Primary DNS:	0.0.0.0
Secondary DNS:	0.0.0.0

Figure 3-10 WAN - L2TP

The following items are displayed on this screen:

➤ **L2TP Settings**

Connection Type: Select L2TP if your ISP provides a L2TP connection. Click <Connect> to dial-up to the Internet and obtain the IP address. Click <Disconnect> to disconnect the Internet connection and release the current IP address.

Account Name: Enter the Account Name provided by your ISP. If you are not clear, please consult your ISP.

Password: Enter the Password provided by your ISP.

Server IP: Enter the Server IP provided by your ISP.

MTU:	MTU (Maximum Transmission Unit) is the maximum data unit transmitted by the physical network. It can be set in the range of 576-1460. The default MTU is 1460. It is recommended to keep the default value if no other MTU value is provided by your ISP.
Active Mode:	<p>You can select the proper Active Mode according to your need.</p> <ul style="list-style-type: none"> • Manual: Select this option to manually activate or terminate the Internet connection by the <Connect> or <Disconnect> button. It is optimum for the dial-up connection charged on time. • Always-on: Select this option to keep the connection always on. The connection can be re-established automatically when it is down.
Secondary Connection:	Here allows you to configure the secondary connection. Dynamic IP and Static IP connection types are provided.
Connection Type:	Select the secondary connection type. Options include Disable, Dynamic IP and Static IP.
IP Address:	If Static IP is selected, configure the IP address of WAN port. If Dynamic IP is selected, the IP address of WAN port obtained is displayed.
Subnet Mask:	If Static IP is selected, configure the subnet mask of WAN port. If Dynamic IP is select, the subnet mask of WAN port obtained is displayed.
Default Gateway:	If Static IP is selected, configure the default gateway. If Dynamic IP is selected, the obtained default gateway is displayed.
Primary DNS/ Secondary DNS:	If Static IP is selected, configure the DNS. If Dynamic IP is selected, the obtained DNS is displayed.
Upstream Bandwidth:	Specify the bandwidth for transmitting packets on the port.
Downstream Bandwidth:	Specify the bandwidth for receiving packets on the port.

➤ L2TP Status

Status:	<p>Displays the status of PPPoE connection.</p> <ul style="list-style-type: none">● “Disabled” indicates that the L2TP connection type is not applied.● “Connecting” indicates that the Router is obtaining the IP parameters from your ISP.● “Connected” indicates that the Router has successfully obtained the IP parameters from your ISP.● “Disconnected” indicates that the connection has been manually terminated or the request of the Router has no response from your ISP. Please ensure that your settings are correct and your network is connected well. Consult your ISP if this problem remains.
IP Address:	Displays the IP address assigned by your ISP.
Primary DNS:	Displays the IP address of your ISP’s Primary DNS.
Secondary DNS:	Displays the IP address of your ISP’s Secondary DNS.

5) PPTP

If your ISP (Internet Service Provider) has provided the account information for the PPTP connection, please choose the PPTP connection type.

PPTP Settings

Connection Type:

PPTP / L2TP over PPTP

Connect

Disconnect

View

Refresh

Help

PPP/PP Connections:

Account Name:

Account

Password:

Server IP:

192.168.0

MTU:

1450

(255-1450)

Access Mode:

Manual

Automatic

Secondary Connections:

Connection Type:

☒ Static IP
 ☐ Dynamic IP

IP Address:

0.0.0.0

Subnet Mask:

0.0.0.0

Default Gateway:

0.0.0.0

Primary DNS:

0.0.0.0

Secondary DNS:

0.0.0.0

Upper Limit Bandwidth:

100000

Kbps

Downstream Bandwidth:

100000

Kbps

PPTP Status

Status:

Disabled

IP Address:

0.0.0.0

Primary DNS:

0.0.0.0

Secondary DNS:

0.0.0.0

Figure 3-11 WAN - PPTP

The following items are displayed on this screen:

➤ PPTP Settings

Connection Type: Select PPTP if your ISP provides a PPTP connection. Click <Connect> to dial-up to the Internet and obtain the IP address. Click <Disconnect> to disconnect the Internet connection and release the current IP address.

Account Name: Enter the Account Name provided by your ISP. If you are not clear, please consult your ISP.

Password: Enter the Password provided by your ISP.

Server IP: Enter the Server IP provided by your ISP.

-22-

MTU:	MTU (Maximum Transmission Unit) is the maximum data unit transmitted by the physical network. It can be set in the range of 576-1460. The default MTU is 1460. It is recommended to keep the default value if no other MTU value is provided by your ISP.
Active Mode:	<p>You can select the proper Active mode according to your need.</p> <ul style="list-style-type: none"> ● Manual: Select this option to manually activate or terminate the Internet connection by the <Connect> or <Disconnect> button. It's optimum for the dial-up connection charged on time. ● Always-on: Select this option to keep the connection always on. The connection can be re-established automatically when it is down.
Secondary Connection:	Here allows you to configure the secondary connection. Dynamic IP and Static IP connection types are provided.
Connection Type:	Select the secondary connection type. Options include Disable, Dynamic IP and Static IP.
IP Address:	If Static IP is selected, configure the IP address of WAN port. If Dynamic IP is selected, the IP address of WAN port obtained is displayed.
Subnet Mask:	If Static IP is selected, configure the subnet mask of WAN port. If Dynamic IP is select, the subnet mask of WAN port obtained is displayed.
Default Gateway:	If Static IP is selected, configure the default gateway. If Dynamic IP is selected, the obtained default gateway is displayed.
Primary DNS/ Secondary DNS:	If Static IP is selected, configure the DNS. If Dynamic IP is selected, the obtained DNS is displayed.
Upstream Bandwidth:	Specify the bandwidth for transmitting packets on the port.
Downstream Bandwidth:	Specify the bandwidth for receiving packets on the port.

➤ PPTP Status

Status:	<p>Displays the status of PPTP connection.</p> <ul style="list-style-type: none">• “Disabled” indicates that the PPTP connection type is not applied.• “Connecting” indicates that the Router is obtaining the IP parameters from your ISP.• “Connected” indicates that the Router has successfully obtained the IP parameters from your ISP.• “Disconnected” indicates that the connection has been manually terminated or the request of the Router has no response from your ISP. Please ensure that your settings are correct and your network is connected well. Consult your ISP if this problem remains.
IP Address:	Displays the IP address assigned by your ISP.
Primary DNS:	Displays the IP address of your ISP’s Primary DNS.
Secondary DNS:	Displays the IP address of your ISP’s Secondary DNS.

6) BigPond

If your ISP (Internet Service Provider) has provided the account information for the BigPond connection, please choose the BigPond connection type.

BigPond Settings			
Connection Type	BigPond	<input type="button" value="Connect"/> <input type="button" value="Disconnect"/>	<input type="button" value="Save"/> <input type="button" value="Refresh"/> <input type="button" value="Help"/>
Account Name	user		
Password	+++++		
Auth. Server			
Auth. Domain			
Active Voice	<input checked="" type="radio"/> Manual <input type="radio"/> Always on		
MTU	1500	(500-1500)	
Upstream Speed	100.000	Kbps	
Download Bandwidth	1000000	Kbps	

BigPond Status	
Status	Disabled
IP Address	---
Search Hosts	---
Default Gateway	---

Figure 3-12 WAN – Bigpond

The following items are displayed on this screen:

➤ **BigPond Settings**

Connection Type: Select BigPond if your ISP provides a BigPond connection. Click <Connect> to dial-up to the Internet and obtain the IP address. Click <Disconnect> to disconnect the Internet connection and release the current IP address.

Account Name: Enter the Account Name provided by your ISP. If you are not clear, please consult your ISP.

Password: Enter the Password provided by your ISP. If you are not clear, please consult your ISP.

Auth Server: Enter the address of authentication server. It can be IP address or server name.

Auth Domain: Enter the domain name of authentication server. It's only required when the address of Auth Server is a server name.

Auth Mode:

You can select the proper Active mode according to your need.

- Manual: Select this option to manually activate or terminate the Internet connection by the <Connect> or <Disconnect> button. It is optimum for the dial-up connection charged on time.
- Always-on: Select this option to keep the connection always on. The connection can be re-established automatically when it is down.

MTU:

MTU (Maximum Transmission Unit) is the maximum data unit transmitted by the physical network. It can be set in the range of 576-1500. The default MTU is 1500.

Upstream/Downstream Bandwidth:

Specify the Upstream/Downstream Bandwidth for the port. To make "Load Balance" and "Bandwidth Control" take effect, please set these parameters correctly.

➤ **BigPond Status**

Status:

Displays the status of BigPond connection.

- "Disabled" indicates that the BigPond connection type is not applied.
- "Connecting" indicates that the Router is obtaining the IP parameters from your ISP.
- "Connected" indicates that the Router has successfully obtained the IP parameters from your ISP.
- "Disconnected" indicates that the connection has been manually terminated or the request of the Router has no response from your ISP. Please ensure that your settings are correct and your network is connected well. Consult your ISP if this problem remains.

IP Address:

Displays the IP address assigned by your ISP.

Subnet Mask:

Displays the Subnet Mask assigned by your ISP.

Default Gateway:

Displays the IP address of the default gateway assigned by your ISP.

**Note:**

To ensure the BigPond connection re-established normally, please restart the connection at least 5 seconds after the connection is off.

3.1.4 LAN

3.1.4.1 LAN

On this page, you can configure the parameters for LAN port of this router.

Choose the menu **Network**→**LAN**→**LAN** to load the following page.

LAN	
IP Address:	192.168.0.1 <input type="button" value="Save"/>
Subnet Mask:	255.255.255.0 <input type="button" value="Set"/>

Figure 3-13 LAN

The following items are displayed on this screen:

➤ **LAN**

IP Address:

Enter the LAN IP address of the Router. 192.168.0.1 is the default IP address. The Hosts in LAN can access the Router via this IP address. It can be changed according to your network.

Subnet Mask:

Enter the Subnet Mask. The default subnet mask is 255.255.255.0.

**Note:**

If the LAN IP address is changed, you must use the new IP address to log into the Router. To guarantee a normal communication, be sure to set the Gateway address and the Subnet Mask of the Hosts on the LAN to the new LAN IP address and the Subnet Mask of the Router.

3.1.4.2 DHCP

The Router with its DHCP (Dynamic Host Configuration Protocol) server enabled can automatically assign an IP address to the computers in the local area network.

Choose the menu **Network**→**LAN**→**DHCP** to load the following page.

DHCP Settings

DHCP Server: ☒ Enable ☐ Disable

Start IP Address:

End IP Address:

Lease Time: (Optional)

Default Gateway: (Optional)

Default Domain: (Optional)

Primary DNS: (Optional)

Figure 3-14 DHCP Settings

The following items are displayed on this screen:

➤ DHCP Settings

DHCP Server:

Enable or disable the DHCP server on your Router. To enable the Router to assign the TCP/IP parameters to the computers in the LAN automatically, please select Enable.

Start IP Address:

Enter the Start IP address to define a range for the DHCP server to assign dynamic IP addresses. This address should be in the same IP address subnet with the Router's LAN IP address. The default address is 192.168.0.2.

End IP Address:

Enter the End IP address to define a range for the DHCP server to assign dynamic IP addresses. This address should be in the same IP address subnet with the Router's LAN IP address. The default address is 192.168.0.254.

Lease Time:

Specify the length of time the DHCP server will reserve the IP address for each computer. After the IP address expired, the client will be automatically assigned a new one.

Default Gateway:

Optional. Enter the Gateway address to be assigned. It is recommended to enter the IP address of the LAN port of the Router.

Default Domain:

Optional. Enter the domain name of your network.

Primary DNS:

Optional. Enter the Primary DNS server address provided by your ISP. It is recommended to enter the IP address of the LAN port of the Router.

Secondary DNS: Optional. If a Secondary DNS Server address is available, enter it.

3.1.4.3 DHCP Client

On this page, you can view the information about all the DHCP clients connected to the Router.

Choose the menu **Network**→**LAN**→**DHCP Client** to load the following page.

List of DHCP Client				
No.	Host Name	MAC Address	IP Address	Lease Time
1	TP-LINK_00000000	00-00-00-00-00-00	192.168.0.1	12:00:00

Figure 3-15 DHCP Client

You can view the information of the DHCP clients in this table. Click the **Refresh** button for the updated information.

3.1.4.4 DHCP Reservation

DHCP Reservation feature allows you to reserve an IP address for the specified MAC address. The client with this MAC address will always get the same IP address every time when it accesses the DHCP server.

Choose the menu **Network**→**LAN**→**DHCP Reservation** to load the following page.

DHCP Reservation					
MAC Address	<input type="text" value="00-00-00-00-00-00"/>			<input type="button" value="Add"/>	
IP Address	<input type="text"/>			<input type="button" value="Clear"/>	
Description	<input type="text" value="(Optional)"/>			<input type="button" value="Apply"/>	
Status	<input checked="" type="radio"/> Active <input type="radio"/> Inactive				
List of Reserved Address					
No.	MAC Address	IP Address	Status	Description	Action

Figure 3-16 DHCP Reservation

The following items are displayed on this screen:

➤ DHCP Reservation

MAC Address: Enter the MAC address of the computer for which you want to reserve the IP address.

IP Address: Enter the reserved IP address.

Description: Optional. Enter a description for the entry. Up to 28 characters can be entered.

Status: Activate or Inactivate the corresponding entry.

➤ List of Reserved Address

In this table, you can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-16 indicates: The IP address 192.168.0.101 is reserved for the computer with the MAC address 00-19-66-83-53-CF, and this entry is activated.



Note:

It's recommended that users bind the IP address and the MAC address in 3.5.1.1 IP-MAC Binding , then import the entries from the IP-MAC binding table to the List of Reserved Address in buck by clicking <Import> button in Figure 3-16 DHCP Reservation.

3.1.5 MAC Address

The MAC (Media Access Control) address, as the unique identifier of the router in network, does not need to be changed commonly.

Set the MAC Address for LAN port:

In a complex network topology with all the ARP bound devices, if you want to use TL-ER604W instead of the current router in a network node, you can just set the MAC address of TL-ER604W's LAN port the same to the MAC address of the previous router, which can avoid all the devices under this network node to update their ARP binding tables.

Set the MAC Address for WAN port:

In the condition that your ISP has bound the account and the MAC address of the dial-up device, if you want to change the dial-up device to be TL-ER604W, you can just set the MAC address of TL-ER604W's WAN port the same to the MAC address of the previous dial-up device for a normal Internet connection.

Choose the menu **Network**→**MAC Address**→**MAC Address** to load the following page.

MAC			
Port	Current MAC Address	MAC Clone	
WAN	00-10-00-00-00-00	Backup Factory MAC	Clone Current PC's MAC
WAN	00-10-00-00-00-00	Backup Factory MAC	Clone Current PC's MAC
LAN	00-10-00-00-00-00	Custom Factory MAC	

Figure 3-17 MAC Address

The following items are displayed on this screen:

➤ MAC Address

Port: Displays the port type of the Router.

Current MAC Address: Displays the current MAC address of the port.

MAC Clone: It's only available for WAN port. Click the <Restore Factory MAC> button to restore the MAC address to the factory default value or click the <Clone Current PC's MAC> button to clone the MAC address of the PC you are currently using to configure the router. Then click <Save> to apply.



Note:

To avoid a conflict of MAC address on the local area network, it's not allowed to set the MAC address of the Router's LAN port to the MAC address of the current management PC.

3.1.6 Switch

Some basic switch port management functions are provided by TL-ER604W, which facilitates you to monitor the traffic and manage the network effectively.

3.1.6.1 Statistics

Statistics screen displays the detailed traffic information of each port, which allows you to monitor the traffic and locate faults promptly.

Choose the menu **Network**→**Switch**→**Statistics** to load the following page.

Statistics						
	Port Name	Eth 1	Port 2	Eth 3	Port 4	Eth 5
Received	Unicast	0	-	2.8%	-	0
	Broadcast	0	-	2.8%	-	0
	Drop	0	-	0	-	0
	Port Queue	0	-	0	-	0
	Unicast	0	-	0	-	0
	Drop	0	-	0	-	0
	Total (Bytes)	0	-	222950	-	0
Transmitted	Unicast	0	-	5.0%	-	0
	Broadcast	0	-	0	-	0
	Drop	0	-	0	-	0
	Port Queue	0	-	0	-	0
	Total (Bytes)	0	-	558247	-	0
Back Clear All Exp						

Figure 3-18 Statistics

The following items are displayed on this screen:

➤ **Statistics**

Unicast:	Displays the number of normal unicast packets received or transmitted on the port.
Broadcast:	Displays the number of normal broadcast packets received or transmitted on the port.
Pause:	Displays the number of flow control frames received or transmitted on the port.
Multicast:	Displays the number of normal multicast packets received or transmitted on the port.
Undersize:	Displays the number of the received frames (including error frames) that are less than 64 bytes long.
Normal:	Displays the number of the received packets (including error frames) that are between 64 bytes and the maximum frame length. The maximum untagged frame this Router can support is 1518 bytes long and the maximum tagged frame is 1522 bytes long.
Oversize:	Displays the number of the received packets (including error frames) that are longer than the maximum frame.
Total (Bytes):	Displays the total number of the received or transmitted packets (including error frames).

Click the <Clear All> button to clear all the traffic statistics.



Tips:

The Port 1/2/3/4/5 mentioned in this User Guide refers to the WAN1/2 port and LAN1/2/3 port on the Router.

3.1.6.2 Port Mirror

Port Mirror, the packets obtaining technology, functions to forward copies of packets from one/multiple ports (mirrored port) to a specific port (mirroring port). Usually, the mirroring port is connected to a data diagnose device, which is used to analyze the mirrored packets for monitoring and troubleshooting the network.

Choose the menu **Network**→**Switch**→**Port Mirror** to load the following page.

Port	Mirroring Port	Mirrored Port
4	<input checked="" type="radio"/>	<input checked="" type="checkbox"/>
-	<input type="radio"/>	<input checked="" type="checkbox"/>
-	<input type="radio"/>	<input checked="" type="checkbox"/>
1	<input type="radio"/>	<input checked="" type="checkbox"/>
-	<input type="radio"/>	<input checked="" type="checkbox"/>

Figure 3-19 Port Mirror

The following items are displayed on this screen:

➤ General

Enable Port Mirror: Check the box to enable the Port Mirror function. If unchecked, it will be disabled.

Mode: Select the mode for the port mirror function. Options include:

- **Ingress:** When this mode is selected, only the incoming packets received by the mirrored port will be copied to the mirroring port.
- **Egress:** When this mode is selected, only the outgoing packets sent by the mirrored port will be copied to the mirroring port.
- **Ingress & Egress:** When this mode is selected, both the incoming and outgoing packets through the mirrored port will be copied to the mirroring port.

➤ Port Mirror

Mirroring Port: Select the Mirroring Port to which the traffic is copied. Only one port can be selected as the mirroring port.

Mirrored Port: Select the Mirrored Port from which the traffic is mirrored. One or multiple ports can be selected as the mirrored ports.

The entry in Figure 3-19 indicates: The outgoing packets sent by port 1, port 2, port 3 and port 5 (mirrored ports) will be copied to port 4 (mirroring port).

Application Example:

To monitor all the traffic and analyze the network abnormality for an enterprise's network, please set the Port Mirror function as below:

General

☒ Enable Port Mirror

Mode:

Ingress & Egress

Port Mirror

Port	Mirroring Port	Mirrored Ports
	<div><input type="radio"/></div>	<div><input checked="" type="checkbox"/></div>
-	<div><input type="radio"/></div>	<div><input checked="" type="checkbox"/></div>
-	<div><input checked="" type="radio"/></div>	<div><input type="checkbox"/></div>
-	<div><input type="radio"/></div>	<div><input checked="" type="checkbox"/></div>
-	<div><input type="radio"/></div>	<div><input checked="" type="checkbox"/></div>

Save

Help

- 1)

Check the box before **Enable Port Mirror** to enable the Port Mirror function and select the **Ingress & Egress** mode.
- 2)

Select Port 3 to be the Mirroring Port to monitor all the packets of the other ports.
- 3)

Select all the other ports to be the Mirrored Ports.
- 4)

Click the <Save> button to apply.

3.1.6.3 Rate Control

On this page, you can control the traffic rate for the specific packets on each port so as to manage your network flow.

Choose the menu **Network**→**Switch**→**Rate Control** to load the following page.

Rate Control

Port	Ingress Limit	Ingress Rate(Mbps)	Egress Limit	Egress Rate(Mbps)
1	<div><input checked="" type="checkbox"/> Enable</div>	<div>1</div>	<div><input checked="" type="checkbox"/> Enable</div>	<div>1</div>
2	<div><input type="checkbox"/> Enable</div>	<div>1</div>	<div><input type="checkbox"/> Enable</div>	<div>1</div>
3	<div><input type="checkbox"/> Enable</div>	<div>1</div>	<div><input type="checkbox"/> Enable</div>	<div>1</div>
4	<div><input type="checkbox"/> Enable</div>	<div>1</div>	<div><input type="checkbox"/> Enable</div>	<div>1</div>
5	<div><input type="checkbox"/> Enable</div>	<div>1</div>	<div><input type="checkbox"/> Enable</div>	<div>1</div>

Save

Help

Figure 3-20 Rate Control

The following items are displayed on this screen:

➤ **Rate Control**

- Port:** Displays the port number.
- Ingress Limit:** Specify whether to enable the Ingress Limit feature.
- Ingress Rate:** Specify the limit rate for the ingress packets.
- Egress Limit:** Specify whether to enable Egress Limit feature.
- Egress Rate:** Specify the limit rate for the egress packets.

The first entry in Figure 3-20 indicates: The Ingress and Egress Limits are enabled for port 1. The Ingress and Egress Rates are 1Mbps. That is, the receiving rate for the ingress packets will not exceed 1Mbps, and the transmitting rate for all the egress packets will not exceed 1Mbps.

3.1.6.4 Port Config

On this page, you can configure the basic parameters for the ports.

Choose the menu **Network**→**Switch**→**Port Config** to load the following page.

Port	Status	Ingress Control	Egress Control	Negotiation Mode
0	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	100
1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	100
2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	100
3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	100
4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	100
All Ports	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Figure 3-21 Port Config

The following items are displayed on this screen:

➤ Port Config

- Status:** Specify whether to enable the port. The packets can be transported via this port after being enabled.
- Flow Control:** Allows you to enable/disable the Flow Control function.
- Negotiation Mode:** Select the Negotiation Mode for the port.
- All Ports:** Allows you to configure the parameters for all the ports at one time.

3.1.6.5 Port Status

On this page, you can view the current status of each port.

Choose the menu **Network**→**Switch**→**Port Status** to load the following page.

Port Status				
Port	Status	Speed(Mbps)	Link Mode	Flow Control
1	Link Up			
2	Link Up			
3	Link Up	1.0	10	enable
4	Link Up			
5	Link Up			

Back

Exit

Figure 3-22 Port Status

3.1.6.6 Port VLAN

A VLAN (Virtual Local Area Network) is a network topology configured according to a logical scheme rather than the physical layout, which allows you to divide the physical LAN into multiple logical LANs so as to control the communication among the ports.

The VLAN function can prevent the broadcast storm in LANs and enhance the network security. By creating VLANs in a physical LAN, you can divide the LAN into multiple logical LANs, each of which has a broadcast domain of its own. Hosts in the same VLAN communicate with one another as if they are in a LAN. However, hosts in different VLANs cannot communicate with one another directly. Therefore, broadcast packets are limited in a VLAN.

TL-ER604W provides the Port VLAN function, which allows you to create multiple logical VLANs for the LAN ports based on their port numbers.

Choose the menu **Network**→**Switch**→**Port VLAN** to load the following page.

Port VLAN					
Port	Port	Port	Port	Port	Port
Network	Port	Port	Port	Port	Port
VLAN	Port	Port	VLAN1	VLAN2	Port

Back

Exit

Figure 3-23 Port VLAN

The following items are displayed on this screen:

➤ Port VLAN

Network: Displays the current logical network of the physical port.

VLAN: Select the desired VLAN for the port.



Tips:

The Port VLAN can only be created among the LAN ports.

3.2 Wireless

3.2.1 Wireless Setting

3.2.1.1 Wireless Setting

On this page you can configure the basic parameters of the wireless network.

Choose the menu **Wireless**→**Wireless Setting**→**Wireless Setting** to load the following page.

Wireless Setting

Wireless: ☒ Enabled ☐ Disabled

Region: United States

Warning: Channel 13 is a restricted channel and its use is prohibited in some countries. Please refer to the relevant regulations before use.

Channel: Automatic

Mode: 802.11n

Channel width: Automatic

Wireless Parameter

SSID: PLINK_1234567

BSSID: B8:17:97:17:18:07

SSID Broadcast: ☒ Enable ☐ Disable

AP Power on: ☐ Enable ☒ Disable

Security: WPA-PSK/TKIP

Auth Type: Automatic

Key type: Automatic

Key length: 128/256 bit

Group key update interval: 3600 sec
(The value is 3600 seconds by default.)

Save Exit

Figure 3-24 Wireless Setting

The following items are displayed on this screen:

➤ **Wireless Setting**

Wireless: Enable or disable the Wireless function.

Region: Select your region from the drop-down list. This field specifies the region where the wireless function of the Router can be used. It may be illegal to use the wireless function of the Router in a region other than one of those specified in this field. If your country or region is not listed, please contact your local government agency for assistance.

Channel: This field determines which operating frequency will be used. The default channel is **automatic** and the Router will choose the best channel automatically. It is not necessary to change the wireless channel unless you notice interference problems with another nearby access point.

Mode: Select the desired mode.

11b only - Select if all of your wireless clients are 802.11b.

11g only - Select if all of your wireless clients are 802.11g.

11n only - Select only if all of your wireless clients are 802.11n.

11bg mixed - Select if you are using both 802.11b and 802.11g wireless clients.

11bgn mixed - Select if you are using a mix of 802.11b, 11g, and 11n wireless clients.

Select the desired wireless mode. When 802.11b mode is selected, only 802.11b wireless stations can connect to the Router. When 802.11g mode is selected, only 802.11g wireless stations can connect to the Router. When 802.11n mode is selected, only 802.11n wireless stations can connect to the Router. It is strongly recommended that you set the Mode **11bgn mixed**, and all of 802.11b, 802.11g and 802.11n wireless stations can connect to the Router.

Channel Width: Select the channel width from the drop-down list. The default setting is **automatic**, which can adjust the channel width for your clients automatically.

➤ **Wireless Parameter**

SSID: Enter a name for the wireless network. The same name of SSID(Service Set Identification) must be assigned to all wireless device in your network. Considering your wireless network security, the default SSID is set to be TP-LINK_XXXXXX (XXXXXX indicates the last unique six numbers of each Router's MAC address). This value is case-sensitive. For example, TEST is NOT the same as test.

Description: Enter the description for the SSID.

SSID Broadcast: Enable or disable the SSID Broadcast. When wireless clients survey the local area for wireless networks to associate with, they will detect the SSID broadcast by the Router. If the SSID Broadcast is enabled, the Wireless Router will broadcast its name (SSID) on the air.

AP Isolation Enable or disable the AP Isolation. This function can isolate wireless stations on your network from each other. Wireless devices will be able to communicate with the Router but not with each other.

Security: Specify the security option of the wireless network. If you do not want to use wireless security, select "Disable Security", otherwise select one Security option from the drop-down list. It's strongly recommended to choose one of the security options to enable security.

There are three wireless security options supported by the Router: WPA-PSK/WPA2-PSK, WPA/WPA2 and WEP. It is recommend to choose WPA-PSK/WPA2-PSK.

The detail information of the three security options will be introduced below.

1) WPA-PSK/WPA2-PSK

It's the WPA/WPA2 authentication type based on pre-shared passphrase. The default security option of the router is WPA-PSK/WPA2-PSK.

Security:	<input type="text" value="WPA-PSK/WPA2-PSK"/>
Auth Type:	<input type="text" value="Automatic"/>
Encryption:	<input type="text" value="Automatic"/>
Password:	<input type="text" value="56358513"/> (You can enter ASCII characters between 8 and 63 or hexadecimal characters between 8 and 64.)
Group Key Update Period:	<input type="text" value="86400"/> Sec (The Min. value is 30, 0 means no update)

Auth Type: Choose the Auth type of the WPA-PSK/WPA2-PSK security on the drop-down list. The default setting is **Automatic**, which can select **WPA-PSK** (Pre-shared key of WPA) or **WPA2-PSK** (Pre-shared key of WPA) automatically based on the wireless station's capability and request.

Encryption: Select the Encryption type , including **Automatic**, **TKIP**, **AES**.
The default setting is **Automatic**, which can select **TKIP** (Temporal Key Integrity Protocol) or **AES** (Advanced Encryption Standard) automatically based on the wireless station's capability and request.

TKIP – TKIP is a security protocol used in the IEEE 802.11 wireless networking standard.

AES – AES is a specification for the encryption of electronic data established by the U.S. National Institute of Standards and Technology.

Password: Enter ASCII characters between 8 and 63 characters or 8 to 64 Hexadecimal characters. The default password is the same with the default PIN code, which is labeled on the bottom of the Router

Group Key Update Period: Specify the group key update interval in seconds. The value should be 30 or above. Enter 0 to disable the update.

2) WPA/WPA2

It's based on Radius Server.

Security:	WPA/WPA2
Auth Type:	Automatic
Encryption:	Automatic
Radius Server IP:	
Radius Port:	1812 (The default is 1812)
Radius Password:	
Group Key Update Period:	3600 Sec (The value is 0 means no update)

Auth Type: You can choose the Auth type of the WPA/WPA2 security on the drop-down list. The default setting is **Automatic**, which can select **WPA** (Wi-Fi Protected Access) or **WPA2** (WPA version 2) automatically based on the wireless station's capability and request.

Encryption:

Select the Encryption type, which including **Automatic**, **TKIP**, **AES**.

The default setting is **Automatic**, which can select **TKIP** (Temporal Key Integrity Protocol) or **AES** (Advanced Encryption Standard) automatically based on the wireless station's capability and request.

TKIP – TKIP is a security protocol used in the IEEE 802.11 wireless networking standard.

AES – AES is a specification for the encryption of electronic data established by the U.S. National Institute of Standards and Technology.

Radius Server IP:

Enter the IP address of the Radius server.

Radius Port:

Enter the port number of the Radius server.

Radius Password:

Enter the password for the Radius server.

Group Key Update Period:

Specify the group key update interval in seconds. The value should be 30 or above. Enter 0 to disable the update.

3) WEP

It is based on the IEEE 802.11 standard.

Security	WEP	
Auth Type	Automatic	
Key Type	Dynamic	
Key Selection	WEP Key	Key Type
Key 1	<input type="text"/>	Dynamic
Key 2	<input type="text"/>	Dynamic
Key 3	<input type="text"/>	Dynamic
Key 4	<input type="text"/>	Dynamic

Auth Type:

You can choose the Auth type of the WPA/WPA2 security on the drop-down list. The default setting is **Automatic**, which can select **WPA** (Wi-Fi Protected Access) or **WPA2** (WPA version 2) automatically based on the wireless station's capability and request.

Key Format: **Hexadecimal** and **ASCII** formats are provided . **Hexadecimal** format stands for any combination of hexadecimal digits (0-9, a-f, A-F) in the specified length. **ASCII** format stands for any combination of keyboard characters in the specified length.

Key Selected: You can select the key based on need.

WEP Key: Select which of the four keys will be used and enter the matching WEP key that you create. Make sure these values are identical on all wireless stations in your network.

Key Type: You can select the WEP key length (64-bit, or 128-bit, or 152-bit.) for encryption. "Disabled" means this WEP key entry is invalid.

64-bit - You can enter 10 hexadecimal digits (any combination of 0-9, a-f, A-F, zero key is not promoted) or 5 ASCII characters.

128-bit - You can enter 26 hexadecimal digits (any combination of 0-9, a-f, A-F, zero key is not promoted) or 13 ASCII characters.

152-bit - You can enter 32 hexadecimal digits (any combination of 0-9, a-f, A-F, zero key is not promoted) or 16 ASCII characters.



Tips:

- The modification of the Wireless Setting will take effect only after the router is rebooted.
- The WEP Auth type is not supported by 802.11n mode.
- The TKIP is not supported by 802.11n mode. The TKIP cannot be selected if 11n only mode is selected. The router will not work in 11n mode if bgn mixed mode and TKIP encryption are both selected. TKIP is an encryption option of the WPA-PSK/WPA2-PSK2 and WPA/WPA2 Auth type.

3.2.1.2 Multi-SSID

On this page you can configure the Multi-SSID..

Choose the menu **Wireless**→**Wireless Setting**→**Multi-SSID** to load the following page.

General

Multi-SSID: ☒ Enable ☐ Disable
SSID Insulation: ☒ Enable ☐ Disable







Save

Multi-SSID Config

SSID:
Description:
Security:
Auth Type:
Encryption:
PSK Password:
(You can enter ASCII characters between 8 and 63 or hexadecimal characters between 8 and 64.)
Group Key Update Period: Sec
(The Min. value is 30, 0 means no update)
SSID Broadcast: ☒ Enable ☐ Disable
Guest Network: ☐ Enable ☒ Disable
AP Isolation: ☐ Enable ☒ Disable
Enable/Disable this SSID: ☒ Enable ☐ Disable

Add
Clear
Help

Multi-SSID List

No.	SSID	Description	Security Option	Status	Action
<input type="checkbox"/> 1	TP-LINK_fffff	TP-LINK_fffff	Disable Security	Enabled	  
<input type="checkbox"/> 2	zhangsan	1	WPA-PSK/WPA2-PSK	Enabled	  

Select All Enable Disable Delete

Figure 3-25 Multi-SSID

The following items are displayed on this screen:

➤ **General**

Multi-SSID: Enable or disable the Multi-SSID. You can establish multiple wireless networks if Multi-SSID is enabled.

SSID Insulation: Enable or disable the SSID Insulation. If enabled, the hosts accessing to the different SSID cannot be communicate with each other.

➤ **Multi-SSID Config**

SSID: Specify a name for the wireless network.

Description: Enter a description for this SSID.

Security:

Specify the security option of the wireless network. If you do not want to use wireless security, select "Disable Security", otherwise select one Security option from the drop-down list. It's strongly recommended to choose one of the security options to enable security.

There are three wireless security options supported by the Router: WPA-PSK/WPA2-PSK, WPA/WPA2 and WEP. It is recommend to choose WPA-PSK/WPA2-PSK.

The detail information of the three security options will be introduced below.

SSID Broadcast:

Enable or disable the SSID Broadcast. If you enable the SSID Broadcast , the Wireless Router will broadcast its name (SSID) on the air.

Guest Network:

Enable or disable the Guest Network. If the Guest Network is enabled, the hosts in this network cannot communicate with the LAN port or other SSIDs.

AP Isolation:

This function can isolate wireless stations on your network from each other. Wireless devices will be able to communicate with the Router but not with each other.

Enable/Disable this SSID

Enable or disable this SSID. If you select this option, the host which passed the validation will be allowed to connect to this SSID; otherwise, the Router will refuse this host's request.

1) WPA-PSK/WPA2-PSK

It's the WPA/WPA2 authentication type based on pre-shared passphrase.

Security:	<input type="text" value="WPA-PSK/WPA2-PSK"/>
Auth Type:	<input type="text" value="Automatic"/>
Encryption:	<input type="text" value="Automatic"/>
Password:	<input type="text"/> (You can enter ASCII characters between 8 and 63 or hexadecimal characters between 8 and 64.)
Group Key Update Period:	<input type="text" value="86400"/> Sec (The Min. value is 30, 0 means no update)

Auth Type:

Choose the Auth type of the WPA-PSK/WPA2-PSK security on the drop-down list. The default setting is **Automatic**, which can select **WPA-PSK** (Pre-shared key of WPA) or **WPA2-PSK** (Pre-shared key of WPA) automatically based on the wireless station's capability and request.

Encryption:

Select the Encryption type, which including **Automatic**, **TKIP**, **AES**.

The default setting is **Automatic**, which can select **TKIP** (Temporal Key Integrity Protocol) or **AES** (Advanced Encryption Standard) automatically based on the wireless station's capability and request.

TKIP – TKIP is a security protocol used in the IEEE 802.11 wireless networking standard.

AES – AES is a specification for the encryption of electronic data established by the U.S. National Institute of Standards and Technology.

Password:

Enter ASCII characters between 8 and 63 characters or 8 to 64 Hexadecimal characters.

Group Key Update Period:

Specify the group key update interval in seconds. The value should be 30 or above. Enter 0 to disable the update.

2) WPA/WPA2

It's based on Radius Server.

Security:	WPA/WPA2
Auth Type:	Automatic
Encryption:	Automatic
Radius Server IP:	
Radius Port:	1812 (The default port is 1812)
Radius Password:	
Group Key Update Period:	3600 Sec (The default is 3600 seconds, please)

Auth Type:

You can choose the Auth type of the WPA/WPA2 security on the drop-down list. The default setting is **Automatic**, which can select **WPA** (Wi-Fi Protected Access) or **WPA2** (WPA version 2) automatically based on the wireless station's capability and request.

Encryption: Select the Encryption type. which including **Automatic**, **TKIP**, **AES**.

The default setting is **Automatic**, which can select **TKIP** (Temporal Key Integrity Protocol) or **AES** (Advanced Encryption Standard) automatically based on the wireless station's capability and request.

TKIP – TKIP is a security protocol used in the IEEE 802.11 wireless networking standard.

AES – AES is a specification for the encryption of electronic data established by the U.S. National Institute of Standards and Technology.

Radius Server IP: Enter the IP address of the Radius server.

Radius Port: Enter the port number of the Radius server.

Radius Password: Enter the password for the Radius server.

Group Key Update Period: Specify the group key update interval in seconds. The value should be 30 or above. Enter 0 to disable the update.

3) WEP

It is based on the IEEE 802.11 standard.

Security	WEP		
Auth Type	Automatic		
Key Format	Hexadecimal		
Key 1	00000000	Key 2	00000000
Key 3	00000000	Key 4	00000000
Key 5	00000000	Key 6	00000000
Key 7	00000000	Key 8	00000000
Key 9	00000000	Key 10	00000000
Key 11	00000000	Key 12	00000000
Key 13	00000000	Key 14	00000000
Key 15	00000000	Key 16	00000000

Auth Type: You can choose the Auth type of the WPA/WPA2 security on the drop-down list. The default setting is **Automatic**, which can select **WPA** (Wi-Fi Protected Access) or **WPA2** (WPA version 2) automatically based on the wireless station's capability and request.

Key Format: **Hexadecimal** and **ASCII** formats are provided. **Hexadecimal** format stands for any combination of hexadecimal digits (0-9, a-f, A-F) in the specified length. **ASCII** format stands for any combination of keyboard characters in the specified length.

- Key Selected:** You can select the key based on need.
- WEP Key:** Select which of the four keys will be used and enter the matching WEP key that you create. Make sure these values are identical on all wireless stations in your network.
- Key Type:** You can select the WEP key length (64-bit, or 128-bit, or 152-bit.) for encryption. "Disabled" means this WEP key entry is invalid.
- 64-bit** - You can enter 10 hexadecimal digits (any combination of 0-9, a-f, A-F, zero key is not promoted) or 5 ASCII characters.
- 128-bit** - You can enter 26 hexadecimal digits (any combination of 0-9, a-f, A-F, zero key is not promoted) or 13 ASCII characters.
- 152-bit** - You can enter 32 hexadecimal digits (any combination of 0-9, a-f, A-F, zero key is not promoted) or 16 ASCII characters.



Tips:

- The parameters of the host which desires to connect to the router must be the same as the parameter configured here.
- The WEP Auth type is not supported by 802.11n mode.
- The TKIP is not supported by 802.11n mode. The TKIP cannot be selected if 11n only mode is selected. The router will not work in 11n mode If bgn mixed mode and TKIP encryption are both selected. TKIP is a encryption option of the WPA-PSK/WPA2-PSK2 and WPA/WPA2 Auth type.

> List of Group

In this table, you can view the information of the multi-SSID and edit them by the Action buttons.

The first entry in Figure 3-25 cannot be configured here. To edit it, please go to **3.2.1.1 Wireless Setting**.



Tips:

- The WDS function will be disabled if Multi-SSID is enabled.
- UP to 7 new SSIDs can be added to the router.
- The router allows only one SSID to use WEP Auth.

3.2.1.3 WDS

With the WDS function, the Router can bridge two or more WLANs.

Choose the menu **Wireless**→**Wireless Setting**→**WDS** to load the following page.

The screenshot shows the WDS Configuration page. It has two tabs: 'General' and 'Parameter'. The 'General' tab is active, showing 'WDS' status as 'Enable' with a 'Scan' button. The 'Parameter' tab is also visible, showing fields for 'SSID(to be bridged):', 'BSSID(to be bridged):', 'Key Type:' (WEP-ASCII/WEP-HEX), 'WEP Key Index:' (1), 'Auth Type:' (Open System), and 'Key:' (123456). There are 'Save' and 'Cancel' buttons at the bottom.

Figure 3-26 WDS Configuration

➤ **General**

WDS: Enable or disable the WDS function. With this function, the Router can bridge two or more WLANs.

Scan: Click this button; you can search the AP which runs in the current channel.

➤ **Parameter**

SSID(to be bridged): The SSID of the AP your Router is going to connect to as a client. You can also use the search function to select the SSID to join.

BSSID(to be bridged): The BSSID of the AP your Router is going to connect to as a client. You can also use the search function to select the BSSID to join.

Key Type: This option should be chosen according to the AP's security configuration. It is recommended that the security type is the same as your AP's security type

WEP Key Index: This option should be chosen if the key type is WEP (ASCII) or WEP (HEX).It indicates the index of the WEP key.

Auth Type: This option should be chosen if the key type is WEP (ASCII) or WEP (HEX).It indicates the authorization type of the Root AP.

Key : If the AP your Router is going to connect needs password, you need to fill the key in this blank.



Tips:

The Multi-SSID function will be disabled if WDS is enabled.

3.2.1.4 Wireless Advanced

On this page, you can configure the wireless advanced parameters.

Choose the menu **Wireless**→**Wireless Setting**→**Wireless Advanced** to load the following page.

General

WMM: ☒ Enable ☐ Disable

Short GI: ☒ Enable ☐ Disable

Wireless Advanced

Transmit Power: High

Power Constraint: 0% 100-150%

PI2 Level: 2946 (0-2946)

Frequency Band Threshold: 7.000 175.7-17000

Data Rate Mode: 1 (0-255)

Save Cancel

Figure 3-27 Wireless Advanced

➤ **General**

WMM: **WMM** function can guarantee the packets with high- priority messages being transmitted preferentially. It is strongly recommended enabled.

Short GI: This function is recommended for it will increase the data capacity by reducing the guard interval time.

➤ **Wireless Advanced**

Transmit Power: Here you can specify the transmit power of Router. You can select High, Middle or Low which you would like. High is the default setting and is recommended.

Beacon Interval:

Enter a value between 40-1000 milliseconds for Beacon Interval here. The beacons are the packets sent by the router to synchronize a wireless network. Beacon Interval value determines the time interval of the beacons. The default value is 100.

RTS Threshold:

Here you can specify the RTS (Request to Send) Threshold. If the packet is larger than the specified RTS Threshold size, the router will send RTS frames to a particular receiving station and negotiate the sending of a data frame. The default value is 2346.

Fragmentation Threshold:

This value is the maximum size determining whether packets will be fragmented. Setting the Fragmentation Threshold too low may result in poor network performance since excessive packets. 2346 is the default setting and is recommended.

DTIM Interval:

This value determines the interval of the Delivery Traffic Indication Message (DTIM). A DTIM field is a countdown field informing clients of the next window for listening to broadcast and multicast messages. When the Router has buffered broadcast or multicast messages for associated clients, it sends the next DTIM with a DTIM Interval value. You can specify the value between 1-255 Beacon Intervals. The default value is 1, which indicates the DTIM Interval is the same as Beacon Interval.

**Tips:**

The modification of the Wireless Advanced will take effect only after the router is rebooted.

3.2.2 MAC Filtering

On this page, you can control the wireless access by configuring the MAC Filtering.

Choose the menu User **Wireless**→**MAC Filtering** to load the following page.

General

SSID: TP-LINK_FFFFFF

☐ Enable Wireless MAC Address Filtering

☐ Allow the MAC address in the rule list to access the local wireless network.

☒ Deny the MAC address in the rule list to access the local wireless network.

Save

Filtering Rules

MAC Address:

Description: (Optional)

Add

Clear

Help

Rule List

No.	MAC Address	Description	Action
<input type="checkbox"/> 1	11-22-DD-FF-33-44	1	

Select All Delete Search

Figure 3-28 MAC Filtering

➤ General

Each SSID can be configured the MAC Address Filtering rules. You can select a SSID in the **SSID** drop-down list. To create a new SSID, please refer to **3.2.1.2 Multi-SSID**.

To control some of the hosts to access the wireless network, it is recommended to select “**Enable Wireless MAC Address Filtering**” and select one filtering rule according to need.

Click <Save> button to apply the setting.

➤ Filtering Rules

MAC Address: Enter the MAC Address of the host to be filtered.

Description: Enter a description for the entry. Up to 28 characters can be entered.

➤ Rule List

In this table, you can view the information of the Filtering Rules and edit them by the Action buttons.

3.2.3 Host Status

On this page, you can view the information of all the hosts connected to the wireless network.

Choose the menu User **Wireless**→**Host Status** to load the following page.

General									
Host List		ALL		OK					
Host Status									
No.	MAC Address	SSID	Current Status	Received Packets	Transmitted Packets	Bytes Tx (Byte)	Bytes Rx (Byte)	Rate Tx (KB/s)	Rate Rx (KB/s)
1	4C-9D-83-7D-DA-73	TP-LINK_618BC4	WiFi	43349572	429496	174467440	1244674	20	30
2	00-1D-FE-02-8B-F0	TP-LINK_618BC4	STA-ASSOC	423696	672992	429423	229492	12.2	38.9
The amount of current connected hosts: 2									
				Refresh	Delete	Help			

Figure 3-29 Host Status

➤ General

Select a SSID, the status of the host in this wireless network will display on the following table.

➤ Host Status

- MAC Address:** Displays the MAC address of the host which access the Router by wireless connection.
- SSID:** Displays the name of the SSID to which the host connects.
- Current Status:** Displays the Status of the wireless connection.
- Received Packets:** Displays the total packets received by the host.
- Transmitted Packets:** Displays the total packets transmitted by the host.
- Bytes Tx:** Displays the total bytes transmitted by the host.
- Bytes Rx:** Displays the total bytes received by the host.
- Rate Tx:** Displays the rate for transmitting data frames.
- Rate Rx:** Displays the rate for receiving data frames.

3.3 User Group

The User Group function is used to group different users for unified management, so that you can perform other applications such as Bandwidth Control, Session Limit, and Access Control etc. on per group.

3.3.1 Group

On this page you can define the group for management.

Choose the menu **User Group**→**Group** to load the following page.

Group Config

Group Name:

(1-32 Characters)

Add

Description:

(Optional, 1-200 Characters)

Clear

Save

List of Group

No.	Group Name	Description	Action
1	Group		

View All

Delete

Search

Figure 3-30 Group Configuration

The following items are displayed on this screen:

➤ **Group Config**

Group Name: Specify a unique name for the group.

Description: Give a description for the group. It's optional.

➤ **List of Group**

In this table, you can view the information of the Groups and edit them by the Action buttons.

3.3.2 User

On this page, you can configure the User for the group.

Choose the menu **User Group**→**User** to load the following page.

User Config

User Name:

(1-32 Characters)

Add

IP Address:

Clear

Description:

(Optional, 1-200 Characters)

Save

List of User

No.	User Name	IP Address	Description	Action
No member				

View All

Delete

Search

Search

Figure 3-31 User Configuration

The following items are displayed on this screen:

➤ **User Config**

User Name: Specify a unique name for the user.

IP Address: Enter the IP Address of the user. It cannot be the network address or broadcast address of the port.

Description: Give a description to the user for identification. It's optional.

➤ **List of User**

In this table, you can view the information of the Users and edit them by the Action buttons.

3.3.3 View

On this page, you can configure the User View or Group View.

Choose the menu **User Group**→**View** to load the following page.

The screenshot shows the 'View Config' dialog box with the 'Group' tab selected. The 'Group Name' is 'Group1'. The 'Group Structure' button is highlighted. The 'Group Members' list on the left includes 'Joan1' through 'Joan12'. The 'Grouped Members' list on the right is empty. The 'Save' and 'Apply' buttons are at the top right.

Figure 3-32 View Configuration

The following items are displayed on this screen:

➤ **View Config**

View: Select the desired view for configuration.

User Name: Select the name of the desired User.

Available Group: Displays the Groups that the User can join.

Selected Group: Displays the Groups to which this User belongs.

Group Name: Select the name of the desired Group.

- Group Structure:** Click this button to view the tree structure of this group. All the members of this group will be displayed, including Users and sub-Groups. The Group Names are displayed in bold.
- Available Member:** Displays the Users and the Groups which can be added into this group.
- Selected Member:** Displays the members of this group, including Users and Groups.

3.4 Advanced

3.4.1 NAT

NAT (Network Address Translation) is the translation between private IP and public IP, which allows private network users to visit the public network using private IP addresses.

With the explosion of the Internet, the number of available IP addresses is not enough. NAT provides a way to allow multiple private hosts to access the public network with one public IP at the same time, which alleviates the shortage of IP addresses. Furthermore, NAT strengthens the LAN (Local Area Network) security of the network since the address of LAN host never appears on the Internet.

3.4.1.1 NAT Setup

On this page, you can set up the NAT function.

Choose the menu **Advanced**→**NAT**→**NAT Setup** to load the following page.

Figure 3-33 NAT Setup

The following items are displayed on this screen:

> NAT

Source Port Range: Enter the source port range between 2049 and 65000, the span of which must be not less than 100.

> NAT-DMZ

NAT-DMZ: Enable or disable NAT-DMZ. NAT DMZ is a special service of NAT application, which can be considered as a default forwarding rule. When NAT DMZ (Pseudo DMZ) is enabled, all the data initiated by external network falling short of the current connections or forwarding rules will be forwarded to the preset NAT DMZ host.

Host IP Address: Enter the IP address of the host specified as NAT DMZ server.

3.4.1.2 One-to-One NAT

On this page, you can configure the One-to-One NAT.

Choose the menu **Advanced**→**NAT**→**One-to-One NAT** to load the following page.

Figure 3-34 One to One NAT

The following items are displayed on this screen:

➤ One-to-One NAT

Mapping IP Address: Enter the Original IP Address in the first checkbox and Translated IP Address in the second checkbox. TL-ER604W allows mapping from LAN port to WAN port in LAN Mode.

Interface: Select an interface for forwarding data packets.

DMZ Forwarding: Enable or disable DMZ Forwarding. The packets transmitted to the Translated IP Address will be forwarded to the host of Original IP if DMZ Forwarding is enabled.

Description: Give a description for the entry.

Status: Activate or inactivate the entry.

➤ **List of Rules**

In this table, you can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-34 indicates: The IP address of host1 in local network is 192.168.0.128 and the WAN IP address after NAT mapping is specified to be 222.135.48.128. The data packets are transmitted from WAN1 port. DMZ Forwarding and this entry are both activated.



Note:

One-to-One NAT entries take effect only when the Connection Type of WAN is Static IP. Changing the Connection type from Static IP to other ones will make the entries attached to the interface disabled.

3.4.1.3 Multi-Nets NAT

Multi-Nets NAT function allows the IP under LAN port within multiple subnets to access the Internet via NAT.

Choose the menu **Advanced**→**NAT**→**Multi-Nets NAT** to load the following page.

Figure 3-35 Multi-Nets NAT

The following items are displayed on this screen:

➤ **Multi-Nets NAT**

Subnet/Mask: Enter the subnet/mask to make the address range for the entry.

Description: Give a description for the entry.

Status: Activate or inactivate the entry.

➤ **list of Rules**

You can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-35 indicates that: This is a Multi-Nets NAT entry named tmlink1. The subnet under the LAN port of the Router is 192.168.2.0/24 and this entry is activated. After the corresponding Static Route entry is set, the hosts within this subnet can access the Internet through the Router via NAT.



Note:

- Multi-Nets NAT entry takes effect only when cooperating with the corresponding Static Route entries.
- For detailed setting of subnet mask, please refer to the **Appendix BFAQ**

Application Example:

Network Requirements

The LAN subnet of TL-ER604W is 192.168.0.0 /24, the subnet of VLAN2 under a three layer switch is 192.168.2.0 /24, while the subnet of VLAN3 is 192.168.3.0 /24. The IP of VLAN for cascading the switch to the Router is 192.168.0.2. Now the hosts within VLAN2 and VLAN3 desire to access the Internet.

The network topology is shown as the following:









Configuration procedure

1. Establish the Multi-Nets NAT entries with Subnet/Mask of VLAN2 and VLAN3.

Multi-Nets NAT			
Subnet/Mask	192.168.2.0	/24	<input type="button" value="Add"/> <input type="button" value="Delete"/> <input type="button" value="Help"/>
Interface	LAN		
Description	VLAN2	(Optional)	
Status	<input checked="" type="radio"/> Active <input type="radio"/> Inactive		

The configured entries are as follows:







List of Rules						
	No.	Destination Address	Interface	Description	Status	Control
<input type="checkbox"/>	1	1.0.0.0/8	LAN	DMZ	Active	  
<input type="checkbox"/>	2	192.0.0.0/8	LAN	DMZ	Active	  

- Then set the corresponding Static Route entry, enter the IP address of the interface connecting the Router and the three layer switch into the Next Hop field.

Choose the menu **Advanced**→**Routing**→**Static Route** to load the following page.

Static Route	
Destination:	192.0.0.0
Subnet Mask:	255.255.255.0
Next Hop:	192.0.0.1
Interface:	eth1 <input checked="" type="checkbox"/>
Metric:	0 (0-100)
Description:	DMZ (Optional)
Status:	<input checked="" type="radio"/> Active <input type="radio"/> Inactive

The Static Route entry is as follows:

List of Rules									
	No.	Destination	Subnet Mask	Next Hop	Interface	Metric	Status	Description	Control
<input type="checkbox"/>	1	192.0.0.0	255.255.255.0	192.0.0.1	eth1	0	Active	DMZ	  
<input type="checkbox"/>	2	1.0.0.0/8	255.255.255.0	1.0.0.0/8	LAN	0	Active	DMZ	  

3.4.1.4 Virtual Server

Virtual server sets up public services in your private network, such as DNS, Email and FTP, and defines a service port. All the service requests to this port will be transmitted to the LAN server appointed by the Router via IP address.

Choose the menu **Advanced**→**NAT**→**Virtual Server** to load the following page.

Virtual Server

Name:

Interface:

External Port: -

Internal Port: -

Protocol:

Internal Server IP:

Status: ☒ Activate ☐ Inactivate

List of Rules

No.	Name	Interface	Protocol	External Port	Internal Port	Internal Server IP	Status	Action
<input type="checkbox"/> 1	host	WAN1	TCP/UDP	65534-65535	65534-65535	192.168.0.103	Active	

Select All Activate Inactivate Delete Search

Figure 3-36 Virtual Server

The following items are displayed on this screen:

➤ **Virtual Server**

Name: Enter a name for Virtual Server entries. Up to 28 characters can be entered.

Interface: Select an interface for forwarding data packets.

External Port: Enter the service port or port range the Router provided for accessing external network. All the requests from Internet to this service port or port range will be redirected to the specified server in local network.

Internal Port: Specify the service port of the LAN host as virtual server.

Protocol: Specify the protocol used for the entry.

Internal Server IP: Enter the IP address of the specified internal server for the entry. All the requests from the Internet to the specified LAN port will be redirected to this host.

Status: Activate or inactivate the entry.



Note:

- The External port and Internal Port should be set in the range of 1-65535.
- The external ports of different entries should be different, whereas the internal ports can be the same.

➤ List of Rules

In this table, you can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-36 indicates: This is a Virtual Server entry named host, all the TCP data packets from WAN1 to port 65534-65535 of the Router will be redirected to the port 65534-65535 of the LAN host with IP address of 192.168.0.103, and this entry is activated.

3.4.1.5 Port Triggering

Some applications require multiple connections, such as Internet games, video conferencing, Internet calling, P2P download and so on. Port Triggering is used for those applications requiring multiple connections.

When an application initiates a connection to the trigger port, all the ports corresponding to the incoming port will open for follow-up connections.

Choose the menu **Advanced**→**NAT**→**Port Triggering** to load the following page.

Port Triggering								
No.	Name	Interface	Trigger Protocol	Trigger Port	Incoming Protocol	Incoming Port	Status	Action
1	host1	WAN1	TCP	5354	TCP/UDP	5355	Active	

Figure 3-37 Port Triggering

The following items are displayed on this screen:

➤ Port Triggering

Name: Enter a name for Port Triggering entries. Up to 28 characters can be entered.

Interface: Select an interface for forwarding data packets.

Trigger Port: Enter the trigger port number or the range of port. Only when the trigger port initiates connection will all the corresponding incoming ports open and provide service for the applications, otherwise the incoming ports will not open.

Trigger Protocol:	Select the protocol used for trigger port.
Incoming Port:	Enter the incoming port number or range of port numbers. The incoming port will open for follow-up connection after the trigger port initiates connection.
Incoming Protocol:	Select the protocol used for incoming port.
Status:	Activate or inactivate the entry.



Note:

- The Trigger Port and Incoming Port should be set in the range of 1-65535. The Incoming Port can be set in a continuous range such as 8690-8696.
- The Router supports up to 16 Port Triggering entries. Each entry supports at most 5 groups of trigger ports and overlapping between the ports is not allowed.
- Each entry supports at most 5 groups of incoming ports and the sum of incoming ports you set for each entry should not be more than 100.

➤ List of Rules

In this table, you can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-37 indicates that: This is a Port Triggering entry named host1, When the LAN host initiates a TCP request via port of 5354, the incoming port 5355 of WAN1 will open for TCP and UDP protocol. This entry is activated.

3.4.1.6 ALG

Some special protocols such as FTP, H.323, SIP, IPsec and PPTP will work properly only when ALG (Application Layer Gateway) service is enabled.

Choose the menu **Advanced**→**NAT**→**ALG** to load the following page.

ALG	
HTTP	<input checked="" type="radio"/> enable <input type="radio"/> disable
H.323	<input type="radio"/> enable <input checked="" type="radio"/> disable
SIP	<input checked="" type="radio"/> enable <input type="radio"/> disable
IPsec	<input type="radio"/> enable <input checked="" type="radio"/> disable
PPTP	<input checked="" type="radio"/> enable <input type="radio"/> disable

Figure 3-38 ALG

The following items are displayed on this screen:

➤ ALG

FTP ALG: Enable or disable FTP ALG. The default setting is enabled. It is recommended to keep the default setting if no special requirement.

H.323 ALG: Enable or disable H.323 ALG. The default setting is enabled. H.323 is used for various applications such as NetMeeting and VoIP.

SIP ALG: Enable or disable SIP ALG. The default setting is enabled. It is recommended to keep the default setting if no special requirement.

IPsec ALG: Enable or disable IPsec ALG. The default setting is enabled. It is recommended to keep default if no special requirement.

PPTP ALG: Enable or disable PPTP ALG. The default setting is enabled. It is recommended to keep default if no special requirement.

3.4.2 Traffic Control

Traffic Control functions to control the bandwidth by configuring rules for limiting various data flows. In this way, the network bandwidth can be reasonably distributed and utilized.

3.4.2.1 Setup

Choose the menu **Advanced**→**Traffic Control**→**Setup** to load the following page.

General

☒ Disable bandwidth control

☐ enable bandwidth control all items

☐ enable bandwidth control enable bandwidth configuration by %

Default Limit

Direction	Limited Bandwidth (Kbps)
Upstream	<input type="text" value="0"/>
Downstream	<input type="text" value="0"/>

Interface Bandwidth

Interface	Upstream Bandwidth (Kbps)	Downstream Bandwidth (Kbps)
WAN	<input type="text" value="0"/>	<input type="text" value="0"/>
LAN	<input type="text" value="0"/>	<input type="text" value="0"/>
Total	<input type="text" value="0"/>	<input type="text" value="0"/>

Figure 3-39 Configuration

The following items are displayed on this screen:

➤ **General**

Disable Bandwidth Control: Select this option to disable Bandwidth Control.

Enable Bandwidth Control all the time: Select this option to enable Bandwidth Control all the time.

Enable Bandwidth Control When: With this option selected, the Bandwidth Control will take effect when the bandwidth usage reaches the specified value.

➤ **Default Limit**

Limited Bandwidth: Default Limit applies only for users that are not constrained by Bandwidth Control Rules. These users share certain bandwidth with upper limit configured here. Value 0 means all the remained bandwidth is available to use.

➤ **Interface Bandwidth**

Interface: Displays the current enabled WAN port(s). The Total bandwidth is equal to the sum of bandwidth of the enabled WAN ports.

Upstream Bandwidth: Displays the bandwidth of each WAN port for transmitting data. The Upstream Bandwidth of WAN port can be configured on **WAN** page.

Downstream Bandwidth: Displays the bandwidth of each WAN port for receiving data. The Downstream Bandwidth of WAN port can be configured on **WAN** page.



Note:

- The Upstream/Downstream Bandwidth of WAN port you set must not be more than the bandwidth provided by ISP. Otherwise the Traffic Control will be invalid.
- If there are data flowing into the Router from interface A and out from interface B while the downstream bandwidth of A is different from the upstream bandwidth of B, then the smaller one should be considered as the effective bandwidth, and vice versa.
- Click the <View IP Traffic Statistics> button to jump to IP Traffic Statistics page.

3.4.2.2 Bandwidth Control

On this page, you can configure the Bandwidth Control function.

Choose the menu **Advanced**→**Traffic Control**→**Bandwidth Control** to load the following page.

Bandwidth Control Rule

Direction: LAN -> WAN

Group: group1

Mode: ☒ Individual ☐ Shared

Guaranteed Bandwidth (Up): 10 Kbps (0-1000000, 0 means no limit)

Limited Bandwidth (Up): 0 Kbps (0 or 10-1000000, 0 means no limit)

Guaranteed Bandwidth (Down): 10 Kbps (0-1000000)

Limited Bandwidth (Down): 0 Kbps (0 or 10-1000000, 0 means no limit)

Effective Time: 08:00 ~ 24:00

Days: ☒ Sun ☒ Mon ☒ Tue ☒ Wed ☒ Thu ☒ Fri ☒ Sat

Description: (Optional)

Status: ☒ Active ☐ Inactive

List of Rules

No.	Direction	Group	Mode	Guaranteed Up	Limited Up	Guaranteed Down	Limited Down	Effective Time	Status	Description	Action
1	LAN -> WAN	wan	Shared	1000	10000	5000	10000	08:00-24:00 Mon Tue Wed Thu Fri	Active	root	

Select All Activate Inactivate Delete Search

Figure 3-40 Bandwidth Control

The following items are displayed on this screen:

➤ **Bandwidth Control Rule**

Direction: Select the data stream direction for the entry. The direction of arrowhead indicates the data stream direction. WAN-ALL means all WAN ports through which the data flow might pass. Individual WAN port cannot be selected if WAN-ALL rules are added.

Group: Select the group to define the controlled users.

Mode: Individual: The bandwidth of each user equals to the current bandwidth of this entry.
Shared: The total bandwidth of all controlled IP addresses equals to the current bandwidth of this entry.

Guaranteed Bandwidth (Up): Specify the Guaranteed Upstream Bandwidth for this entry.

Limited Bandwidth (Up): Specify the Limited Upstream Bandwidth for this entry.

Guaranteed Bandwidth (Down): Specify the Guaranteed Downstream Bandwidth for this entry.

Limited Bandwidth (Down):	Specify the Limited Downstream Bandwidth for this entry.
Effective Time:	Specify the time for the entry to take effect.
Description:	Give a description for the entry.
Status:	Activate or inactivate the entry.

➤ List of Rules

You can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-40 indicates: The users within group “group1” share the bandwidth and the Downstream/Upstream Guaranteed Bandwidth is 5000kbps, while the Downstream/Upstream Limited bandwidth is 10000kbps. This entry takes effect at 8 a.m. to 10 p.m. from Monday to Friday.



Note:

- The premise for single rule taking effect is that the bandwidth of the interface for this rule is sufficient and not used up.
- It is impossible to satisfy all the guaranteed bandwidth if the total guaranteed bandwidth specified by all Bandwidth Control rules for certain interface exceeds the physical bandwidth of this interface.

3.4.3 Session Limit

The amount of TCP and UDP sessions supported by the Router is finite. If some local hosts transmit too many TCP and UDP sessions to the public network, the communication quality of the other local hosts will be affected, thus it is necessary to limit the sessions of those hosts.

3.4.3.1 Session Limit

On this page, you can configure the session limit to specified PCs.

Choose the menu **Advanced**→**Session Limit**→**Session Limit** to load the following page.

General

☐ Enable Session Limit Save

Session Limit

Group: group2 Add

Max Sessions: (30-1000) Clear

Description: (Optional) Help

Status: ☒ Activate ☐ Inactivate

List of Session Limit

No.	Group	Max Sessions	Status	Description	Action
<input type="checkbox"/> 1	Group1	100	Active	host1	

Select All
Activate
Inactivate
Delete
Search

Figure 3-41 Session Limit

The following items are displayed on this screen:

➤ **General**

Enable Session Limit:

Check here to enable Session Limit, otherwise all the Session Limit entries will be disabled.

➤ **Session Limit**

Group:

Select a group to define the controlled users.

Max. Sessions:

Enter the max. Sessions for the users.

Description:

Give a description for the entry.

Status:

Activate or inactivate the entry.

➤ **List of Session Limit**

You can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-41 indicates: The amount of maximum sessions for the hosts within group1 is 100 and this entry is enabled.

3.4.3.2 Session List

On this page, you can view the Session Limit information of hosts configured with Session Limit.

Choose the menu **Advanced**→**Session Limit**→**Session List** to load the following page.

List of Limited Sessions			
Row	User	Max Sessions	Current Session
No. of rows			
<div>Refresh</div> <div>Save</div> <div>Del</div>			

Figure 3-42 Session List

In this table, you can view the session limit information of users configured with Session Limit. Click the <Refresh> button to get the latest information.

3.4.4 Load Balance

In this part, you can configure the traffic sharing mode of the WAN ports to optimize the resource utilization.

3.4.4.1 Configuration

Choose the menu **Advanced**→**Load Balance**→**Configuration** to load the following page.

General	
<input checked="" type="checkbox"/> Enable Application Optimized Routing	<div>Save</div>
<input checked="" type="checkbox"/> Enable Bandwidth Based Balance Routing	<div>Apply</div>
Select Enabled Bandwidth Based Balance Routing WAN	
<input type="radio"/> WAN	<input type="radio"/> WAN

Figure 3-43 Configuration

With the box before **Enable Application Optimized Routing** checked, the Router will consider the source IP address and destination IP address of the packets as a whole and record the WAN port they pass through. And then the packets with the same source IP address and destination IP address or destination port will be forwarded to the recorded WAN port. This feature is to ensure the multi-connected applications to work properly.

Check the box before **Enable Bandwidth Based Balance Routing** and select the WAN port below, Load Balance of the specified WAN port will be enabled automatically if no routing rules are set.

Then click the <Save> button to apply.



Note:

The WAN ports not connecting to the Internet don't support Intelligent Balance, please do not select them.

3.4.4.2 Policy Routing

Policy Routing provides an accurate way to control the routing based on the policy defined by the network administrator.

Choose the menu **Advanced**→**Load Balance**→**Policy Routing** to load the following page.

Figure 3-44 Policy Routing

The following items are displayed on this screen:

➤ General

Protocol: Select the protocol for the entry in the drop-down list. If the protocol you want to set is not in the list, you can add it to the list on **3.4.4.4 Protocol** page.

Source IP: Enter the source IP range for the entry. 0.0.0.0 - 0.0.0.0 means any IP is acceptable.

Destination IP: Enter the destination IP range for the entry. 0.0.0.0 - 0.0.0.0 means any IP is acceptable.

Source Port: Enter the source Port range for the entry, which is effective only when the protocol is TCP, UDP or TCP/UDP. The default value is 1 – 65535, which means any port is acceptable.

Destination Port: Enter the destination port range for the entry, which is effective only when the protocol is TCP, UDP or TCP/UDP. The default value is 1 – 65535, which means any port is acceptable.

WAN: Select the WAN port for transmitting packets.

Effective Time: Specify the time for the entry to take effect.

Status: Activate or inactivate the entry.

➤ List of Rules

You can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-44 indicates: All the packets with Source IP between 192.168.0.100 and 192.168.0.199 and Destination IP between 116.10.20.28 and 116.10.20.29 will be forwarded from WAN1 port, regardless of the port and protocol. This entry is activated and will take effect at 8 am to 10 pm from Monday to Friday.

3.4.4.3 Link Backup

With Link Backup function, the Router will switch all the new sessions from dropped line automatically to another to keep an always on-line network.

On this page, you can configure the Link Backup function based on actual need to reduce the traffic burden of WAN port and improve the network efficiency.

Choose the menu **Advanced**→**Load Balance**→**Link Backup** to load the following page.

General

WAN Ports: WAN1 WAN2

WAN Config: Primary WAN Backup WAN

Mode: ☒ Timing ☐ Failover

Backup Effective Time: 00:00 - 24:00

☒ Sun ☒ Mon ☒ Tue ☒ Wed ☒ Thu ☒ Fri ☒ Sat

Status: ☒ Activate ☐ Inactivate

List of Rules

No.	Primary WAN	Backup WAN	Mode	Effective Time	Status	Action
<input type="checkbox"/> 1	WAN1	WAN2	Backup when any primary WAN failed	---	Active	

Select All Activate Inactivate Delete

Figure 3-45 Link Backup

The following items are displayed on this screen:

➤ General

WAN Ports:

Displays all the WAN ports in use. You can drag the light-blue WAN button to primary and backup WAN list. The color of WAN button changing to gray indicates that the WAN port is already in the primary and backup WAN list.

WAN Config:	The WAN port in the secondary WAN list will share the traffic for the WAN in the primary WAN list under the specified condition.
Mode:	You can select Timing or Failover Mode.
Timing:	Link Backup will be enabled if the specified effective time is reached. All the traffic on the primary WAN will switch to the backup WAN at the beginning of the effective time; the traffic on the backup WAN will switch to the primary WAN at the ending of the effective time.
Failover:	Specify the premise for Failover Mode. The backup WAN port will be enabled only when the premise is met.
Backup Effective Time:	Specify the backup effective time if Timing Mode has been selected. Then the backup WAN port will be enabled, while the primary WAN port is disabled in the specified time period. When the start time you enter is not earlier than the end time, the default effective time is from the start time of the day to the end time of the next day.
Status :	Activate or inactivate the entry.

➤ List of Rules

You can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-45 indicates: WAN1 is the primary port and WAN2 is the backup port. WAN2 will be enabled while WAN1 is failed. This entry is enabled.



Note:

The same WAN port cannot be added to the primary and secondary WAN lists at the same time, and one WAN port should be added to only one list.

3.4.4.4 Protocol

On this page, you can specify the protocol for routing rules conveniently. A protocol constitutes of the name and number. The Router predefines three commonly used protocols such as TCP, UDP and TCP/UDP. Moreover, you can also add new protocols as your wish.

Choose the menu **Advanced**→**Load Balance**→**Protocol** to load the following page.

Protocol

Name:

Number:

Add Clear Help

List of Protocol

No.	Name	Number	Action
<input type="checkbox"/> 1	TCP	6	---
<input type="checkbox"/> 2	UDP	17	---
<input type="checkbox"/> 3	TCP/UDP	---	---
<input checked="" type="checkbox"/> 4	TELNET	23	
<input checked="" type="checkbox"/> 5	RAV	56	

Select All Delete Search

Figure 3-46 Protocol

The following items are displayed on this screen:

➤ **Protocol**

Name: Enter a name to indicate a protocol. The name will display in the drop-down list of Protocol on Access Rule page.

Number: Enter the Number of the protocol in the range of 0-255.

➤ **List of Protocol**

You can view the information of the entries and edit them by the Action buttons.



Note:

The system predefined protocols cannot be configured.

3.4.5 Routing

3.4.5.1 Static Route

Routing is the process of selecting optimized paths in a network along which to send network traffic. Static Route is a kind of special routing configured by the administrator, which is simple, efficient, and reliable.

Commonly used in small-sized network with fixed topology, Static Route does not change along with the network topology automatically. The administrator should modify the static route information manually as long as the network topology or link status is changed.

Choose the menu **Advanced**→**Routing**→**Static Route** to load the following page.

Static Route

Destination:

Subnet Mask:

Next Hop:

Interface:

Metric: (0-15)

Description: (Optional)

Status: ☒ Activate ☐ Inactivate

List of Rules

No.	Destination	Subnet Mask	Next Hop	Interface	Metric	Status	Description	Action
<input type="checkbox"/> 1	211.162.1.0	255.255.255.0	211.200.1.1	WAN1	0	Active	tpink1	

Figure 3-47 Static Route

The following items are displayed on this screen:

➤ **Static Route**

Destination: Enter the destination host the route leads to.

Subnet Mask: Enter the Subnet Mask of the destination network.

Next Hop: Enter the gateway IP address to which the packet should be sent next.

Interface: Select the physical network interface, through which this route is accessible.

Metric: Defines the priority of the route. The smaller the value is, the higher the priority is. The default value is 0. It is recommended to keep the default value.

Description: Give a description for the entry.

Status: Activate or inactivate the entry.


➤ **List of Rules**

You can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-47 indicates: If there are packets being sent to a device with IP address of 211.162.1.0 and subnet mask of 255.255.255.0, the Router will forward the packets from WAN1 port to the next hop of 211.200.1.1.

Application Example

There is a network topology as the following figure shown:

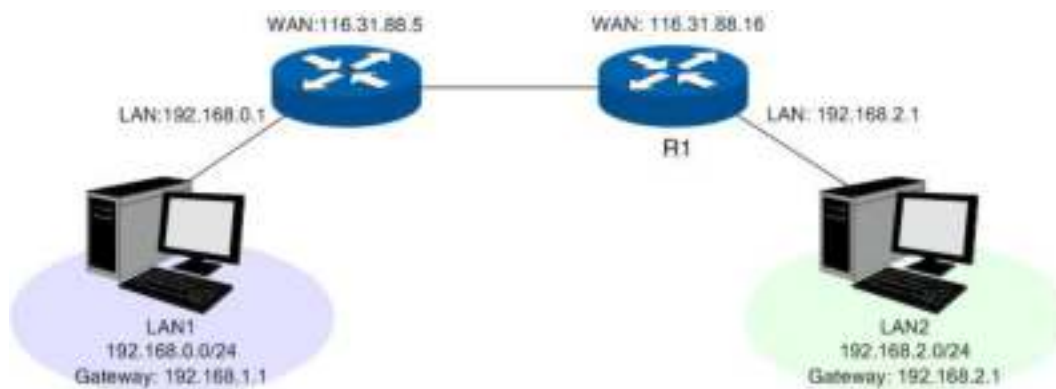

If the LAN port of TL-ER604W (with Non-NAT or Classic system mode) is connected to LAN1 with subnet of 192.168.0.0/24, while the LAN port of another Router R1 is connected to LAN2 with network of 192.168.2.0/24. Meanwhile, the WAN ports of the two routers are interconnected and within the same network. Now a host under TL-ER604W and within network of LAN1 desires to communicate with the host within network of LAN2.

You can set a Static Route entry: Enter the WAN IP address of R1 (116.31.88.16) in the Next Hop field on the Static Route page of TL-ER604W as the following figure shown, then click the <Add> button to save the entry.

Static Route	
Destination:	192.168.2.0
Subnet Mask:	255.255.255.0
Next Hop:	116.31.88.16
Interface:	LAN1
Metric:	0
Description:	Static Route
State:	<input checked="" type="checkbox"/> Add <input type="checkbox"/> Delete

3.4.5.2 RIP

RIP (Routing Information Protocol) is a dynamic route protocol using distance vector algorithm to select the optimal path. With features of easy configuration, management and implementation, it is widely used in small and medium-sized networks such as the campus network.

The distance of RIP refers to the hop counts that a data packet passes through before reaching its destination, the value range of which is 1–15. It means the destination cannot be reached if the value is more than 15. Optimal path indicates the path with the fewest hop counts. RIP exchanges the route information every 30 seconds by broadcasting UDP packets. If one Router has not sent route information in 180 seconds, the RIP of the other routers would set the distance to this Router into infinity and delete the corresponding information from route table.

RIP develops from initial RIPv1 to RIPv2 gradually. Compared with RIPv1, RIPv2 supports VLSM (Variable Length Subnet Mask), simple plain text authentication, MD5 cryptograph authentication, CIDR (Classless Inter-Domain Routing) and multicast.

TL-ER604W supports both RIPv1 version and RIPv2 version, thus you can configure the RIP version based on the actual need to improve the network performance.

Choose the menu **Advanced**→**Routing**→**RIP** to load the following page.

The screenshot shows the RIP configuration interface. The top section is titled "General" and contains a table with columns: Interface, Status, RIP Version, and Password Authentication. Below this table are dropdown menus for "All Interfaces" and buttons for "Save" and "Help".

Interface	Status	RIP Version	Password Authentication
WAN1	<input checked="" type="checkbox"/> Enable	V1 Broadcast	Disable
WAN2	<input checked="" type="checkbox"/> Enable	V2 Broadcast	Simple Auth
LAN	<input type="checkbox"/> Enable	V1 Broadcast	Disable

Below the table, there are dropdown menus for "All Interfaces" and buttons for "Save" and "Help".

The bottom section is titled "List of RIP" and contains a table with the following data:

No.	Destination	Subnet Mask	Next Hop	Interface	Hop Count	Effective Time (sec)
1	116.10.20.28	255.255.255.0	116.10.1.254	WAN1	1	1
2	192.168.10.1	255.255.255.0	192.168.20.1	LAN	1	1
3	211.162.1.1	255.255.0.0	211.200.1.1	DMZ	2	23

Figure 3-48 RIP

The following items are displayed on this screen:

➤ **General**

Interface: Displays the interfaces which has been physically connected or assigned static IP.

Status: Enable or disable RIP protocol.

RIP Version: Select RIPv1 or RIPv2. RIPv2 supports multicast and broadcast.

Password Authentication: If RIPv2 is enabled, set the Password Authentication according to the actual network situation, and the password should not be more than 15 characters.

All Interfaces: Here you can operate all the interfaces in bulk. All the interfaces will not apply RIP if "Enable" option for All Interfaces is selected.

➤ **List of RIP**

After RIP is enabled, the information of RIP forwarding the packets received by the Router will be displayed in the list.

The first entry in Figure 3-48 indicates: when receiving packets with destination IP is 116.10.20.28, the Router will select WAN1 which is in the same network with the destination IP as next hop and forward

data via this port. The IP address of next hop is 116.10.1.254 and the hop count is 1. The effective time of this entry is 1 second.



Note:

- RIP function cannot be set if the Router is in NAT Mode. To set RIP function, please change the System Mode to Routing or Full Mode.
- The RIP function of WAN port takes effects only when the Connection Type of this WAN port is Static IP.

3.4.5.3 Route Table

This page displays the information of the system route table.

Choose the menu **Advanced**→**Routing**→**Route Table** to load the following page.

Route Table						
No.	Destination	Gateway	Flags	Logical Interface	Physical Interface	Metric
1	0.0.0.0	0.0.0.0	00	wan1	eth1	1
2	192.168.0.0/24	192.168.0.1	0	v. 1	eth1	1
3	192.168.1.0/24	192.168.1.1	0	wan0	eth1	1
4	192.168.2.0/24	192.168.2.1	00H	v. 0	eth1	1
5	192.168.3.0/24	192.168.3.1	00H	wan0	eth1	1
6	192.168.4.0/24	192.168.4.1	0	v. 5	eth1	1

Figure 3-49 RIP

The following items are displayed on this screen:

➤ Route Table

Destination: The Destination of route entry.

Gateway: The Gateway of route entry.

Flags: The Flags of route entry. The Flags describe certain characteristics of the route.

Logical Interface: The logical interface of route entry.

Physical Interface: The physical interface of route entry.

Metric: The Metric of route entry.

3.5 Firewall

3.5.1 Anti ARP Spoofing

ARP (Address Resolution Protocol) is used for analyzing and mapping IP addresses to the corresponding MAC addresses so that packets can be delivered to their destinations correctly.

ARP functions to translate the IP address into the corresponding MAC address and maintain an ARP Table in which the latest used IP address-to-MAC address mapping entries are stored. ARP protocol can facilitate the Hosts in the same network segment to communicate with one another or access to external network via Gateway. However, since ARP protocol is implemented with the premise that all the Hosts and Gateways are trusted, there are high security risks during ARP Implementation Procedure in the actual complex network.

The attacker may send the ARP spoofing packets with false IP address-to-MAC address mapping entries, and then the device will automatically update the ARP table after receiving wrong ARP packets, which results in a breakdown of the normal communication. Thus, ARP defense technology is generated to prevent the network from this kind of attack.

3.5.1.1 IP-MAC Binding

IP-MAC Binding functions to bind the IP address, MAC address of the host together and only allows the Hosts matching the bound entries to access the network.

Choose the menu **Firewall**→**Anti ARP Spoofing**→**IP-MAC Binding** to load the following page.

General

☒ Enable ARP Spoofing Defense

☐ Permit the packets matching the IP-MAC Binding entries only

☐ Send GARP packets when ARP attack is detected

Interval: 100 ms

☐ Enable ARP logs

Save

IP-MAC Binding

IP Address:

MAC Address: (XX-XX-XX-XX-XX-XX)

Description: (Optional)

Status: ☒ Activate ☐ Inactivate

Add

Clear

Help

List of Rules

No.	IP Address	MAC Address	Status	Description	Action
<input type="checkbox"/> 1	192.168.0.101	00-19-66-83-53-CF	Active	host1	

Select All Activate Inactivate Delete Search

Figure 3-50 IP-MAC Binding

The following items are displayed on this screen:

➤ **General**

It is recommended to check all the options. You should import the IP and MAC address of the host to IP-MAC Binding List and enable the corresponding entry before enabling “Permit the packets matching the IP-MAC Binding entries only”.

When suffered ARP attack, the correct ARP information will be sent to the device suffering attack initiatively by GARP (Gratuitous ARP) packets, thus the error ARP information of the device will be replaced. You can set the packets sending rate in the Interval field.

With the box before **Enable ARP Logs** checked, the Router will send ARP logs to the specified server. The IP address of server is the Server IP set on **3.8.7 Logs**.

➤ IP-MAC Binding

IP Address:	Enter the IP Address to be bound.
MAC Address:	Enter the MAC Address corresponding to the IP Address.
Description:	Give a description for the entry.
Status:	Activate or inactivate the entry.

➤ List of Rules

You can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-50 indicates: The IP address of 192.168.1.101 and MAC address of 00-19-66-83-53-CF have been bound and this entry is activated.



Note:

If all the entries in the binding list are disabled and “Permit the packets of IP-MAC Binding entries only” option is selected and saved, the WEB management page of the Router cannot be login. At the moment, you should restore the Router to factory default and login again.

3.5.1.2 ARP Scanning

ARP Scanning feature enables the Router to scan the IP address and corresponding MAC address and display them on the List of Scanning Result.




Choose the menu **Firewall**→**Anti ARP Spoofing**→**ARP Scanning** to load the following page.

No.	IP Address	MAC Address	Status
1	192.168.1.101	00-19-66-83-53-CF	---
2	192.168.1.102	00-19-66-83-53-D4	---
3	192.168.1.103	00-19-66-83-53-F2	---
4	192.168.1.104	00-19-66-82-9A-4D	---
5	192.168.1.105	00-19-66-83-9A-6A	---

Figure 3-51 ARP Scanning

Enter the start and the end IP addresses into the Scanning IP Range field. Then click the <Scan> button, the Router will scan all the active hosts within the scanning range and display the result in the list.

The entries displayed on the List of Scanning Result do not mean the IP and MAC addresses are already bound. The current status for the entry will display in the “Status” field.

-  Indicates that the IP and MAC address of this entry are not bound and may be replaced by error ARP information.
-  Indicates that this entry is imported to the list on IP-MAC Binding page, but not effective yet.
-  Indicates that the IP and MAC address of this entry are already bound.

To bind the entries in the list, check these entries and click the <Import> button, then the settings will take effect if the entries do not conflict with the existed entries.



Note:

If the local hosts suffered from ARP attack, you cannot add IP-MAC Binding entries on this page. Please add entries manually on **3.5.1.1 IP-MAC Binding**.

3.5.1.3 ARP List

On this page, the IP-MAC information of the hosts which communicated with the Router recently will be saved in the ARP list.

Choose the menu **Firewall**→**Anti ARP Spoofing**→**ARP List** to load the following page.


ARP List				
No.	IP Address	MAC Address	Status	
<input type="checkbox"/> 1	192.168.1.101	00-19-66-83-53-CF		
<input type="checkbox"/> 2	192.168.1.102	00-19-66-83-53-CE		
<input type="checkbox"/> 3	192.168.1.101	00-19-66-83-53-F2		

Figure 3-52 ARP List

The configurations for the entries is the same as the configuration of List of Scanning Result on **3.5.1.2 ARP Scanning** page.

The unbound IP-MAC information will be replaced by new IP-MAC information or be automatically removed from the list if it has not been communicated with others for a long time. This period is regarded as the aging time of the ARP information.

3.5.2 Attack Defense

With Attack Defense function enabled, the Router can distinguish the malicious packets and prevent the port scanning from external network, so as to guarantee the network security.

Choose the menu **Firewall**→**Attack Defense**→**Attack Defense** to load the following page.

General

Flood Defense

☒ Enable defense of SYN flood

 Pkts

☒ Enable defense of UDP flood

 Pkts

☒ Enable defense of ICMP flood

 Pkts

☒ Enable defense of TCP RST flood

 Pkts

☒ Enable defense of CDB flood

 Pkts

☒ Enable defense of CH flood

 Pkts

Packet Anomaly Defense

☒ Enable defense of traffic

☒ Enable TCP Scan (SYN, FIN, RST, etc.)

☒ Enable Ping of Death

☒ Enable Large Ping

☒ Enable Windows Check

☒ Enable Ping from ME

☒ Enable TCP sequence (SYN and RST) check

☒ Enable TCP sequence (RST) check only on RST blocked

☒ Enable ...

☒ Security Option
 ☒ Large Window Filter Option

☒ Strict Source Route Option
 ☒ Reverse Route Option

☒ Stream Option
 ☒ Timestamp Option

☒ No Operation Option

Log

☐ Enable Attack Defense Logs

Figure 3-53 Attack Defense

The following items are displayed on this screen:

➤ General

Flood Defense: Flood attack is a commonly used DoS (Denial of Service) attack, including TCP SYN, UDP, ICMP and so on. It is recommended to select all the Flood Defense options and specify the corresponding thresholds. Keep the default settings if you are not sure.

Packet Anomaly Defense: Packet Anomaly refers to the abnormal packets. It is recommended to select all the Packet Anomaly Defense options.

Enable Attack Defense Logs: With this box checked, the Router will record the defense logs.

3.5.3 MAC Filtering

On this page, you can control the Internet access of local hosts by specifying their MAC addresses.

Choose the menu **Firewall**→**MAC Filtering**→**MAC Filtering** to load the following page.

General

☒ Enable MAC Filtering

☐ Deny all MAC addresses listed below and deny the rest

☐ Deny MAC addresses listed below and permit the rest

MAC Address

MAC Address	Description
00-11-22-33-44-55	
00-11-22-33-44-56	

List of Rules

No.	MAC Address	Description	Action
1	00-11-22-33-44-55	Deny	
2	00-11-22-33-44-56	Deny	

Figure 3-54 MAC Filtering

The following items are displayed on this screen:

➤ General

To control the access to Internet for hosts in your private network, it is recommended to check the box before **Enable MAC Filtering** and select a filtering mode according to actual situation.

➤ MAC Filtering

MAC Address: Enter the MAC Address to be filtered.

Description: Give a description for the entry.

➤ List of Rules

You can view the information of the entries and edit them by the Action buttons.

3.5.4 Access Control

3.5.4.1 URL Filtering

URL (Uniform Resource Locator) specifies where an identified resource is available and the mechanism for retrieving it. URL Filter functions to filter the Internet URL address, so as to provide a convenient way for controlling the access to Internet from LAN hosts.

Choose the menu **Firewall**→**Access Control**→**URL Filtering** to load the following page.

General

☒ Enable URL Filtering
 ☐ Enable URL Filtering when using the proxy
 ☒ Enable IP-based access and control the proxy

URL Filtering Rule

Object: ☒ Any ☐ Group
 Group:
 Mode: ☒ Keywords ☐ IP Path
 Keywords:
 Description: (Optional)

List of Rules

No.	Object	Rule	Keyword/URL	Description	Action
No entries					

Figure 3-55 URL Filtering

The following items are displayed on this screen:

➤ **General**

To control the access to Internet for hosts in your private network, you are recommended to check the box before **Enable URL Filtering** and select a filtering rule based on the actual situation.

➤ **URL Filtering Rule**

Object:

Select the range in which the URL Filtering takes effect:

- ANY: URL Filtering will take effect to all the users.
- Group: URL Filtering will take effect to all the users in group.

Mode:

Select the mode for URL Filtering. “Keyword” indicates that all the URL addresses including the specified keywords will be filtered. “URL Path” indicates that the URL address will be filtered only when it exactly matches the specified URL.

Description:

Give a description for the entry.

➤ **List of Rules**

You can view the information of the entries and edit them by the Action buttons.

Application Example:

Network Requirements:

Prevent the local hosts from accessing Internet website www.aabbcc.com and downloading the files with suffix of “exe”.

Configuration Procedure:

Select Keywords mode and type “exe” in the field, select URL mode and type “www.aabbcc.com” as the following figure shows, and then click the <Add> button to make the setting take effect.

General

☒ Enable URL Filtering

☐ Permit URL listed below and deny the rest

☒ Deny URL listed below and permit the rest

URL Filtering Rule

Object: ☒ Group ☐ ANY

Group:

Mode: ☒ Keywords ☐ URL Path

Keywords:

Description: (Optional)

List of Rules

No.	Object	Mode	Keywords/URL Path	Description	Action
<input type="checkbox"/> 1	sales	Keywords	exe	---	
<input type="checkbox"/> 2	sales	URL Path	www.aabbcc.com	---	

3.5.4.2 Web Filtering

On this page, you can filter the desired web components.

Choose the menu **Firewall→Access Control→Web Filtering** to load the following page.

Web Filtering

☒ Enable Web Filtering

☒ Web ☐ ActiveX ☒ Content

Figure 3-56 Web Filtering

Check the box before **Enable Web Filtering** and select the web components to be filtered.

3.5.4.3 Access Rules

Choose the menu **Firewall→Access Control→Access Rules** to load the following page.

Access Rules

Policy:

Service:

Interface:

Source: /

Destination: /

Effective Time: -
☒ Sun ☒ Mon ☒ Tue ☒ Wed ☒ Thu ☒ Fri ☒ Sat

Description: (Optional)

☐ Priority:

No.	Source	Destination	Policy	Service	Interface	Effective Time	Description	Action
<input type="checkbox"/> 1	192.168.0.0/24	116.10.20.0/24	Block	TELNET	LAN	08:00-20:00 Mon Tue Wed Thu Fri	---	

Figure 3-57 Access Rule

The following items are displayed on this screen:

➤ Access Rules

Policy:

Select a policy for the entry:

- Block: When this option is selected, the packets obeyed the rule will not be permitted to pass through the Router.
- Allow: When this option is selected, the packets obeyed the rule will be allowed to pass through the Router.

Service:

Select the service for the entry. Only the service belonging to the specified service type is limited by the entry. For example, if you select "Block" for Policy and only FTP for Service, the packets of other service types can still pass through the Router. You can add new service types on **3.5.4.4 Service**.

Interface:

Select interface for the entry. The entry will take effect when the interface to which the data is flowing is selected. WAN and LAN refers to all the WAN and LAN interfaces.

Source:

Select the Source IP Range for the entries, including the following three ways:

- IP/MASK: Enter an IP address or subnet mask. ("0.0.0.0/32"

means any IP).

- Group: Select a predefined group of users. You can set the group on **3.3.1 Group**.
- ANY: means for any users.

Destination: Select the Destination IP Range for the entries, including the following two ways:

- IP/MASK: Enter an IP address or subnet mask. ("0.0.0.0/32" means any IP is acceptable).
- ANY: means for any users.

Effective Time: Specify the time for the entry to take effect.

Description: Give a description for the entry.

Priority: Select this option to specify the priority for the added entries. The latest enabled entry will be displayed at the end of the list by default.

➤ List of Rules

You can view the information of the entries and edit them by the Action buttons. The smaller the value is, the higher the priority is.

The first entry in Figure 3-57 indicates: The TELNET packets transmitted from the hosts within the network of 192.168.0.0/24 will be not allowed to pass through the Router at 8:00-20:00 from Tuesday to Saturday.



Note:

- For the users in the private network and not being set access rule, the default Policy is Allow.
- To specify all IP addresses, type "0.0.0.0 / 32" in the Policy field.
- For detailed setting of subnet mask, please refer to **Appendix B FAQ**.

3.5.4.4 Service

The Service function allows you to specify the protocol and port number to be filtered for Firewall function conveniently. Protocol name and port range constitute a service type. The Router predefines three commonly used services such as HTTP, FTP and TELNET and you can also add customized

services if needed.

Choose the menu **Firewall**→**Access Control**→**Service** to load the following page.

Service

Name:

Add

Protocol:

TCP/UDP

Change

Dest. Port:

Delete

List of Service

No.	Name	Protocol	Dest. Port	Action
<input type="checkbox"/> 1	ICMP	TCP/UDP	any	...
<input type="checkbox"/> 2	IP
<input type="checkbox"/> 3	SSH	TCP	22	...
<input type="checkbox"/> 4	TELNET
<input type="checkbox"/> 5	SMTP	TCP	25	...
<input type="checkbox"/> 6	POP3	UDP	110	...
<input type="checkbox"/> 7	FTP	TCP	21	...
<input type="checkbox"/> 8	HTTP
<input type="checkbox"/> 9	HTTPS	TCP	443	...
<input type="checkbox"/> 10

Refresh

Change

Save

Figure 3-58 Service

The following items are displayed on this screen:

➤ **Service**


Name: Enter a name for the service. The name should not be more than 28 characters. The name will display in the drop-down list of Protocol on Access Rule page.

Protocol: Select the protocol for the service. The system predefined protocols include TCP, UDP and TCP/UDP.

Dest. Port: Enter the start and end ports to make a destination port range for the service. The start port number cannot be greater than the end port number.

➤ **List of Service**

You can view the information of the entries and edit them by the Action buttons.



Note:
The service types predefined by the system cannot be modified.

3.5.5 App Control

3.5.5.1 Control Rules

On this page, you can enable the Application Rules function.

Choose the menu **Firewall**→**App Control**→**Control Rules** to load the following page.

General

☐ Enable Application Control Save

Control Rules

Object: ☒ Group ☐ ANY

Group: sales

Application: Application List

Effective Time: 00:00 - 24:00

☒ Sun ☒ Mon ☒ Tue ☒ Wed ☒ Thu ☒ Fri ☒ Sat

Description: (Optional)

Status: ☒ Activate ☐ Inactivate

Add
Clear
Help

List of Rules

No.	Object	Application List	Effective Time	Status	Description	Action
<input type="checkbox"/> 1	group1	View	07:00-09:00 Sun Mon Tue Fri	Active	---	

Select All Activate Inactivate Delete Search

Figure 3-59 Application Rules

The following items are displayed on this screen:

➤ General

Check the box before **Enable Application Control** to make the Application Control function take effect. The specified application used by the specified local users will be not allowed to access the Internet if the Application Control entry is enabled.

➤ Control Rules

Object: Specify the object for the entry. You can select “Group” to limit the predefined group, or select “ANY” to limit all the users.

Group: If select “Group” as object, you can select the group in the drop-down list. To establish new group, please refer to **3.3.1 Group**.

Application: Click the <Application List> button to select applications from the popup checkbox. The applications include IM, Web IM, SNS, P2P, Media, Basic

and Proxy. The default setting is to limit all the applications in the application list except for Basic and Proxy.

Effective Time: Specify the time for the entry to take effect.

Description: Give a description for the entry.

Status: Activate or inactivate the entry.

➤ List of Rules

You can view the information of the entries and edit them by the Action buttons.

The first entry in Figure 3-59 indicates: The group1 is applied with Application Rules. You can click <View> to view the limited applications in the popup checkbox. The effective time of this entry is 7:00-9:00 on Monday, Tuesday, Friday, Saturday and Sunday. This entry is enabled.



Note:

To set the group and group members, please refer to **3.3.1 Group**.

3.5.5.2 Database

On this page, you can upgrade the application database.

Choose the menu **Firewall→App Control→Database** to load the following page.

Application Database Upgrade	
Current Version	1.1.1
Download Path	http://www.tp-link.com
Database File	http://www

Figure 3-60 Database

The database refers to all the applications in the application list on the Application Rules page, you can download the latest database from <http://www.tp-link.com>, Click the <Browse> button and select the file, and then click the <Upgrade> button to upgrade the database.

3.6 VPN

VPN (Virtual Private Network) is a private network established via the public network, generally via the Internet. However, the private network is a logical network without any physical network lines, so it is called Virtual Private Network.

With the wide application of the Internet, more and more data are needed to be shared through the Internet. Connecting the local network to the Internet directly, though can allow the data exchange, will

cause the private data to be exposed to all the users on the Internet. The VPN (Virtual Private Network) technology is developed and used to establish the private network through the public network, which can guarantee a secured data exchange.

VPN adopts the tunneling technology to establish a private connection between two endpoints. It is a connection secured by encrypting the data and using point-to-point authentication. The following diagram is a typical VPN topology.



Figure 3-61 VPN – Network Topology

As the packets are encapsulated and de-encapsulated in the Router, the tunneling topology implemented by encapsulating packets is transparent to users. The tunneling protocols supported by TL-ER604W contain Layer 3 IPsec and Layer 2 L2TP/PPTP.

3.6.1 IKE

In the IPsec VPN, to ensure a secure communication, the two peers should encapsulate and de-encapsulate the packets using the information both known. Therefore the two peers need to negotiate a security key for communication with IKE (Internet Key Exchange) protocols.

Actually IKE is a hybrid protocol based on three underlying security protocols, ISAKMP (Internet Security Association and Key Management Protocol), Oakley Key Determination Protocol, and SKEME Security Key Exchange Protocol. ISAKMP provides a framework for Key Exchange and SA (Security Association) negotiation. Oakley describes a series of key exchange modes. SKEME describes another key exchange mode different from those described by Oakley.

IKE consists of two phases. Phase 1 is used to negotiate the parameters, key exchange algorithm and encryption to establish an ISAKMP SA for securely exchanging more information in Phase 2. During phase 2, the IKE peers use the ISAKMP SA established in Phase 1 to negotiate the parameters for security protocols in IPsec and create IPsec SA to secure the transmission data.

3.6.1.1 IKE Policy

On this page you can configure the related parameters for IKE negotiation.

Choose the menu **VPN→IKE→IKE Policy** to load the following page.

IKE Policy

Policy Name

Exchange Mode:

☒ Main
 ☐ Aggressive

Local ID Type:

☒ IP Address
 ☐ FQDN

Local ID:

Local=200.0.0.1

Remote ID Type:

☒ IP Address
 ☐ FQDN

Remote ID:

Remote=200.0.0.1

Use Protocol 1:

☒

Use Protocol 2:

☒

Use Protocol 3:

☒

Use Protocol 4:

☒

Exchange Mode:

Local ID:

☐ Local
 ☒ Remote

Local ID:

List of IKE Policy

No.	Name	Mode	Protocol 1	Protocol 2	Protocol 3	Protocol 4	Action
No entries.							

Figure 3-62 IKE Policy

The following items are displayed on this screen:

➤ IKE Policy

Policy Name: Specify a unique name to the IKE policy for identification and management purposes. The IKE policy can be applied to IPsec policy.

Exchange Mode: Select the IKE Exchange Mode in phase 1, and ensure the remote VPN peer uses the same mode.

- Main: Main mode provides identity protection and exchanges more information, which applies to the scenarios with higher requirement for identity protection.
- Aggressive: Aggressive Mode establishes a faster connection but with lower security, which applies to scenarios with lower requirement for identity protection.

Local ID Type: Select the local ID type for IKE negotiation. IP Address: uses an IP address as the ID in IKE negotiation. FQDN: uses a name as the ID.

Local ID:	The local WAN IP will be inputted automatically if IP Address type is selected. If Name type is selected, enter a name for the local device as the ID in IKE negotiation
Remote ID Type:	Select the remote ID type for IKE negotiation. IP Address: uses an IP address as the ID in IKE negotiation. FQDN: uses a name as the ID.
Remote ID:	The remote gateway IP will be inputted automatically if IP Address type is selected. If Name type is selected, enter the name of the remote peer as the ID in IKE negotiation.
IKE Proposal:	Select the Proposal for IKE negotiation phase 1. Up to four proposals can be selected.
Pre-shared Key:	Enter the Pre-shared Key for IKE authentication, and ensure both the two peers use the same key. The key should consist of visible characters without blank space.
SA Lifetime:	Specify ISAKMP SA Lifetime in IKE negotiation.
DPD:	Enable or disable DPD (Dead Peer Detect) function. If enabled, the IKE endpoint can send a DPD request to the peer to inspect whether the IKE peer is alive.
DPD Interval:	Enter the interval after which the DPD is triggered.

➤ **List of IKE Policy**

In this table, you can view the information of IKE Policies and edit them by the action buttons.

3.6.1.2 IKE Proposal

On this page, you can define and edit the IKE Proposal.

Choose the menu **VPN→IKE→IKE Proposal** to load the following page.

IKE Proposal

Proposal Name:

Authentication:

Encryption:

DH Group:

Add Clear Apply

List of IKE Proposal

ID	Name	Auth	Encr	DH	Action
No records found.					

Cancel Finish Back

Figure 3-63 IKE Proposal

The following items are displayed on this screen:

➤ IKE Proposal

Proposal Name: Specify a unique name to the IKE proposal for identification and management purposes. The IKE proposal can be applied to IPsec proposal.

Authentication: Select the authentication algorithm for IKE negotiation. Options include:

- MD5: MD5 (Message Digest Algorithm) takes a message of arbitrary length and generates a 128-bit message digest.
- SHA1: SHA1 (Secure Hash Algorithm) takes a message less than 2^{64} (the 64th power of 2) in bits and generates a 160-bit message digest.

Encryption: Specify the encryption algorithm for IKE negotiation. Options include:

- DES: DES (Data Encryption Standard) encrypts a 64-bit block of plain text with a 56-bit key.
- 3DES: Triple DES, encrypts a plain text with 168-bit key.
- AES128: Uses the AES algorithm and 128-bit key for encryption.
- AES192: Uses the AES algorithm and 192-bit key for encryption.
- AES256: Uses the AES algorithm and 256-bit key for encryption.

DH Group: Select the DH (Diffie-Hellman) group to be used in key negotiation phase 1. The DH Group sets the strength of the algorithm in bits. Options include DH1, DH2 and DH5.

- DH1: 768 bits
- DH2: 1024 bits
- DH3: 1536 bits

➤ **List of IKE Proposal**

In this table, you can view the information of IKE Proposals and edit them by the action buttons.

3.6.2 IPsec

IPsec (IP Security) is a set of services and protocols defined by IETF (Internet Engineering Task Force) to provide high security for IP packets and prevent attacks.

To ensure a secured communication, the two IPsec peers use IPsec protocol to negotiate the data encryption algorithm and the security protocols for checking the integrity of the transmission data, and exchange the key to data de-encryption.

IPsec has two important security protocols, AH (Authentication Header) and ESP (Encapsulating Security Payload). AH is used to guarantee the data integrity. If the packet has been tampered during transmission, the receiver will drop this packet when validating the data integrity. ESP is used to check the data integrity and encrypt the packets. Even if the encrypted packet is intercepted, the third party still cannot get the actual information.

3.6.2.1 IPsec Policy

On this page, you can define and edit the IPsec policy.

Choose the menu **VPN→IPsec→IPsec Policy** to load the following page.

General

IPsec: ☒ Enable ☐ Disable Save

IPsec Policy

Policy Name:

Mode: LAN-to-LAN

Local Subnet: /

Remote Subnet: /

WAN: WAN1

Remote Gateway: (IP Address/Domain Name)

Policy Mode: ☒ IKE ☐ Manual

IKE Policy: ----

IPsec Proposal 1: ----

IPsec Proposal 2: ----

IPsec Proposal 3: ----

IPsec Proposal 4: ----

PFS: NONE

SA Lifetime: 28800 Sec (120-604800)

Status: ☒ Activate ☐ Inactivate

List of IPsec Policy

No.	Name	Mode	Local Subnet	Remote Subnet	Policy Mode	Status	Action
<input type="checkbox"/> 1	IPsec_1	LAN-to-LAN	192.168.0.0/24	192.168.3.0/24	IKE	Active	

Select All Activate Inactivate Delete Search

Figure 3-64 IPsec Policy

The following items are displayed on this screen:

➤ **General**

You can enable/disable IPsec function for the Router here.

➤ **IPsec Policy**

Policy Name: Specify a unique name to the IPsec policy. Up to 28 characters can be entered.

Mode: Select the network mode for IPsec policy. Options include:

- LAN-to-LAN: Select this option when the client is a network.
- Client-to-LAN: Select this option when the client is a host.

Local Subnet: Specify IP address range on your local LAN to identify which PCs on your LAN are covered by this policy. It's formed by IP address and subnet mask.

Remote Subnet:	Specify IP address range on your remote network to identify which PCs on the remote network are covered by this policy. It's formed by IP address and subnet mask.
WAN:	Specify the local WAN port for this Policy. The "Remote Gateway" of the remote peer should be set to the IP address of this WAN port.
Remote Gateway:	Enter the Remote Gateway. It can be IP address or Domain name.
Policy Mode:	<p>Select the negotiation mode for the policy.</p> <ul style="list-style-type: none"> • IKE: The parameters for the VPN tunnel are generated automatically via IKE negotiations. • Manual: All settings (including the keys) for the VPN tunnel are manually inputted and no key negotiation is needed.
• IKE Mode	
IKE Policy:	It is available when IKE is selected as the negotiation mode. Specify the IKE policy. If there is no policy selection, add new policy on VPN→IKE→IKE Policy page.
IPsec Proposal:	Select IPsec Proposal on IKE mode. Up to four IPsec Proposals can be selected on IKE mode.
PFS:	Select the PFS (Perfect Forward Security) for IKE mode to enhance security. This setting should match the remote peer. With PFS feature, IKE negotiates to create a new key in Phase2. As it is independent of the key created in Phase1, this key can be secure even when the key in Phase1 is de-encrypted. Without PFS, the key in Phase2 is created based on the key in Phase1 and thus once the key in Phase1 is de-encrypted, the key in Phase2 is easy to be de-encrypted, in this case, the communication secrecy is threatened.
SA Lifetime:	Specify IPsec SA Lifetime for IKE mode.

Status:	Activate or inactivate the entry.
<ul style="list-style-type: none"> • Manual Mode 	
IPsec Proposal:	Select the IPsec Proposal. Only one proposal can be selected on Manual mode. You need to first create the IPsec Proposal.
Incoming SPI:	Specify the Incoming SPI (Security Parameter Index) manually. The Incoming SPI here must match the Outgoing SPI value at the other end of the tunnel, and vice versa.
AH Authentication Key-In:	Specify the inbound AH Authentication Key manually if AH protocol is used in the corresponding IPsec Proposal. The inbound key here must match the outbound AH authentication key at the other end of the tunnel, and vice versa.
ESP Authentication Key-In:	Specify the inbound ESP Authentication Key manually if ESP protocol is used in the corresponding IPsec Proposal. The inbound key here must match the outbound ESP authentication key at the other end of the tunnel, and vice versa.
ESP Encryption: Key-In:	Specify the inbound ESP Encryption Key manually if ESP protocol is used in the corresponding IPsec Proposal. The inbound key here must match the outbound ESP encryption key at the other end of the tunnel, and vice versa.
Outgoing SPI:	Specify the Outgoing SPI (Security Parameter Index) manually. The Outgoing SPI here must match the Incoming SPI value at the other end of the tunnel, and vice versa.
AH Authentication Key-Out:	Specify the outbound AH Authentication Key manually if AH protocol is used in the corresponding IPsec Proposal. The outbound key here must match the inbound AH authentication key at the other end of the tunnel, and vice versa.
ESP Authentication Key-Out:	Specify the outbound ESP Authentication Key manually if ESP protocol is used in the corresponding IPsec Proposal. The outbound key here must match the inbound ESP authentication key at the other end of the tunnel, and vice versa.

ESP Encryption Key-Out:

Specify the outbound ESP Encryption Key manually if ESP protocol is used in the corresponding IPsec Proposal. The outbound key here must match the inbound ESP encryption key at the other end of the tunnel, and vice versa.

➤ List of IPsec Policy IPsec

In this table, you can view the information of IPsec policies and edit them by the action buttons.

The first entry in Figure 3-64 indicates: this is an IPsec tunnel, the local subnet is 192.168.0.0/24, the remote subnet is 192.168.3.0/24 and this tunnel is using IKE automatic negotiation. It is enabled.



Tips:

- 0.0.0.0/32 indicates all IP addresses.
- Refer to Appendix Troubleshooting 5 for the configuration of subnet.

3.6.2.2 IPsec Proposal

On this page, you can define and edit the IPsec proposal.

Choose the menu **VPN→IPsec→IPsec Proposal** to load the following page.

IPsec Proposal

Proposal Name:

Security Protocol:

ESP

▼

ESP Authentication:

MD5

▼

ESP Encryption:

3DES



▼

Add

Clear

Help

List of IPsec Proposal

	No.	Name	Protocol	AH Auth	ESP Auth	ESP Encr	Action
<input type="checkbox"/>	1	proposal_1	ESP	---	MD5	3DES	 

Select All

Delete

Search

Figure 3-65 IPsec Proposal

The following items are displayed on this screen:

➤ IPsec Proposal

Proposal Name:

Specify a unique name to the IPsec Proposal for identification and management purposes. The IPsec proposal can be applied to IPsec policy.

- Security Protocol:** Select the security protocol to be used. Options include:
- AH: AH (Authentication Header) provides data origin authentication, data integrity and anti-replay services.
 - ESP: ESP (Encapsulating Security Payload) provides data encryption in addition to origin authentication, data integrity, and anti-replay services.

- AH Authentication:** Select the algorithm used to verify the integrity of the data for AH authentication. Options include:
- MD5: MD5 (Message Digest Algorithm) takes a message of arbitrary length and generates a 128-bit message digest.
 - SHA: SHA (Secure Hash Algorithm) takes a message less than the 64th power of 2 in bits and generates a 160-bit message digest.

- ESP Authentication:** Select the algorithm used to verify the integrity of the data for ESP authentication. Options include:
- MD5: MD5 (Message Digest Algorithm) takes a message of arbitrary length and generates a 128-bit message digest.
 - SHA: SHA (Secure Hash Algorithm) takes a message less than the 64th power of 2 in bits and generates a 160-bit message digest.

- ESP Encryption:** Select the algorithm used to encrypt the data for ESP encryption. Options include:
- NONE: Performs no encryption.
- DES: DES (Data Encryption Standard) encrypts a 64-bit block of plain text with a 56-bit key. The key should be 8 characters.
- 3DES: Triple DES, encrypts a plain text with 168-bit key. The key should be 24 characters.
- AES128: Uses the AES algorithm and 128-bit key for encryption. The key should be 16 characters.

➤ **List of IPsec Proposal**

In this table, you can view the information of IPsec Proposals and edit them by the action buttons.

3.6.2.3 IPsec SA

This page displays the information of the IPsec SA (Security Association).

Choose the menu **VPN→IPsec→IPsec SA** to load the following page.



No.	Name	SPI	Tunnel	Data Flow	Protocol	AH Auth	ESP Auth	ESP Encr	Status
1	Ipsec_1	388462817<-> 801628175	172.30.70.151<-> 172.30.70.161	192.168.0.0/24<-> 192.168.0.0/24	ESP	—	MD5	3DES	Connected

Figure 3-66 IPsec SA

Figure 3-66 displays the connection status of the NO.1 entry in the List of IPsec policy in Figure 3-64. As shown in the figure, the Router is using WAN2 for tunnel connection, and the IP address of WAN2 and the default gateway of remote peer are 172.30.70.151 and 172.30.70.161 respectively. Security protocol and other parameters for IPsec tunnel and the remote router should be configured the same.

As Security Association is unidirectional, an incoming SA and an outgoing SA are created to protect data flows for each tunnel after IPsec tunnel is successfully established. The incoming SPI value and outgoing SPI value are different. However, the Incoming SPI value must match the Outgoing SPI value at the other end of the tunnel, and vice versa. The connection status on the remote endpoint of this tunnel is as the following figure shows. The SPI value is obtained via auto-negotiation.



No.	Name	SPI	Tunnel	Data Flow	Protocol	AH Auth	ESP Auth	ESP Encr	Status
1	Ipsec_1	801628175<-> 388462817	172.30.70.161<-> 172.30.70.151	192.168.0.0/24<-> 192.168.0.0/24	ESP	—	MD5	3DES	Connected

3.6.3 L2TP/PPTP

Layer 2 VPN tunneling protocol consists of L2TP (Layer 2 Tunneling Protocol) and PPTP (Point to Point Tunneling Protocol).

Both L2TP and PPTP encapsulate packet and add extra header to the packet by using PPP (Point to Point Protocol). Table depicts the difference between L2TP and PPTP.

Protocol	Media	Tunnel	Length of Header	Authentication
PPTP	IP network	Single tunnel	6 bytes at least	Not supported
L2TP	IP network of UDP, frame relay virtual circuit, X.25 virtual circuit	Multiple tunnels	4 bytes at least	Supported

3.6.3.1 L2TP/PPTP Tunnel

On this page, you can configure the L2TP/PPTP VPN.

Choose the menu **VPN→L2TP/PPTP→L2TP/PPTP Tunnel** to load the following page.

General

☐ Enable VPN-to-Internet

Hello Interval: 60 Sec (60-1080)

L2TP/PPTP Tunnel

Protocol: ☒ L2TP ☐ PPTP

Mode: ☒ Server ☐ Client

Account Name:

Password:

Tunnel: LAN-to-LAN

Max Connections: 1 (1-10)

Encryption: ☒ Enable ☐ Disable

Pre-shared Key:

Client IP: 0.0.0.0

IP Address Pool:

Remote Subnet: /

Status: ☒ Activate ☐ Inactivate

List of Configurations

No.	Protocol	Account Name	Mode	Tunnel	Server IP	IP Address Pool	Remote Subnet	Share	Status	Action
<input type="checkbox"/> 1	L2TP	test	Client	---	172.31.70.161	---	192.168.2.0/24	Enabled	Active	

Select All Activate Inactivate Delete Search

Figure 3-67 L2TP/PPTP Tunnel

The following items are displayed on this screen:

➤ **General**

Enable VPN-to-Internet: Specify whether to enable VPN-to-Internet function. If enabled, the VPN client is permitted to access the LAN of the server and Internet.

Hello Interval: Specify the interval to send hello packets.

➤ **L2TP/PPTP Tunnel**

Protocol: Select the protocol for VPN tunnel. Options include L2TP and PPTP.

Mode: Specify the working mode for this Router. Options include:

- **Client:** In this mode, the device sends a request to the remote L2TP/PPTP server initiatively for establishing a tunnel.
- **Server:** In this mode, the Router responds the request from the remote client for establishing a tunnel.

Account Name:	Enter the account name of L2TP/PPTP tunnel. It should be configured identically on server and client.
Password:	Enter the password of L2TP/PPTP tunnel. It should be configured identically on server and client.
Tunnel:	<p>Select the network mode for the tunnel. Options include:</p> <ul style="list-style-type: none"> • LAN-to-LAN: Select this option when the L2TP/PPTP client is a LAN. The tunneling request is always initiated by a router. • Client-to-LAN: Select this option when the L2TP/PPTP client is a single PC.
Max Connections:	Specify the maximum connections that the tunnel can support. This item is available for Client-to-LAN tunnel type on Server mode.
WAN:	Specify the WAN port to transmit the packets. This item is available for Client mode.
L2TP/PPTP Server:	Enter the IP address of L2TP/PPTP server. (It's always the WAN IP address of the remote peer of L2TP/PPTP tunnel.) This item is available for Client mode.
Encryption:	Specify whether to enable the encryption for the tunnel. If enabled, the L2TP tunnel will be encrypted by IPsec, and the PPTP tunnel will be encrypted by MPPE.
Pre-shared Key:	Enter the Pre-shared Key for IKE authentication. This item is available for L2TP tunnel.
Client:	Enter the IP address of the client which is allowed to connect to this L2TP/PPTP server. The default IP "0.0.0.0" means any IP address is acceptable.
IP Pool:	Select the IP Pool Name to specify the address range for the server's IP assignment. This item is available for Server mode.
Remote Subnet:	Enter the IP address range of your remote network. (It's always the IP address range of LAN on the remote peer of VPN tunnel.) It's the combination of IP address and subnet mask.

Status

Activate or inactivate the entry.

➤ List of Configurations

In this table, you can view your configurations of the tunnels and edit them by the action buttons.

The No.1 entry in Figure 3-67 indicates: this tunnel is encapsulated by using L2TP. Its user name is test, the password can be configured, and the Router is configured in Client mode. The remote server is 172.30.70.161 and the remote subnet is 192.168.2.0/24. This entry is enabled.

3.6.3.2 IP Address Pool

On this page, you can configure the IP Address Pool.

Choose the menu **VPN→L2TP/PPTP→IP Address Pool** to load the following page.

IP Address Pool			
Pool Name			Add
IP Address Range			Edit
			Del
List of IP Address Pool			
No.	Pool Name	IP Address Range	Action
<input type="checkbox"/> 1	1	192.168.1.1/24	
<div>Add Edit Delete</div>			

Figure 3-68 IP Address Pool

The following items are displayed on this screen:

➤ IP Address Pool

Pool Name: Specify a unique name to the IP Address Pool for identification and management purposes.

IP Address Range: Specify the start and the end IP address for IP Pool. The start IP address should not exceed the end address and the IP ranges must not overlap.

➤ List of IP Pool

In this table, you can view the information of IP Pools and edit them by the action buttons.

3.6.3.3 List of L2TP/PPTP Tunnel

This page displays the information and status of the tunnels.

Choose the menu **VPN→L2TP/PPTP→List of L2TP/PPTP Tunnel** to load the following page.


List of Tunnel									
No.	Protocol	Client	Server	Tunnel ID	Session ID	Peer IP	Peer Name	Status	Action
1	L2TP	192.168.1.1	192.168.1.1	1713	1713	192.168.1.1	192.168.1.1	Connected	
<input type="button" value="Refresh"/> <input type="button" value="Search"/> <input type="button" value="Exp"/>									

Figure 3-69 List of L2TP/PPTP Tunnel

Figure 3-69 displays the connection status of the NO.1 entry in the list of tunnel in Figure 3-68. This tunnel has been successfully established. Each tunnel has a Tunnel ID and a Session ID. The ID value in client corresponds to that in server. The connection information of this tunnel in the server is shown as the figure below.

List of Tunnel									
No.	Protocol	Client	Server	Tunnel ID	Session ID	Peer IP	Peer Name	Status	Action
1	L2TP	192.168.1.1	192.168.1.1	1713	1713	192.168.1.1	192.168.1.1	Connected	
<input type="button" value="Refresh"/> <input type="button" value="Search"/> <input type="button" value="Exp"/>									

Every time a tunnel connection is established, a tunnel ID and a session ID are created. In a Router, the ID values of different tunnels are different. A tunnel can create different ID values when it is reconnected.

3.7 Services

3.7.1 PPPoE Server

The Router can be configured as a PPPoE server to specify account and IP address to users in LAN and thus you can control the dial-up of users for a high efficiency in network management.

The PPPoE configuration can be implemented on **General**, **IP Address Pool**, **Account**, **Exceptional IP** and **List of Account** pages.

3.7.1.1 General

On this page, you can configure PPPoE function globally.

Choose the menu **Services**→**PPPoE Server**→**General** to load the following page.

General			
PPPoE Server:	<input type="radio"/> Disable <input checked="" type="radio"/> Enable	<input type="button" value="Save"/> <input type="button" value="Cancel"/>	
Dial-up Access Only:	<input type="radio"/> Enable <input checked="" type="radio"/> Disable		
PPPoE User Isolation:	<input checked="" type="radio"/> Enable <input type="radio"/> Disable		
Primary DNS:	0.0.0.0		
Secondary DNS:	0.0.0.0		
Max Sessions:	256	(1-256)	
Max Echo Requests:	10	(1-65535)	
Idle Timeout:	30	Min	
Authentication:	<input checked="" type="radio"/> PAM <input type="radio"/> RADIUS		
Client Protocols:	<input checked="" type="checkbox"/> PPP <input checked="" type="checkbox"/> LCP <input checked="" type="checkbox"/> HDBP LCP <input checked="" type="checkbox"/> HDBP LCP off		

Figure 3-70 General

The following items are displayed on this screen:

➤ **General**

PPPoE Server: Specify whether to enable the PPPoE Server function.

Dial-up Access Only: Specify whether to enable the Dial-up Access Only function. If enabled, only the Dial-in Users and the user with Exceptional IP can access the Internet.

PPPoE User Isolation: Specify whether to allow the Dial-in Users to communicate with one another.

Primary/Secondary DNS: Enter the Primary/Secondary DNS server address. The default is 0.0.0.0.

Max Sessions: Specify the maximum number of the sessions for PPPoE server. The default is 256.

Max Echo-Requests: Specify the maximum number of Echo-Requests sent by the server to wait for response. The default is 10. The link will be dropped when the number of the unacknowledged LCP echo requests reaches your specified Max Echo-Requests.

Idle Timeout: Enter the maximum idle time. The session will be terminated after it has been inactive for this specified period. It can be 0-10080 minutes. If you want your Internet connection to remain on at all times, enter 0 in the Idle Timeout field. The default value is 30.

Authentication: Select the Authentication type. It can be Local authentication and Remote authentication. Select Local authentication for authentication in PPPoE server and select Remote authentication for authentication in the remote server.

Auth Protocol: Select at least one authentication protocol for Local Authentication.

- PAP, transferring username and password in plain text in the network, is used in a less secured network.
- CHAP is more secured for it adopts three handshakes and does not transfer password in plain text.
- MS-CHAP, put forward by Microsoft, adopts a different encryption algorithm of CHAP.
- MS-CHAP v2 with a higher security is an improved version of MS-CHAP.

Radius Server: It is available when Remote Authentication is selected. RADIUS (Remote Authentication Dial In User Service) provides an authentication for dial-up users. Enter the Radius Server address for Remote authentication.

Shared Key: Enter the Shared Key for Remote authentication. It should be the same to the shared key of the Radius Server.

3.7.1.2 IP Address Pool

On this page, you can define or edit the IP Address Pool.

Choose the menu **Services**→**PPPoE Server**→**IP Address Pool** to load the following page.

Figure 3-71 IP Address Pool

The following items are displayed on this screen:

➤ IP Address Pool

Pool Name: Specify a unique name to the IP Address Pool for identification and management purposes.

IP Address Range: Specify the start and the end IP address for IP Pool. The start IP address should not exceed the end address and the IP address ranges must not overlap.

> List of IP Pool

In this table, you can view the information of IP Address Pools and edit them by the Action buttons.

3.7.1.3 Account

On this page, you can configure the PPPoE account.

Choose the menu **Services**→**PPPoE Server**→**Account** to load the following page.

Figure 3-72 Account

The following items are displayed on this screen:

> Account

Account Name: Enter the account name. This name should not be the same with the one in L2TP/PPTP connection settings.

Password: Enter the password.

IP Address Assigned Mode: Select the IP Address Assigned Mode for IP assignment.

- **Static:** Select this option to assign a static IP address to the client.
- **Dynamic:** Select this option to assign available IP addresses to the client automatically.

Static IP Address: It's available on Static mode. Enter a static IP address for the client.

IP Address Pool:	It's available on Dynamic mode. Select an IP Address Pool to make a range to assign dynamic IPs.
Max Sessions:	Specify the maximum number of sessions for the client. The default value is 1.
Expiration Date:	Specify the Expiration Date of the account. The default is 2099-1-1.
Description:	Enter the description for management and search purposes. Up to 28 characters can be entered.
Status:	Activate or inactivate the entry.
MAC Binding:	<p>Select a MAC Binding type from the pull-down list. Options include:</p> <ul style="list-style-type: none"> • Disable: Select this option to disable the MAC Binding function. • Manual: Select this option to bind the account to a MAC address manually. Only from the Host with this MAC address can the account log on to the server. • Automatic: Select this option to bind the account to the MAC address of its first login automatically. Only from the Host with this MAC address can the account log on to the server.
MAC Address:	It is available when Manually is selected. Enter the MAC address of the Host to bind with the account.
Session Timeout:	Enter a time after which the connection will be dropped. To keep the connection always on, enter 0 in the Session Timeout field. The default is 48. If Enable Advanced Account Features is not selected, the Session Timeout value is 0 by default.

➤ **List of Account**

In this table, you can view the information of accounts and edit them by the Action buttons.

3.7.1.4 Exceptional IP

When the Dial-up Access Only function is enabled, only the Dial-in Users and the user with Exceptional IP can access the Internet. On this page, you can specify the Exceptional IP.

Choose the menu **Services**→**PPPoE Server**→**Exceptional IP** to load the following page.

Figure 3-73 Exceptional IP

The following items are displayed on this screen:

➤ **Exceptional IP**

IP Address Range: Specify the start and the end IP address to make an exceptional IP address range. This range should be in the same IP range with LAN port of the Router. The start IP address should not exceed the end address and the IP address ranges must not overlap.

Description: Give a description to the exceptional IP address range for identification.

Status: Activate or inactivate the entry.

➤ **List of Account**

In this table, you can view the information of Exceptional IPs and edit them by the Action buttons.

3.7.1.5 List of Account

On this page, you can view the detailed information of all accounts you have established.

Choose the menu **Services**→**PPPoE Server**→**List of Account** to load the following page.

No.	Username	Status	IP Address	Host Address	Username	Password	Description	Action
1	admin	Connected	10.20.1.100	10.20.1.1	admin	45678	L2F	

Figure 3-74 List of Account

Figure 3-74 displays the connection information of PPPoE users. Click to disconnect the account. Click the <Disconnect All> button to disconnect all accounts.

3.7.2 E-Bulletin

With E-Bulletin function, bulletin information can be released to the specified users. On this page you can edit the bulletin content and specify the receiving user group.

Choose the menu **Services**→**E-Bulletin** to load the following page.

General

☒ Enable E-Bulletin
Interval: 60 Min
☒ Enable Logs
Save

E-Bulletin

Title:

Content:

Object: ☒ Group ☐ ANY

Group: Available Group Selected Group
Group1
>> <<

Effective Time: 00:00 - 24:00
☒ Sun ☒ Mon ☒ Tue ☒ Wed ☒ Thu ☒ Fri ☒ Sat

Publisher:

Description: (Optional)

Status: ☒ Activate ☐ Inactivate

List of E-Bulletin

No.	Title	Object	Effective Time	Publisher	Description	Action
1	Notice	Group1	00:00-20:00 Thu Fri	Administ rator	---	

Select All Activate Inactivate Delete Search

Figure 3-75 E-Bulletin

The following items are displayed on this screen:

➤ **General**

Enable E-Bulletin: Specify whether to enable electronic bulletin function.

Interval: Specify the interval to release the bulletin.

Enable Logs: Specify whether to log the E-Bulletin.

➤ **E-Bulletin**



Title: Enter a title for the bulletin.

Content: Enter the content of the bulletin.

Object:

Select the object of this bulletin. Options include:

- ANY: The bulletin will be released to all the users and the PCs on the LAN.
- Group: The bulletin will be released to the users in the selected group.

You can click  button to add a group to the selected group and click  to remove a group from the selected group. Group is created on **User Group**→**Group** page.

Effective Time:

Specify the effective time for the bulletin. Only one bulletin can be set for the object at the same time.

Publisher:

Enter the name of the bulletin's publisher.

Description:

Enter the description for the bulletin.

Status:

Activate or inactivate the entry.

➤ **List of E-Bulletin**

In this table, you can view the existing bulletins and edit them by the Action button.

The No.1 entry in Figure 3-75 indicates: this bulletin is released by the administrator, and it is released to the Group1 from 8am to 20pm on Thursday and Friday every a bulletin interval. (the interval in the figure is 30 min). This entry is enabled.

**Tips:**

For the configuration for groups and users, please refer to the **User Group** section.

3.7.3 Dynamic DNS

DDNS (Dynamic DNS) service allows you to assign a fixed domain name to a dynamic WAN IP address, which enables the Internet hosts to access the Router or the hosts in LAN using the domain names.

As many ISPs use DHCP to assign public IP addresses in WAN, the public IP address assigned to the client is unfixed. In this way, it's very difficult for other clients to get the latest IP address of this client for access.

DDNS (Dynamic DNS) server provides a fixed domain name for DDNS client and maps its latest IP address to this domain name. When DDNS server works, DDNS client informs the DDNS server of the latest IP address, the server will update the mappings between the domain name and IP address in DNS database. Therefore, the users can use the same domain name to access the DDNS client even

if the IP address of the DDNS client has changed. DDNS is usually used for the Internet users to access the private website and FTP server, both of which are established based on Web server.

The Router, as a DDNS client, cannot provide DDNS service. Prior to using this function, be sure you have registered on the official websites of DDNS service providers for username, password and domain name. TL-ER604W Router offers PeanutHull DDNS client, DynDNS DDNS client, NO-IP DDNS client and Comexe DDNS client.

The **Dynamic DNS** can be implemented on **DynDNS DDNS**, **No-IP DDNS**, **Peanuthull DDNS** and **Comexe DDNS** pages.

3.7.3.1 DynDNS

On this page, you can configure DynDNS client.

Choose the menu **Services**→**Dynamic DNS**→**DynDNS** to load the following page.

DynDNS				
Account Name	user	<Go to register>		
Password	****			
Domain Name	user.dyndns.com			
DDNS Service	<input checked="" type="radio"/> Activate <input type="radio"/> Deactivate			
DDNS Port	8081			
DDNS Status	Online			
<div>Save Refresh Help</div>				
List of DynDNS Account				
id	Account Name	Domain Name	Status	Action
1	user	user.dyndns.com	Online	
2	user	user.dyndns.com	Online	

Figure 3-76 DynDNS DDNS

The following items are displayed on this screen:

➤ **Dyndns DDNS**

- Account Name:** Enter the Account Name of your DDNS account. If you have not registered, click <Go to register> to go to the website of DynDNS for register.
- Password:** Enter the password of your DDNS account.
- Domain Name:** Enter the Domain Name that you registered with your DDNS service provider.
- DDNS Service:** Activate or inactivate DDNS service here.

WAN Port: Displays the WAN port for which DynDNS DDNS is selected.

DDNS Status: Displays the current status of DDNS service

- Offline: DDNS service is disabled.
- Connecting: client is connecting to the server.
- Online: DDNS works normally.
- Authorization fails: The Account Name or Password is incorrect. Please check and enter it again.


➤ List of DynDNS Account

In this table, you can view the existing DDNS entries or edit them by the Action button.

3.7.3.2 No-IP

On this page you can configure NO-IP DDNS client.

Choose the menu **Services**→**Dynamic DNS**→**No-IP** to load the following page.

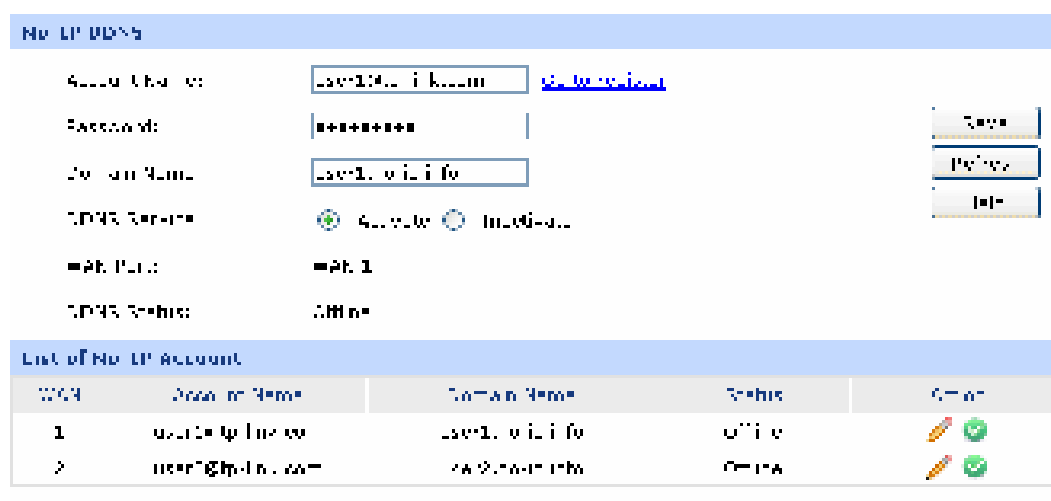

ID	Account Name	Domain Name	Status	Action
1	user@ip.lan	user@ip.lan	Offline	
2	user@ip.lan	user@ip.lan	Online	

Figure 3-77 NO-IP DDNS

The following items are displayed on this screen:

➤ No-IP DDNS

Account Name: Enter the Account Name of your DDNS account. If you have not registered, click <Go to register> to go to the website of No-IP for register.

Password: Enter the password of your DDNS account.

Domain Name: Enter the Domain Name that you registered with your DDNS service provider.

DDNS Service: Activate or inactivate DDNS service here.

WAN Port: Displays the WAN port for which No-IP DDNS is selected.

DDNS Status: Displays the current status of DDNS service

- Offline: DDNS service is disabled.
- Connecting: client is connecting to the server.
- Online: DDNS works normally.
- Authorization fails: The Account Name or Password is incorrect. Please check and enter it again.

➤ List of No-IP Account

In this table, you can view the existing DDNS entries or edit them by the Action button.

3.7.3.3 PeanutHull

On this page you can configure PeanutHull DDNS client.

Choose the menu **Services**→**Dynamic DNS**→**PeanutHull** to load the following page.

PeanutHull DDNS

Account Username: [Go to register](#)

Password: [Show](#)

DDNS Service: ☐ No-IP ☒ PeanutHull

WAN Port:

Service Type:

DDNS Status:

Account Name: [Go to register](#)

[Save](#) [Refresh](#) [Cancel](#)

ID	Account Name	Domain Name	Status	Action
1	user1		Offline	Edit Delete
2	user2		Online	Edit Delete

Figure 3-78 PeanutHull DDNS

The following items are displayed on this screen:

➤ PeanutHull DDNS

Account Name: Enter the Account Name of your DDNS account. If you have not registered, click <Go to register> to go to the website of PeanutHull for register.

- Password:** Enter the password of your DDNS account.
- DDNS Service:** Activate or inactivate DDNS service here.
- WAN Port:** Displays the WAN port for which PeanutHull DDNS is selected.
- Service Type:** Displays the DDNS service type, including Professional service and Standard service.
- DDNS Status:** Displays the current status of DDNS service
- Offline: DDNS service is disabled.
 - Connecting: client is connecting to the server.
 - Online: DDNS works normally.
 - Authorization fails: The Account Name or Password is incorrect. Please check and enter it again.
- Domain Name:** Displays the domain names obtained from the DDNS server. Up to 16 domain names can be displayed here.

➤ List of PeanutHull Account

In this table, you can view the existing DDNS entries or edit them by the Action button.

3.7.3.4 Comexe

On this page you can configure Comexe DDNS client.

Choose the menu **Services**→**Dynamic DNS**→**Comexe** to load the following page.

Comexe DDNS

Account Name: [Go to register](#)

Password:

DDNS Service: ☐ Activate ☒ Inactivate

WAN Port: WAN 1

DDNS Status: Offline

Domain Name: --- [View All](#)

Save Refresh Help

WAN	Account Name	Domain Name	Status	Action
1	smbtestuser4	---	Offline	
2	user2	---	Offline	

Figure 3-79 Comexe DDNS

The following items are displayed on this screen:

➤ Comexe DDNS

Account Name: Enter the Account Name of your DDNS account. If you have not registered, click <Go to register> to go to the website of Comexe for register.

Password: Enter the password of your DDNS account.

DDNS Service: Activate or inactivate DDNS service here.

WAN Port: Displays the WAN port for which Comexe DDNS is selected.

DDNS Status: Displays the current status of DDNS service

- Offline: DDNS service is disabled.
- Connecting: client is connecting to the server.
- Online: DDNS works normally.
- Authorization fails: The Account Name or Password is incorrect. Please check and enter it again.

Domain Name: Displays the domain names obtained from the DDNS server. Up to 5 domain names can be displayed here.

➤ List of Comexe Account

In this table, you can view the existing DDNS entries or edit them by the Action button.

3.7.4 UPnP

Devices based on UPnP (Universal Plug and Play) protocol from different manufacturer can automatically discover and communicate with one another.

If UPnP groupware are installed in the host in LAN and UPnP function is enabled for the Router, the host in LAN can automatically open the corresponding port to allow the UPnP application in WAN to access the resource of the host in LAN via this port, so that the functions limited to NAT can work normally. For example, MSN Messenger installed in Windows XP and Windows ME system is using UPnP protocol when audio and video communications are processing.

On this page you can configure UPnP service.

Choose the menu **Services**→**UPnP** to load the following page.

General

UPnP Function: ☒ Enable ☐ Disable Save Help

List of UPnP Mapping

No.	Protocol	Internal Port	IP Address	External Port	Internal Port	Status	Action
1	TCP	12856	192.168.0.101	12856	12856	Active	

Refresh Add Delete Save

Figure 3-80 UPnP

The following items are displayed on this screen:

➤ **General**

UPnP Function: Enable or disable the UPnP function globally.

➤ **List of UPnP Mapping**

After UPnP is enabled, all UPnP connection rules will be displayed in the list of UPnP Mapping. Up to 64 UPnP service connections are supported in TL-ER604W.

The NO.1 entry in Figure 3-80 indicates: TCP data received on port 12856 of the WAN port in the Router will be forwarded to port 12856 in 192.168.0.101 server in LAN.



Note:

- When using UPnP function, make sure the UPnP is enabled for the Router, and the operating system and applications in the host support UPnP service.
- As some Trojan and viruses can open the specific port using UPnP service resulting in hacker attack on the host, be careful of using UPnP service.

3.8 Maintenance

3.8.1 Admin Setup

3.8.1.1 Administrator

On this page, you can modify the factory default user name and password of the Router.

Choose the menu **Maintenance**→**Admin Setup**→**Administrator** to load the following page.

Figure 3-81 Administrator

The following items are displayed on this screen:

➤ **Administrator**

Current User Name: Enter the current user name of the Router.

Current Password: Enter the current password of the Router.

New User Name: Enter a new user name for the Router.

New Password: Enter a new password for the Router.

Confirm New Password: Re-enter the new password for confirmation.



Note:

- The factory default password and user name are both admin.
- You should enter the new user name and password when next login if the current username and password has been changed.
- The new user name and password must not exceed 31 characters in length and must consist of numbers or letters. All the fields are case-sensitive.

3.8.1.2 Login Parameter

On this page, you can configure and modify the Web and Telnet port.

Choose the menu **Maintenance**→**Admin Setup**→**Login Parameter** to load the following page.

Figure 3-82 Login Parameter

The following items are displayed on this screen:

➤ **General**

Web Management Port: Enter the Web Management Port for the Router.

Telnet Management Port: Enter the Telnet Management Port for the Router.

Web Idle Timeout: Enter a timeout period that the Router will log you out of the Web-based Utility after a specified period (Web Idle Timeout) of inactivity.

Telnet Idle Timeout: Enter a timeout period that the Router will log the remote PCs out of the Web-based Utility after a specified period (Telnet Idle Timeout) of inactivity.



Note:

- The default Web Management Port is 80. If the port is changed, you should type in the new address, such as <http://192.168.0.1:XX> ("XX" is the new management port number). E.g: If the Web Management Port is changed to 88, type http://192.168.0.1:88 in the address filed to login the Router.
- The new timeout period will take effect when next login.

3.8.1.3 Remote Management

On this page you can configure the Remote Management function. This feature allows managing your Router from a remote location via the Internet.

Choose the menu **Maintenance**→**Setup**→**Remote Management** to load the following page.

Remote Management			
Subnet/Mask:	<input type="text" value="0.0.0.0"/> / <input type="text" value="32"/>	<input type="button" value="Add"/>	
Status:	<input checked="" type="radio"/> Activate <input type="radio"/> Inactivate	<input type="button" value="Clear"/>	
		<input type="button" value="Help"/>	
List of Subnet			
No.	Subnet/Mask	Status	Action
<input type="checkbox"/> 1	192.168.2.0/24	Active	
<input type="button" value="Select All"/> <input type="button" value="Activate"/> <input type="button" value="Inactivate"/> <input type="button" value="Delete"/> <input type="button" value="Search"/>			

Figure 3-83 Remote Management

The following items are displayed on this screen:

➤ **Remote Management**

- Subnet/Mask:** Specify a single IP address or network address for the hosts desired to access the Router from external network.
- Status:** Activate or inactivate the entry.

➤ List of Subnet

In this list, you can view the Remote Management entries and edit them by the Action buttons.

The first entry in Figure 3-83 indicates that: The hosts with IP address in subnet of 192.168.2.0/24 are allowed to access the Router and this entry is activated.

Application Example

Network Requirements

Allow the IP address within 210.10.10.0/24 segment to manage the Router with IP address of 210.10.10.50 remotely.

Configuration Procedure

Type 210.10.10.0/24 in the Subnet/Mask field on Remote Management page and enable the entry as the following figure shows.

Remote Management		
Subnet/Mask	210.10.10.0 / 24	<input type="button" value="Add"/> <input type="button" value="Edit"/> <input type="button" value="Delete"/>
Status	<input checked="" type="radio"/> Active <input type="radio"/> Inactive	

Then type the corresponding port number in Web Management Port and Telnet Management Port fields as the following figure shows.

General	
Web Management Port	80
Telnet Management Port	20

Finally, start the web browser and type 210.10.10.50 in the URL field to log in the Web management page of the Router.

3.8.2 Management

3.8.2.1 Factory Defaults

Choose the menu **Maintenance**→**Management**→**Factory Defaults** to load the following page.

Factory Defaults	
Click the button below to restore the router to factory defaults.	
<input type="button" value="Restore to Factory Defaults"/>	

Figure 3-84 Factory Defaults

Click the <Restore to Factory Defaults> button to reset all configuration settings to their default values.

The default IP address is 192.168.0.1; the default login user name and password are both admin.

3.8.2.2 Export and Import

Choose the menu **Maintenance**→**Management**→**Export and Import** to load the following page.

Configuration Version

Version: 1.1.1

Export

Click <Export> to save your current running configuration to your computer. This is recommended to export the configuration before firmware upgrade or running system maintenance.

Export **Login**

Import

You can import the running configuration by selecting the saved version.

-1 **Import**

Figure 3-85 Export and Import

The following items are displayed on this screen:

➤ **Configuration Version**

Displays the current Configuration version of the Router.

➤ **Export**

Click the <Export> button to save the current configuration as a file to your computer. You are suggested to take this measure before upgrading or modifying the configuration.

➤ **Import**

Click the <Browse> button to locate the update file for the device, or enter the exact path to the saved file in the text box. Then click the <Import> button to restore the saved setting. You should login the device again after importing the new configuration file.



Note:

- To avoid any damage, please don't power down the Router while being restored.
- Configurations may be lost if the configuration file you imported varies greatly from current configurations.

3.8.2.3 Reboot

Choose the menu **Maintenance**→**Management**→**Reboot** to load the following page.

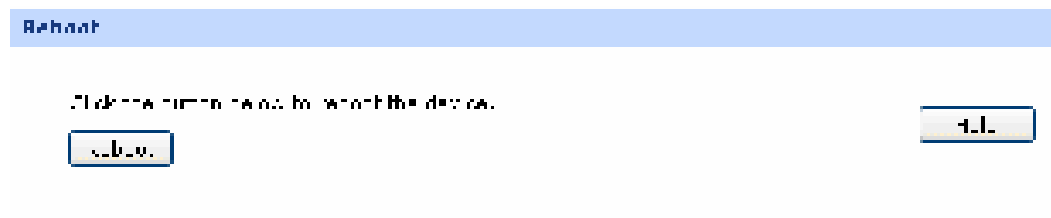


Figure 3-86 Reboot

Click the <Reboot> button to reboot the Router.

The configuration will not be lost after rebooting. The Internet connection will be temporarily interrupted while rebooting.



Note:

To avoid damage, please don't turn off the device while rebooting.

3.8.2.4 Firmware Upgrade

Choose the menu **Maintenance**→**Management** →**Firmware Upgrade** to load the following page.

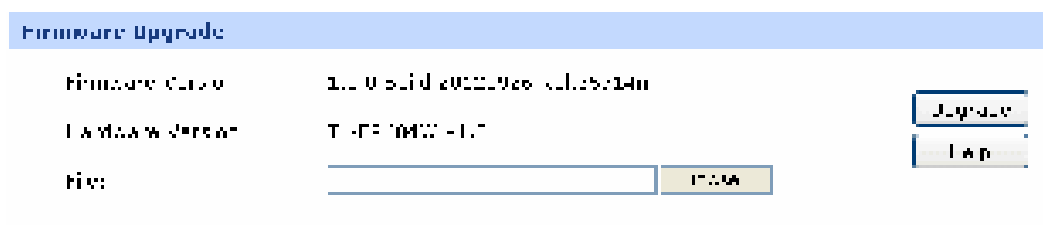


Figure 3-87 Firmware Upgrade

To upgrade the Router is to get more functions and better performance. Go to <http://www.tp-link.com> to download the updated firmware.

Type the path and file name of the update file into the "File" field. Or click the <Browse> button to locate the update file. Then click the <Upgrade> button to complete.



Note:

- After upgrading, the device will reboot automatically.
- To avoid damage, please don't turn off the device while upgrading.
- You are suggested to backup the configuration before upgrading.

3.8.3 License

Choose the menu **Maintenance**→**License** to load the following page.

On this page, you can view the licensed features for the device.

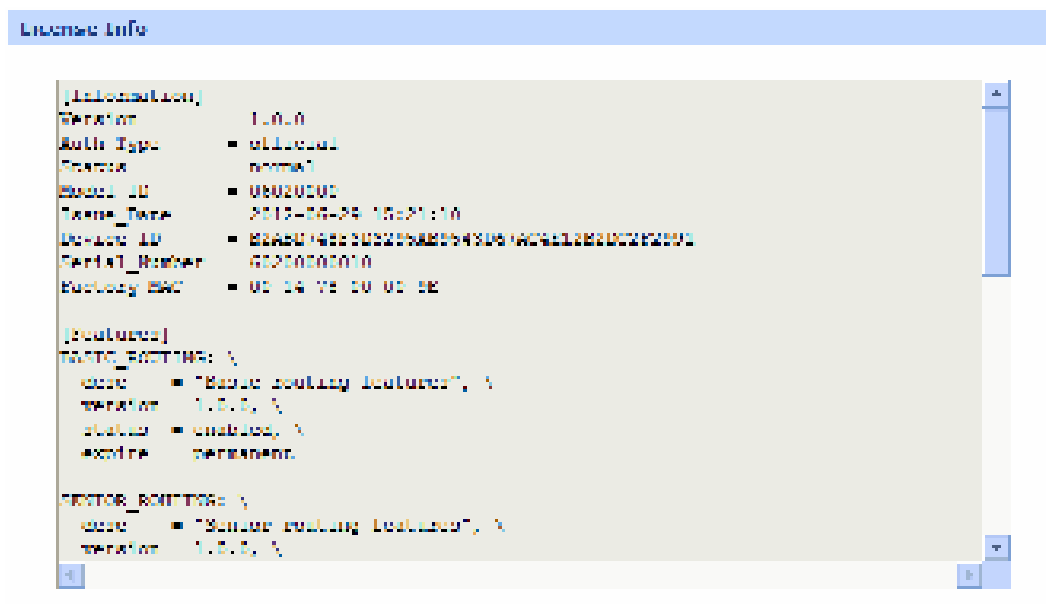


Figure 3-88 License

3.8.4 Statistics

3.8.4.1 Interface Traffic Statistics

Interface Traffic Statistics screen displays the detailed traffic information of each port and extra information of WAN ports.

Choose the menu **Maintenance**→**Statistics**→**Interface Traffic Statistics** to load the following page.

Interface Traffic Statistics						
Interface	Rate Rx (pps)	Rate Tx (pps)	Package Rx (k)	Package Tx (k)	Interface Rx (k-b)	Interface Tx (k-b)
eth1	-	0	0	-	-	0
eth2	-	0	0	-	-	0
A4	1.12	1.12	121.8	12.92	182877	143940

Advanced WAN Information		
Interface	IP fragments rx (k)	General rx - Packets Rx (k)
eth1	-	0
eth2	-	0

Figure 3-89 Interface Traffic Statistics

The following items are displayed on this screen:

➤ Interface Traffic Statistics

Interface: Displays the interface.

Rate Rx : Displays the rate for receiving data frames.

Rate Tx: Displays the rate for transmitting data frames.

Packets Rx: Displays the number of packets received on the interface.

Packets Tx: Displays the number of packets transmitted on the interface.

Bytes Rx: Displays the bytes of packets received on the interface.

Bytes Tx: Displays the bytes of packets transmitted on the interface.

➤ **Advanced WAN Information**

Interface: Displays the interface.

IP Fragment Rx: Displays the amount of IP Fragments received by WAN port.

Abnormal IP Packets Rx: Displays the rate for transmitting data frames.

3.8.4.2 IP Traffic Statistics

IP Traffic Statistics screen displays the detailed traffic information of each PC on LAN.

Choose the menu **Maintenance**→**Statistics**→**IP Traffic Statistics** to load the following page.

General

☒ enable IP traffic statistics Save

☐ enable auto refresh Reset

Traffic Statistics

Duration: Global

LAN-WAN Statistics

No Address	Interface	Upstream	Downstream	Packets	Bytes	Packets	Bytes	Packets	Bytes	Packets
1.1.1.1	eth0	10	10	10	10	10	10	10	10	10
1.1.1.2	eth0	10	10	10	10	10	10	10	10	10
1.1.1.3	eth0	10	10	10	10	10	10	10	10	10

Refresh Clear

Figure 3-90 IP Traffic Statistics

The following items are displayed on this screen:

➤ **General**

Enable IP Traffic Statistics: Allows you to enable or disable IP Traffic Statistics.

Enable Auto-refresh: Allows you to enable/disable refreshing the IP Traffic Statistics automatically. The default refresh interval is 10 seconds.

➤ **Traffic Statistics**

Direction: Select the direction in the drop-down list to get the Flow Statistics of the specified direction.

➤ **IP Traffic Statistics**

This table displays the detailed traffic information of corresponding PCs.

Sorted by: Select the rule for displaying the traffic information.

3.8.5 Diagnostics

3.8.5.1 Diagnostics

This Router provides Ping test and Tracert test functions for network diagnose.

Choose the menu **Maintenance**→**Diagnostics**→**Diagnostics** to load the following page.

Ping

Destination IP Address: 192.168.1.27

100%
Start

```

Ping [ 97.170.170.170 ] with 16 bytes of data:
 1 Reply from 192.168.1.27: Size: 32 bytes of data 1 L 125
 2 Reply from 192.168.1.27: Size: 32 bytes of data 1 L 27
 3 Reply from 192.168.1.27: Size: 32 bytes of data 1 L 125
 4 Reply from 192.168.1.27: Size: 32 bytes of data 1 L 27
 5 Completed.
Ping statistics for 97.170.170.170:
    Packets: Sent = 4, Received = 4, Loss=0.0% (0/4)
    Approximate round trip times in milliseconds:
        Minimum = 0ms, Maximum = 0ms, Average = 1 ms

```

Tracert

Destination IP Address: 202.115.64.226

100%
Start

```

Tracing route to 202.115.64.226 over 30 hops:
  ms          ms          ms           97.170.170.1
 5 Completed.

```

Help

Figure 3-91 Diagnostics

The following items are displayed on this screen:

➤ **Ping**

Destination IP/Domain:

Enter destination IP address or Domain name here. Then select a port for testing, if you select “Auto”, the Router will select the interface of destination automatically. After clicking <Start> button, the Router will send Ping packets to test the network connectivity and reachability of the host and the results will be displayed in the box below.

➤ **Tracert**

Destination IP/Domain:

Enter destination IP address or Domain name here. Then select a port for testing, if Auto is selected, the Router will select the interface of destination automatically. After clicking the <Start> button, the Router will send Tracert packets to test the connectivity of the gateways during the journey from the source to destination of the test data and the results will be displayed in the box below.

3.8.5.2 Online Detection

On this page, you can detect the WAN port is online or not.

Choose the menu **Maintenance**→**Diagnostics**→**Online Detection** to load the following page.

List of WAN Status		
Port	Detecting	Status
WAN1	Active	WAN1 is online.
WAN2	Active	Physical connection is off.

Figure 3-92 Online Detection

The following items are displayed on this screen:

➤ **General**

Port:

Select the port to be detected.

Detecting:

Activate or inactivate Online Detection function. When Online Detection is active, WAN status will depend on the result of both PING and DNS Lookup. When Online Detection is inactive, WAN status will be detected according to physical connection status and

dial-up status.

Mode: Detect automatically or Manually. In Auto mode, gateway will be selected as destination for PING detection, DNS server of WAN port will be selected as destination for DNS Lookup. In Manual Mode, you can configure the destination for PING and DNS Lookup manually.

Ping: Enter the destination IP for Ping in Manual mode. 0.0.0.0 means PING detection is disabled.

DNS Lookup: Enter the IP address of DNS server in Manual mode. 0.0.0.0 means DNS Lookup is disabled.

➤ **List of WAN status**

Port: Displays the detected WAN port.

Detection: Displays whether the Online Detection is enabled.

WAN Status: Display the detecting results.

3.8.6 Time

System Time is the time displayed while the Router is running. On this page you can configure the system time and the settings here will be used for other time-based functions like Access Rule, PPPoE and Logs.

Choose the menu **Maintenance**→**Time**→**Time** to load the following page.

The screenshot shows the 'Time' configuration page. The 'Current Time' section displays the current system time and time zone. The 'Config' section has two tabs: 'Set NTP' and 'Manual'. The 'Set NTP' tab is selected, showing fields for Time Zone, Primary NTP Server, and Secondary NTP Server. The 'Manual' tab is also visible, showing fields for Date and Time, and a button to synchronize with the PC's clock.

Figure 3-93 Time

The following items are displayed on this screen:

➤ **Current Time**

System Time: Displays the current date and time of the Router.

Time Zone: Displays the current time zone of the Router.

Status: Displays the status of time capturing

➤ **Config**

Get GMT: When this option is selected, you can configure the time zone and the IP Address for the NTP Server. The Router will get GMT automatically if it has connected to a NTP Server.

- Time Zone: Select your local time.
- Primary/Secondary NTP Server: Enter the IP Address for the NTP Server.

Manual: With this option selected, you can set the date and time manually.

Synchronize with PC'S Clock: With this option selected, the administrator PC's clock is utilized.



Note:

- If Get GMT function cannot be used properly, please add an entry with UDP port of 123 to the firewall software of the PC.
- The time will be lost when the Router is restarted. The Router will obtain GMT time automatically from Internet.

3.8.7 Logs

The Log system of Router can record, classify and manage the system information effectively.

Choose the menu **Maintenance**→**Logs**→**Logs** to load the following page.

Figure 3-94 Logs

➤ List of Logs

List of Logs displays the system log information in log buffer. An entry of log contains the following four parts:

➤ Config

- Enable Auto-refresh:** With this option selected, the page will refresh automatically every 5 seconds.
- Severity:** Displays the severity level of the log information. You can select a severity level to display the log information with the same level.
- Send System Logs:** Select Send System Logs and specify the server IP, then the new added logs will be sent to the specified server.

The Logs of switch are classified into the following eight levels.

Severity	Level	Description
Emergency	0	The system is unusable.
Alert	1	Action must be taken immediately.
Critical	2	Critical conditions
Error	3	Error conditions
Warning	4	Warnings conditions
Notice	5	Normal but significant conditions
Informational	6	Informational messages
Debug	7	Debug-level messages

Chapter 4 Application

4.1 Network Requirements

The company has established the server farms in the headquarters to provide the Web, Mail and FTP services for all the staff in the headquarters and the branch offices, and to transmit the commercial confidential data to its partners. The dedicated line access service was used by this company, which costs greatly in network maintain and cable layout. With the business development of the company, it's required to establish an effective, safe and stable network with low cost for this company. The detailed requirements are as follows:

➤ Internet Access

This company has terminated the dedicated line access service but maintained one dedicated line as the backup line, and has applied a high-bandwidth Fiber Access as the main line.

➤ Remote Access

It's required to build an effective and safe communication among the headquarters and the branch offices, allow the staff on business to access the Mail Server and FTP Server in LAN, and provide the remote access services for the cooperated partners.


➤ Network Management

To avoid some of the staff using IM/P2P application at the working time to occupy a lot of network bandwidth, it's required to implement the online behavior management and to specify the network bandwidth limit for each staff member.

➤ Network Security

This enterprise network should be able to defend the common attacks from the internal or the external network, such as ARP Attack and DoS Attack. Moreover, the real-time monitoring on the network traffic is required.

4.2 Network Topology

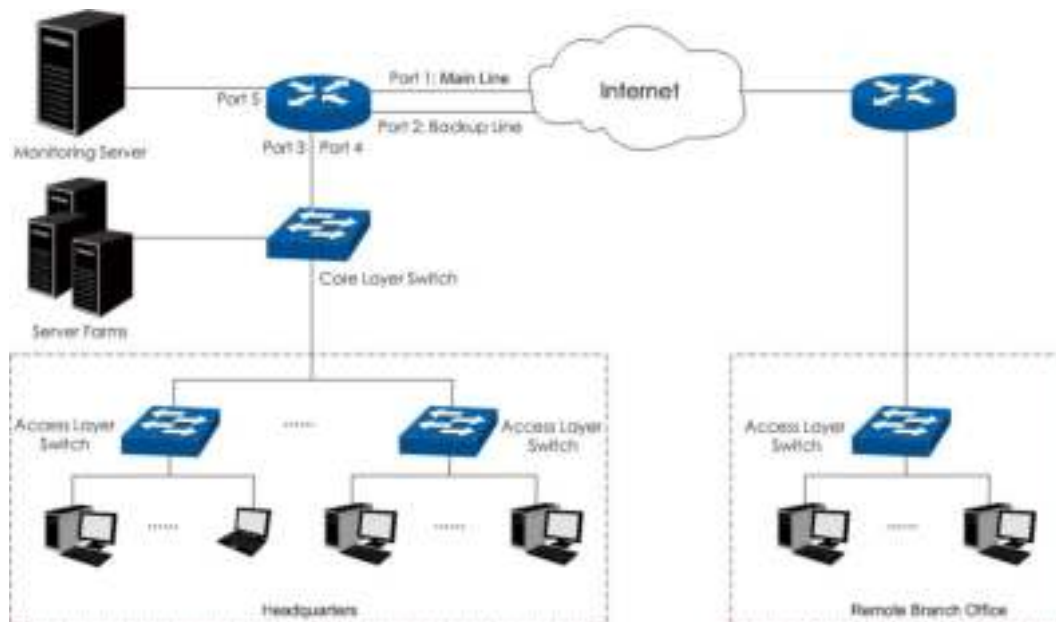

4.3 Configurations

You can configure the Router via the PC connected to the LAN port of this Router. To log in to the Router, the IP address of your PC should be in the same subnet of the LAN port of this Router. (The default subnet of LAN port is 192.168.0.0/24.). The IP address of your PC can be obtained automatically or configured manually.

To access the configuration utility, open a web-browser and type in the default address <http://192.168.0.1> in the address field of the browser, then press the **Enter** key. In the login window, enter **admin** for the User Name and Password, both in lower case letters. Then click the <Login> button to log into the Router.



Tips:

If the LAN IP address is changed, you must use the new IP address to log into the Router.

4.3.1 Internet Setting

You can connect the Fiber Optic Modem and the dedicated line to the WAN1 port and the WAN2 port separately. Suppose both the two connections are the Static IP connections. The Line Backup function enables you to set the connection of WAN1 as the main line and the connection of WAN2 as the backup line, which allows the Router to switch to the connection of WAN2 once the connection of WAN1 is broken down. The detailed configurations are as follows.

4.3.1.1 System Mode

Set the system mode of the Router to the **NAT** mode.

Choose the menu **Network**→**System Mode** to load the following page. Select the **NAT** mode and the <Save> button to apply.



Figure 4-1 System Mode

4.3.1.2 Internet Connection

Configure the **Static IP** connection type for the WAN1 and WAN2 ports of the Router.

Choose the menu **Network**→**WAN**→**WAN1** to load the following page. Select the **Static IP** connection type and enter the **IP address**, **Subnet Mask** and **Default Gateway** provided by your ISP. Set both the **Upstream Bandwidth** and the **Downstream Bandwidth** to 100000Kbps. The Upstream/Downstream Bandwidth of WAN port you set must not be more than the bandwidth provided by ISP. Otherwise the Traffic Control will be invalid. Then click the <Save> button to apply. The configuration method for the WAN2 port is the same as the WAN1.

Static IP Settings		
Connection Type:	Static IP	<input type="button" value="Save"/> <input type="button" value="Add"/>
IP Address:	28.21.122.2	
Subnet Mask:	255.255.255.0	
Default Gateway:	28.21.122.254 (Optional)	
MTU:	576 (1572-576)	
Primary DNS:	208.28.24.5 (Optional)	
Secondary DNS:	190.2.0 (Optional)	
Upstream Bandwidth:	100,000 Kbps	
Downstream Bandwidth:	100,000 Kbps	

Figure 4-2 WAN – Static IP

4.3.1.3 Link Backup

Set the connection of WAN1 as the primary link, the connection of WAN 2 as the secondary link.

Choose the menu **Advanced**→**Load Balance**→**Link Backup** to load the configuration page. Select WAN1 as Primary WAN, WAN2 as Backup WAN, select the Failover mode as Figure 4-3 shown, and then click the <Add> button to apply.

General

WAN Port

WAN1

WAN2

Add

Clear

Full

Link Backup

Primary WAN

Backup WAN

WAN1

WAN2

Mode

☐ Link Up
☒ Link Down

Priority

☐ Backup WAN when the priority WAN port is down
☒ Backup WAN when the priority WAN port is down

State

☒ Enable
☐ Inactive

List of Rules

No.	Primary WAN	Backup WAN	Rule	Effective time	Status	Action
No Rules						

Search

Add

Modify

Delete

Figure 4-3 Link Backup

4.3.2 VPN Setting

To enable the hosts in the remote branch office (WAN: 116.31.85.133, LAN: 172.31.10.1) to access the servers in the headquarters, you can create the VPN tunnel via the TP-LINK VPN routers between the headquarters and the remote branch office to guarantee a secured communication. The following takes IPsec settings of the Router in the headquarters for example.

Moreover, you can configure the PPTP VPN Server to establish a remote mobile office, which enables the staff on business to access the FTP server and Mail server in the headquarters via PPTP dial-up connection.

4.3.2.1 IPsec VPN

1) IKE Setting

To configure the IKE function, you should create an IKE Proposal firstly.

• IKE Proposal

Choose the menu **VPN→IKE→IKE Proposal** to load the configuration page.

Settings:

Proposal Name: proposal_IKE_1

Authentication: MD5

Encryption: 3DES

DH Group: DH2

Click the <Add> button to apply.

IKE Proposal

Proposal Name:	<input type="text" value="proposal_IKE_1"/>	<input type="button" value="Add"/>
Exchange Mode:	<input type="button" value="Main"/>	<input type="button" value="Edit"/>
Authentication:	<input type="button" value="XAuth"/>	<input type="button" value="Del"/>
IPsec Group:	<input type="button" value="IPsec"/>	

Figure 4-4 IKE Proposal

- **IKE Policy**

Choose the menu **VPN→IKE→IKE Policy** to load the configuration page.

Settings:

Policy Name:	IKE_1
Exchange Mode:	Main
IKE Proposal:	proposal_IKE_1 (you just created)
Pre-shared Key:	aabbccdde
SA Lifetime:	3600
DPD:	Enable
DPD Interval:	10

Click the <Add> button to apply.

IKE Policy

Main Mode:	<input type="text" value="IKE_1"/>	<input type="button" value="Add"/>
Exchange Mode:	<input checked="" type="radio"/> Main <input type="radio"/> Aggressive	<input type="button" value="Cancel"/>
Local ID Type:	<input checked="" type="radio"/> IP Address <input type="radio"/> Tunnel	<input type="button" value="Help"/>
Local ID:	<input type="text" value="Local ID/ID IP"/>	
Remote ID Type:	<input checked="" type="radio"/> IP Address <input type="radio"/> Tunnel	
Remote ID:	<input type="text" value="Remote ID/ID IP"/>	
IKE Proposal 1:	<input type="text" value="proposal_IPsec_1"/> <input type="button" value="v"/>	
IKE Proposal 2:	<input type="text" value="..."/> <input type="button" value="v"/>	
IKE Proposal 3:	<input type="text" value=""/> <input type="button" value="v"/>	
IKE Proposal 4:	<input type="text" value="..."/> <input type="button" value="v"/>	
Local Auth Key:	<input type="text" value="LocalAuthKey"/>	
Local Address:	<input type="text" value="10.0.0.1"/> <input type="button" value="Get (0.0.0.0-255.255.255)"/>	
Local ID:	<input checked="" type="radio"/> Address <input type="radio"/> Tunnel	
Local Network:	<input type="text" value="0"/> <input type="button" value="Get (0-255)"/>	

List of IKE Policy

No.	Name	Type	Proposal 1	Proposal 2	Proposal 3	Proposal 4	Status
No entries							

Figure 4-5 IKE Policy



Tips:

For the VPN Router in the remote branch office, the IKE settings should be the same as the Router in the headquarters.

2) IPsec Setting

To configure the IPsec function, you should create an IPsec Proposal firstly.

• IPsec Proposal

Choose the menu **VPN→IPsec→IPsec Proposal** to load the following page.

Settings:

Proposal Name:

Security Protocol:

ESP Authentication:

ESP Encryption:

Click the <Save> button to apply.

IPsec Proposal	
Proposal Name:	<input type="text" value="proposal_IPsec_1"/>
Security Protocol:	<input type="text" value="ESP"/> ▼
ESP Authentication:	<input type="text" value="MD5"/> ▼
ESP Encryption:	<input type="text" value="3DES"/> ▼

Figure 4-6 IPsec Proposal

- **IPsec Policy**

Choose the menu **VPN→IPsec→IPsec Policy** to load the configuration page.

Settings:

IPsec:	Enable
Policy Name:	IPsec_1
Status:	Activate
Mode	LAN-to-LAN
Local Subnet:	192.168.0.0/24
Remote Subnet:	172.31.10.0/24
WAN:	WAN1
Remote Gateway:	116.31.85.133
Exchange Mode	IKE
IKE Policy:	IKE_1
IPsec Proposal:	proposal_IPsec_1 (you just created)
PFS:	DH1
SA Lifetime:	3600

Click the <Add> button to add the new entry to the list and click the <Save> button to apply.

General

IPsec ☒ IKEv1 ☐ IKEv2

IPsec Policy

Policy Name:

Policy:

Local Subnet:

Remote Subnet:

Mode:

Remote Gateway: (IP Address/Domain Name)

Policy Mode: ☒ IPsec ☐ Manual

IPsec Policy:

IPsec Protocol 1:

IPsec Protocol 2:

IPsec Protocol 3:

IPsec Protocol 4:

ESP:

SA Lifetime: Sec (120 x 64000)

Priority: ☒ Always ☐ Intermediate

Figure 4-7 IPsec Policy



Tips:

For the VPN Router in the remote branch office, the IPsec settings should be consistent with the Router in the headquarters. The Remote Gateway of the remote Router should be set to the IP address of the Router in the headquarters.

After the IPsec VPN tunnel of the two peers is established successfully, you can view the connection information on the **VPN→IPsec→IPsec SA** page.

List of IPsec SA									
No.	Name	SPI	Tunnel	Data Flow	Protocol	AH Auth	ESP Auth	ESP Encr	Status
1	ipsec_1	679513675<-> 663198743	58.51.139.2<-> 116.31.85.133	192.168.0.0/24<-> 172.31.10.0/24	ESP	—	MD5	3DES	Connected

Figure 4-8 List of IPsec SA

4.3.2.2 PPTP VPN Setting

• IP Address Pool

Choose the menu **VPN→L2TP/PPTP→IP Address Pool** to load the following page. Enter the **Pool Name** and the **IP Address Range** as the following figure shown. Click the <Add> button to apply.

IP Address Pool			
Pool Name:	PPTP_Dialup_User		<input type="button" value="Add"/>
IP Address Range:	10.0.0.100	10.0.0.255	<input type="button" value="Add"/>
<input type="button" value="Del"/>			
List of IP Address Pool			
No.	Pool Name	IP Address Range	Action
No entries			
<input type="button" value="Add New"/> <input type="button" value="Delete"/> <input type="button" value="Save"/>			

- **L2TP/PPTP Tunnel**

Choose the menu **VPN→L2TP/PPTP→L2TP/PPTP Tunnel** to load the following page. Check the box of **Enable VPN-to-Internet** to allow the PPTP clients to access the local enterprise network and the Internet. Then continue with the following settings for the PPTP Tunnel.

Settings:

L2TP/PPTP:	Enable
Protocol:	PPTP
Mode:	Server
Username:	PPTP
Password:	abcdefg
Tunnel:	Client-to-LAN
IP Pool:	PPTP_Dialup_User (you just created)

Click the <Save> button to apply.

General

☒ Enable P2P to Internet
 Min Interval: 10 Max: 60 ~ 600

IM/P2P Control

Process

☐ L2TP ☒ P2P

Mode

☒ Normal ☐ Strict

Account Name

Password

Limit

File Size

14M

Max Connections

1

(1-10)

Exempt

☒ Private ☐ Public

Exempted Days

Client IP

To Address Port

P2P Port

1000

Port Forward

Share

☒ Available ☐ Unavailable

List of Configurations

ID	Process	Account Name	Name	Time	Server IP	IP Address Port	Exempted Days	Exempt	Share	Comment
No records.										

4.3.3 Network Management

To manage the enterprise network effectively and forbid the Hosts within the IP range of 192.168.0.30-192.168.0.50 to use IM/P2P application, you can set up a User Group and specify the network bandwidth limit and session limit for this group. The detailed configurations are as follows.

4.3.3.1 User Group

Create a User Group with all the Hosts in the IP range of 192.168.0.30-192.168.0.50 as its group members.

• Group

Choose the menu **User Group**→**Group** to load the following page. Enter the **Group Name** and the **Description** to create a Group as the following figure shows.

Group Config

Group Name

Description

Figure 4-9 Group Config

• User

Choose the menu **User Group**→**User** to load the configuration page. Click the <Batch> button to enter the batch processing screen. Then continue with the following settings:

Settings:

Action: Add

Start IP Address: 192.168.0.30

End IP Address: 192.168.0.50

Prefix Username: User

Start No.: 1

Step: 1

Click the **OK** button to add the Users in bulk.



Figure 4-10 User Config - Batch

- **View**

Choose the menu **User Group**→**View** to load the configuration page. Add all the Users you just created into the Group 1 and click the <Save> button to apply.

4.3.3.2 App Control

Choose the menu **Firewall** □ **App Control** □ **Control Rules** to load the configuration page. Check the box before **Enable Application Control** and click <Save> to apply. Then continue with the following settings:

Settings:

Object: Group

Group: group1

Application: Click the <Application List> button and select the applications desired to be blocked on the popup window.

Status: Activate

General

☒ Enable Application Control <Save>

Control Rules

Object: ☒ App ☐ App

App: <Add>

Application: <Edit>

Time of Day: -

☒ Allow ☒ Deny ☒ Trust ☒ Untrust ☒ Trust ☒ Untrust ☒ Deny

Description: <Description>

Status: ☒ Enabled ☐ Inactive

Figure 4-11 App Rules

4.3.3.3 Bandwidth Control

To enable Bandwidth Control, you should configure the total bandwidth of interfaces and the detailed bandwidth control rule first.

1) Enable Bandwidth Control

Choose the menu **Advanced** > **Traffic Control** > **Setup** to load the configuration page. Check the box before **Enable Bandwidth Control** and click the <Save> button to apply.

General

☐ Disable Bandwidth Control

☒ Enable Bandwidth Control

☐ Enable Bandwidth Control and change default usage priority %

Default Limit

Direction	Initial Bandwidth (kbps)
Upstream	<input type="text" value="1000000"/>
Downstream	<input type="text" value="1000000"/>

Interface Bandwidth

Interface	Upstream Bandwidth (Mbps)	Downstream Bandwidth (Mbps)
WAN1	1000000	1000000
WAN2	1000000	1000000
Total	2000000	2000000

<Save> <Cancel> <Traffic Statistics> <Help>

Figure 4-12 Bandwidth Setup

2) Interface Bandwidth

Choose the menu **Network** > **WAN** > **WAN1** to load the configuration page. Configure the **Upstream Bandwidth** and **Downstream Bandwidth** of the interface as Figure 4-13 shows. The entered bandwidth value should be consistent with the actual bandwidth value.

3) Bandwidth Control Rule

Choose the menu **Advanced** ▢ **Traffic Control** ▢ **Bandwidth Control** to load the configuration page.
Then continue with the following settings:

Settings:

Direction: LAN -> WAN1
Group: group1
Mode: Individual
Guaranteed Bandwidth (Up/Down): 100
Limited Bandwidth (Up/Down): 800
Effective Time: Keep the default value
Status: Activate

Click the <Add> button to apply.

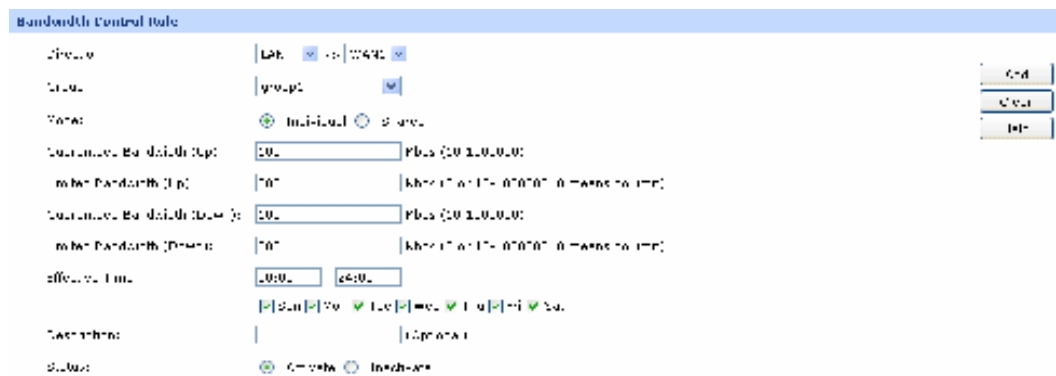


Figure 4-14 Bandwidth Control Rule

4.3.3.4 Session Limit

Choose the menu **Advanced** ▢ **Session Limit** ▢ **Session Limit** to load the configuration page. Check the box before **Enable Session Limit** and click the <Save> button to apply. Then continue with the following settings:

Settings:

Group: group1
Max. Sessions: 250
Status: Activate

Click the <Add> button to apply.

Figure 4-15 Session Limit

4.3.4 Network Security

You can enable the IP-MAC Binding function to defend the ARP attack from local or public network and enable Sending GARP packets function to defend ARP attack. Moreover, you can enable DoS Defense function to implement flood defense and Packet Anomaly Defense. Moreover, you can enable Port Mirror function and Statistics function to monitor the real-time traffic of the local network.

4.3.4.1 LAN ARP Defense

You can configure IP-MAC Binding manually or by ARP Scanning. For the first time configuration, please bind most of the ARP information by ARP Scanning. For some special items not bound, you can bind them manually.

1) Scan and import the entries to ARP List

Specify ARP Scanning range.

Choose the menu **Firewall** > **Anti ARP Spoofing** > **ARP Scanning** to load the configuration page. No ARP attack in the local network is the premise of ARP Scanning.

Figure 4-16 ARP Scanning

Turn on all the hosts that need to be bound. Then click the <Scan> button, the scanning result will display as below.

No.	IP Address	MAC Address	Status
<input type="checkbox"/> 1	1.1.1.1	48-61-56-00-00-00	
<input type="checkbox"/> 2	192.168.0.1	48-61-56-00-00-00	

Figure 4-17 Scanning Result

Choose the menu **Firewall** ▢ **Anti ARP Spoofing** ▢ **IP-MAC Binding** to load the configuration page. Select the ARP entries needed to be bound or click the <Select All> button, and then click the <Import> button. The ARP List will display as the following figure shows.

ARP List				
	ID	IP Address	MAC Address	Status
<input checked="" type="checkbox"/>	1	192.168.1.10	00-11-22-33-44-AA	...
<input type="checkbox"/>	2	192.168.1.20	00-11-22-33-44-BB	...
<input checked="" type="checkbox"/>	3	192.168.1.30	00-11-22-33-44-CC	...

Figure 4-18 ARP List

2) Set IP-MAC Binding Entry Manually

Configure the IP-MAC Binding entry manually and add it to ARP List.

Choose the menu **Firewall** ▢ **Anti ARP Spoofing** ▢ **IP-MAC Binding** to load the configuration page. To add the host with IP address of 192.168.1.20 and MAC address of 00-11-22-33-44-aa to the list, you can follow the settings below:

Settings:

IP Address: 192.168.0.20

MAC Address: 00-11-22-33-44-aa

Status: Activate

Click the <Add> button to apply. The other entries can be added in the same way.

3) Set Attack Defense

Choose the menu **Firewall** ▢ **Anti ARP Spoofing** ▢ **IP-MAC Binding** to load the configuration page. Select all the items for **General** and set the GARP packets sending interval to be 1ms as the following figure shows. Then click the <Save> button to apply.

General	
<input checked="" type="checkbox"/>	enable Anti Spoofing Defense
<input checked="" type="checkbox"/>	enable GARP packets blocking, the GARP sending interval is 1ms
<input checked="" type="checkbox"/>	send GARP packets when ARP table is updated
<input checked="" type="checkbox"/>	enable GARP logs

Figure 4-19 IP-MAC Binding

4.3.4.2 WAN ARP Defense

To prevent the WAN ARP attack, you can bind the default gateway and IP address of WAN port.

Obtain the MAC address of WAN port by ARP Scanning first.

Choose the menu **Firewall** ▢ **Anti ARP Spoofing** ▢ **ARP Scanning** to load the configuration page. Enter the default gateway of the WAN port such as 58.51.128.254 in the Scanning Range field and click the <Scan> button, the MAC address of the WAN port will display in the Scanning Result table.

General

Scanning Range: 58.51.128.254 | 58.51.128.254 |

Scan

Clear

After obtaining the MAC address of WAN port from Scanning Result table, select this entry, then click the <Import> button to finish the binding operation.

4.3.4.3 Attack Defense

Choose the menu **Firewall** ▢ **Attack Defense** ▢ **Attack Defense** to load the configuration page. Select the options desired to be enabled as Figure 4-20 shows, and then click the <Save> button.

General

Flood Defense

☒ Enable maximum SYN flood

level: 800 PPS

☒ Enable maximum UDP flood

level: 800 PPS

☒ Enable maximum ICMP flood

level: 800 PPS

☒ Enable maximum TCP SYN flood

level: 800 PPS

☒ Enable maximum UDP flood

level: 800 PPS

☒ Enable maximum ICMP flood

level: 800 PPS

Backlist Anomaly Detection

☐ Enable High Rate Traffic

☐ Enable TCP Scan Attack (RST/Max/Fin)

☐ Enable Ping of Death

☒ Enable Large Ping

☒ Enable WinNuke Attack

☒ Enable Ping from MIB

☒ Enable TCP Denial of Service (SYN and RST Attack)

☒ Enable TCP Denial of Service (RST Attack, Out of Order Buffer)

☒ Enable Spoofing

☒ Security Option

☒ Large Service Entry Option

☒ Strict Security Rule Option

☒ Reverse Rule Option

☒ Stream Option

☒ Timestamp Option

☒ No Spoofing Option

Log

☒ Enable Attack Defense Log

Save

Cancel All

Load All

Help

Figure 4-20 Attack Defense

4.3.4.4 Traffic Monitoring

1) Port Mirror

Choose the menu **Network**→**Switch**→**Port Mirror** to load the configuration page. Check the box before **Enable Port Mirror** and select the **Ingress&Egress** mode. Select the Port 5 for the Mirroring Port and the Port 3 and the Port 4 for the Mirrored ports. Click the <Save> button to apply.

Port	Mirroring Port	Mirrored Port
1	<input type="radio"/>	<input type="checkbox"/>
2	<input type="radio"/>	<input type="checkbox"/>
3	<input type="radio"/>	<input checked="" type="checkbox"/>
4	<input type="radio"/>	<input checked="" type="checkbox"/>
5	<input checked="" type="radio"/>	<input type="checkbox"/>

Figure 4-21 Port Mirror

2) Statistics

Choose the menu **Maintenance** ▢ **Statistics** to load the page.

Load the **Interface Traffic Statistics** page to view the traffic statistics of each physical interface of the Router as Figure 4-22 shows.

Interface Traffic Statistics						
Interface	Pkts Rx (Kbps)	Pkts Tx (Kbps)	Bytes Rx (Kb/s)	Bytes Tx (Kb/s)	Errors Rx (Pkts/s)	Errors Tx (Pkts/s)
WAN0	5.541	1.015	347.1	230.5	0.00004	1.32011
WAN1	0	-	-	0	0	0.0
LAN	0	-	0.000	1.00.0	49.1.1.1	1411.0.0

Advanced WAN Information		
Interface	TCP Frequency Rx (Pkts)	Advanced IP Bytes Rx (Kbps)
WAN0	0	-
WAN1	0	-

PreviousViewNext

Figure 4-22 Interface Traffic Statistics

Load the **IP Traffic Statistics** page, and Check the box before **Enable IP Traffic Statistics** and **Enable Auto-refresh**, then click the <Save> button to apply. Select the data direction, the corresponding IP traffic statistics will display in the Statistics table as Figure 4-23 shows.

General

☒ enable IP traffic statistics
 ☐ enable flow refresh

Traffic Statistics

Direction: Outgoing

LAN-to-WAN Statistics

# of Entries	Rate (avg. Pkts/s)		Average Rate (Pps)		Total Packets (k)		Total Bytes (byte)		Success
	Upstream	Downstream	Upstream	Downstream	Upstream	Downstream	Upstream	Downstream	
1.2.100.100	1	1	10	10.0	100	10.0	0	10.0	1.0
192.168.1.2	0.0	0	0	0.0	0	0.0	0.0	0.0	0.0

Search by: Downstream Packets Per: Incoming Group

Figure 4-23 IP Traffic Statistics

After all the above steps, the enterprise network will be operated based on planning.

Appendix A Hardware Specifications

General	
Standards	IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x, IEEE 802.11b, IEEE 802.11g and IEEE 802.11n, TCP/ IP, DHCP, ICMP, NAT, PPPoE, SNTP, HTTP, DNS, L2TP, PPTP, IPsec
Ports	One fixed 10/100/1000Mbps Auto-Negotiation WAN RJ45 port (Auto MDI/MDIX)
	One interchangeable 10/100/1000Mbps Auto-Negotiation WAN/LAN RJ45 port (Auto MDI/MDIX)
	Three fixed 10/100/1000Mbps Auto-Negotiation LAN RJ45 ports (Auto MDI/MDIX)
Cabling Type	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m)
	100BASE-TX: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m)
	1000BASE-T: UTP/STP of Category 5, 5e, 6 or above (maximum 100m)
LEDs	PWR, SYS, WLAN, WAN, LAN
Safety & Emissions	FCC, CE
Wireless	
Frequency Band*	2.4~2.4835GHz
Radio Data Rate	11n : up to 300Mbps (Automatic) 11g : 54/48/36/24/18/12/9/6M (Automatic) 11b : 11/5.5/2/1M (Automatic)
Frequency Expansion	DSSS (Direct Sequence Spread Spectrum)
Modulation	11b : CCK , QPSK , BPSK 11g : OFDM 11n : QPSK , BPSK , 16-QAM , 64-QAM
Security	WPA/WPA2 ; 64/128/152-WEP ; TKIP/AES
Antenna Gain	5dBi * 2
Environmental and Physical	
Temperature.	Operating : 0 ° ~40 ° (32 ° ~104 °)
	Storage: -40 ° ~70 ° (-40 ° ~158 °)
Humidity	Operating: 10% - 90% RH, Non-condensing
	Storage: 5% - 90% RH, Non-condensing

Appendix B FAQ

Q1: What can I do if I cannot access the web-based configuration page?

1. For the first login, please try the following steps:
 - 1) Make sure the cable is well connected to the LAN port of the Router. The corresponding LED should flash or be solid light.
 - 2) Make sure the IP address of your PC is set in the same subnet addresses of the Router. It's recommended to set your PC to get the IP address automatically. Then the Router with DHCP enabled can automatically assign the IP address to your PC. If you want to configure your PC manually, please set 192.168.0.x ("x" is any number between 2 to 254) for the IP address and 255.255.255.0 for the Subnet Mask.
 - 3) Test the connection between your PC and TL-ER604W via Ping command.
 - 4) If you still cannot access the configuration page, please restore your Router to its factory default settings and try to log in again.
2. If your management port has been changed, please log into the Router with the new address, such as <http://192.168.0.1:XX> ("XX" is the new management port number).
3. If you had successfully logged into the Router before, but now you cannot access the Router. It's quite possible that the configuration of your Router has been changed by others, especially when the Remote Web Management function is enabled. You're recommended to restore your Router and reconfigure the management port number and the username as well as the password for your network security.
4. If you cannot access the Router even after restoring the Router to its defaults, or your login is dropped down just after a while, it's quite possible that your Router is attacked by ARP cheating. It's recommended to locate and quarantine the source of ARP cheating so as to prevent your network from the attacks.
5. Check to see if you have configured the proxy server for IE browser. If so, please disable the IE proxy server first.

Q2: What can I do if I forgot the username and the password of the Router? How to restore the Router to its factory default settings?

You can restore the Router to its factory default settings by the **Reset** button. It must be noted that once the Router is reset, all the current configuration settings will be lost.

With the Router powered on, use a pin to press and hold the **Reset** button for about 5~10 seconds. After the M1 LED is solid light for 2~5 seconds, release the **Reset** button. When the M1 and M2 LEDs flash simultaneously for about one second, the Router is restored successfully. The default management address of the Router is **http://192.168.0.1**, and the default username and the password are both **admin**.

Q3: What can I do if the Router with the remote management function enabled cannot be accessed by the remote computer?

1. Make sure that the IP address of the remote computer is in the subnet allowed to remotely access the router.
2. If the router's management port has been modified, please log into the Router with the new address, such as `http://192.168.0.1:XX` ("XX" is the new management port number).
3. Check to see if the management port has been mapped to the service port of the LAN host in the Virtual Server function. If so, you should change the router's management port or virtual server's service port.
4. Make sure that the NAT DMZ service is disabled.

Q4: Some functions of the Router need to define the IP address subnet with Subnet Mask. What are the common values of the Subnet Mask?

Subnet Mask is a 32-bit binary address used for distinguishing the network address and the host address. When dividing the network, the different Subnet Mask defines different subnet, and the amount of hosts in each subnet is different.

After converted from 32-bit binary address to decimal address, the common Subnet Mask values can be 8 (which represents the default Subnet Mask value of class A: 255.0.0.0), 16 (which represents the default Subnet Mask value of class B: 255.255.0.0), 24 (which represents the default Subnet Mask value of class C: 255.255.255.0) or 32 (which represents the default Subnet Mask value of class D: 255.255.255.255).

Appendix C Glossary

	Glossary	Description
A	ALG (Application Layer Gateway)	Application Level Gateway (ALG) is application specific translation agent that allows an application on a host in one address realm to connect to its counterpart running on a host in different realm transparently.
	ARP (Address Resolution Protocol)	Internet protocol used to map an IP address to a MAC address.
	AH(Authentication Header)	A security protocol that provides data authentication and optional anti-replay services. AH is embedded in the data to be protected (a full IP datagram).
D	DDNS (Dynamic Domain Name Server)	The capability of assigning a fixed host and domain name to a dynamic Internet IP address.
	DHCP (Dynamic Host Configuration Protocol)	A protocol that automatically configure the TCP/IP parameters for the all the PCs that are connected to a DHCP server.
	DMZ (Demilitarized Zone)	A Demilitarized Zone allows one local host to be exposed to the Internet for a special-purpose service such as Internet gaming or videoconferencing.
	DNS (Domain Name Server)	An Internet Server that translates the names of websites into IP addresses.
	DSL (Digital Subscriber Line)	A technology that allows data to be sent or received over existing traditional phone lines.
E	ESP (Encapsulating Security Payload)	Security protocol that provides data privacy services, optional data authentication, and anti-replay services. ESP encapsulates the data to be protected.
F	FTP (File Transfer Protocol)	Application protocol, part of the TCP/IP protocol stack, used for transferring files between network nodes.
G	GMT (Greenwich Mean Time)	It is a term originally referring to mean solar time at the Royal Observatory in Greenwich, London.

	Glossary	Description
H	H.323	H.323 allows dissimilar communication devices to communicate with each other by using a standardized communication protocol. H.323 defines a common set of CODECs, call setup and negotiating procedures, and basic data transport methods.
	HTTP (Hypertext Transfer Protocol)	The protocol used by Web browsers and Web servers to transfer files, such as text and graphic files.
I	ICMP (Internet Control Messages Protocol)	Network layer Internet protocol that reports errors and provides other information relevant to IP packet processing.
	Internet	Largest global Internetwork, connecting tens of thousands of networks worldwide and having a “culture” that focuses on research and standardization based on real-life use.
	IP (Internet Protocol)	Network layer protocol in the TCP/IP stack offering a connectionless Internetwork service. IP provides features for addressing, type-of-service specification, fragmentation and reassembly, and security.
	ISP (Internet Service Provider)	Company that provides Internet access to other companies and individuals.
	IKE (Internet Key Exchange)	IKE establishes a shared security policy and authenticates keys for services (such as IPSec) that require keys. Before any IPSec traffic can be passed, each Router/firewall/host must verify the identity of its peer.
L	IPsec (IP Security)	A framework of open standards that provides data confidentiality, data integrity, and data authentication between participating peers.
	LAN (Local Area Network)	High-speed, low-error data network covering a relatively small geographic area (up to a few thousand meters). LANs connect workstations, peripherals, terminals, and other devices in a single building or other geographically limited area.

	Glossary	Description
M	MAC address (Media Access Control address)	Standardized data link layer address that is required for every port or device that connects to a LAN. Other devices in the network use these addresses to locate specific ports in the network and to create and update routing tables and data structures. MAC addresses are 6 bytes long and are controlled by the IEEE.
	MTU (Maximum Transmission Unit)	The size in bytes of the largest packet that can be transmitted.
N	NAT (Network Address Translator)	Mechanism for reducing the need for globally unique IP addresses. NAT allows an organization with addresses that are not globally unique to connect to the Internet by translating those addresses into globally routable address space.
	NTP Server	NTP Server is used for synchronising the time across computer networks.
P	POP3 (Post Office Protocol 3)	POP3 is intended to permit a workstation to dynamically access a maildrop on a server host in a useful fashion.
	PPPoE (Point-to-Point Protocol over Ethernet)	PPPoE is a network protocol for encapsulating Point-to-Point Protocol (PPP) frames inside Ethernet frames.
S	SMTP (Simple Mail Transfer Protocol)	SMTP is an Internet standard for electronic mail (e-mail) transmission
	SSH (Secure Shell Protocol)	SSH is a network protocol that allows data to be exchanged using a secure channel between two networked devices.
	SA (Security Association)	SA is the establishment of shared security attributes between two network entities to support secure communication.
	TCP (Transfer Control Protocol)	Connection-oriented transport layer protocol that provides reliable full-duplex data transmission.
T	TCP/IP (Transmission Control Protocol/ Internet Protocol)	Common name for the suite of protocols to support the construction of worldwide Internet works. TCP and IP are the two best-known protocols in the suite.
	Telnet (Telecommunication	Telnet is used for remote terminal connection, enabling users to

	Glossary	Description
	Network protocol)	log in to remote systems and use resources as if they were connected to a local system.
U	UDP (User Datagram Protocol)	UDP is a simple protocol that exchanges datagram without acknowledgments or guaranteed delivery, requiring that error processing and retransmission be handled by other protocols.
	UPnP (Universal Plug and Play)	UPnP is a set of networking protocols for primarily residential networks without enterprise class devices that permits networked devices.
	URL (Uniform Resource Locator)	URL describes the access method and the location of an information resource object on the Internet
V	VLAN (Virtual Local Area Network)	Group of devices on one or more LANs that are configured (using management software) so that they can communicate as if they were attached to the same wire, when in fact they are located on a number of different LAN segments. Because VLANs are based on logical instead of physical connections, they are extremely flexible.
	VPN (Virtual Private Network)	Enables IP traffic to travel securely over a public TCP/IP network by encrypting all traffic from one network to another.
W	WAN (Wide Area Network)	Data communications network that serves users across a broad geographic area and often uses transmission devices provided by common carriers.